

Multimedia Projector EMP-732

EPSON

Race through and lighten the workload



Designed for the business road warrior, the EMP-732 is the lightest Epson micro-portable 3LCD projector to date. Epson's latest introduction brings ultimate brightness, portability and clarity of images to the professional consumers.

Distinct Levels of Brightness, Portability and Clear Images

2000 Lumens of Brightness in 1.7kg

EMP-732 delivers up to 2000 lumens of brightness and weigh just 1.7kg. With its brightness and lightweight, Epson is widening the gap between EMP-732 and other projectors.

3LCD Technology

3LCD technology achieves brighter, more natural images and smoother, sharper video playback. No color breakup makes images gentler on the eyes.



Exceptionally Convenient Features

Quick Start-Up and Shut-Down

With an incredibly short start-up time (7 seconds), an amazing 20-second shut-down time and a helpful indicator sound to tell you when the projector is ready to be unplugged.

Remote Controller

Well-marked remote buttons and mouse capabilities, provide the user with a highly functional remote controller able to direct an onscreen pointer which can be used with DVDs, videos and many other formats of media.



Well Marked Operation Panel and Remote Controller

Epson is focused on making our projectors easy to use for beginners and experts alike. At a glance, EMP-732's operation is clear and easy to understand.

Automatic Keystone Correction

Auto keystone correction automatically detects the projector's vertical angle and adjusts the vertical keystone distortion instantly.



Six Selectable Projection Modes & Brightness Control

Dynamic/Presentation/Theatre/Living Room/sRGB/Blackboard
EMP-732's six preset settings allow you to select a mode that best suits your viewing material and environment. As well, you can choose between high brightness mode (2000lm) and low brightness mode (1500lm).

Single-Foot Release Lever

The well-balanced single-foot has an easily accessible release lever which allows the user to adjust the projection level with just one hand.



Security Functions

Power-On Protect/User's Logo Protect/Time Protect/Key Lock
With three password protect functions and key lock functionality, the EMP-732 has your security concerns covered. So, regardless of theft or mischief, your projector is protected with these innovative security functions.



...and more features.

Advanced Help Function, Front Exhaust Fan, Source Search, Soft Carrying Case and more...

Specifications

Model	EMP-732
Part Number	V11H187052
Projection System	Epson original 3LCD prism technology
Projection Method	Front / rear / ceiling mount
LCD	
Size	0.7" with MLA
Driving Method	Epson Poly-Silicon TFT LCD Active Matrix
Pixel Number	786,432 (1024 x 768) pixels x 3
Native Resolution	XGA
Aspect Ratio	4:3
Pixel Arrangement	Stripe
Projection Lens	
Type	Manual : Zoom / Focus
F-number	1.58 - 1.76
Focal Length	23.7 - 28.5mm
Zoom Ratio	1:1.2
Lamp	
Type	UHE 170W
Life (Typical)	2000 hours (High Brightness Mode) / 3000 hours (Low Brightness Mode)
Screen Size (Projected Distance)	30" to 300" diagonal (1.0 to 12.1m)
Keystone Correction	Vertical: +/- 30°
Brightness (Typical)	2000 ANSI Lumens (High Brightness Mode) / 3000 ANSI Lumens (Low Brightness Mode)
Contrast Ratio (Typical)	400:1
Brightness Uniformity (Typical)	90%
Color Reproduction	Full Color (16.7 million colors)
Speaker	1W Monoaural
Effective Scanning Frequency Range	
Pixel Clock	13.5 to 162 MHz
Horizontal	15 to 92 KHz
Vertical	50 to 85 Hz
Analog RGB Input / Output	
Display Performance	
Native	XGA (1024 x 768)
Resize	Up to UXGA (1600x1200)
Input Terminal	
Video	Mini D-Sub 15pin x 1
Audio	Stereo Mini Jack x 1
Video Input	
Display Performance	
Input Signal	560 TV Line
	NTSC, NTSC4.43, PAL, M-PAL, N-PAL, PAL60, SECAM
	SDTV / HDTV: 480i (525i), 480p (525p), 720p (750p), 1080i (1125i)
Input Terminal	
Video	RCA x 1, S-Video x 1,
	Component Video x 1 (Via Mini D-Sub 15pin - Analog RGB Disabled)
Audio	Stereo Mini Jack x 1 (Analog RGB Disabled)
Control Input / Output	
USB	USB Type B x 1
Operating Temperature	5°C to 35°C (41°F to 95°F)
Power Supply Voltage	100-240V +/- 10%, 50/60Hz AC
Maximum Dimension	276(W) x 193(D) x 81(H) mm
Weight	1.7 kg / 3.8 lbs
Fan Noise	36 dB (Low Brightness Mode)
Accessories	Power cord, Mini D-Sub 15-pin VGA cable, USB cable (Type A-Type B), Remote Control (battery included), Stereo Mini Jack to RCA Audio Adaptor, Password Protect Sticker, User's Manual CD, Soft Carrying Bag


Projection Distance

Diagonal Screen Size (inches)	Wide (cm)	Tele (cm)
30	100	120
40	130	160
60	200	240
80	270	320
100	340	400
150	500	600
200	670	810
300	1010	1210

All products and brand names herein are for identification purpose only and may be the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. All images are simulated in this brochure. Specifications are subject to change without prior notice.

Connector Panel

EMP-732

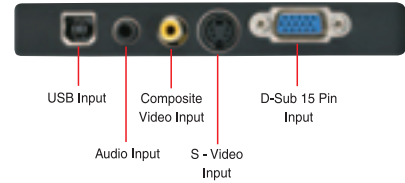

Options & Accessories

ELPLP32 Replacement Lamp
Part No.: V13H010L32

ELPAF08 Air Filter Set
Part No.: V13H134A08

INDIA

Epson India Pvt Ltd
Tel: (91) 080-3051-5000 Fax: (91) 080-3051-5005
www.epson.co.in

INDONESIA

PT Epson Indonesia
Tel: (62) 021-572-3161 Fax: (62) 021-572-4357
www.epson.co.id

MALAYSIA

Epson Trading (M) Sdn Bhd
Tel: (60) 03-5628-8288 Fax: (60) 03-5628-8388
www.epson.com.my

PHILIPPINES

Epson Philippines Corporation
Tel: (63) 02-813-6567 Fax: (63) 02-811-1163
www.epson.com.ph

SINGAPORE

Epson Singapore Pte Ltd
Tel: (65) 6337-7911 Fax: (65) 6334-2716
www.epson.com.sg

THAILAND/INDO-CHINA

Epson (Thailand) Co., Ltd
Tel: (66) 02-670-0680 Fax: (66) 02-670-0688
www.epson.co.th

Dealer's Stamp:



EPSON