

Multimedia Projector

EMP-765 EMP-760

EPSON
EXCEED YOUR VISION



Race through and lighten the workload



Powerful and Compact, Easy to Use

2500 ANSI lm of Brightness in 1.7 kg (3.8 lbs.)

EMP-765 / 760 deliver up to 2500 ANSI lm of brightness and weigh just 1.7 kg (3.8 lbs.)*. With the brightness and lightweight, Epson is widening the gap between EMP-765 / 760 and other projectors.

*EMP-760's weight is 1.7 kg (3.8 lbs.).
EMP-765's weight is 1.8 kg (3.9 lbs.).



"Instant off" Quick Shutdown

Simply press the power-off button and you can unplug power cable immediately after beep sounds.



Single-Foot Release Lever

The well-balanced single-foot has an easily accessible release lever which allows the user to adjust the projection level with just one hand.



Auto Keystone Correction

Auto Keystone Correction automatically detects the projector's vertical angle with $\pm 30^\circ$ and adjusts the vertical keystone distortion instantly.



Security Functions

Power-On protect / User's Logo Protect / Timer Protect / Key Lock

With three password protect functions and key lock functionality, the EMP-765 / 760 have your security concerns covered. So, regardless of theft or mischief, your projector is protected with these innovative security functions.

Intelligent Wireless Connection - EasyMP (EMP-765)

High-speed "Network Screen"

EMP-765 can receive images transmitted from a PC by radio waves for quick projection. Intelligent presentations can be made from anywhere in the room without being restricted by cables. What is more, it is compatible with Mac OS X 10.3 so you can make wireless presentations using Apple's Keynote™ presentation software.



PC-less Presentation

Connect a memory device containing your pictures and movies or presentations to the USB terminal or the PC card slot and start projecting. Not only does EMP-765 free you from your PC and project top-quality still images, it also smoothly projects MPEG2 movie files that will mesmerize your audience.



USB memory



PC card


Specifications

Model	EMP-765	EMP-760
Part Number	V11H198052	V11H199052
Projection System	Epson original 3LCD prism technology	
Projection Method	Front / Rear / Ceiling Mount	
LCD	0.7" with MLA	
Driving Method	Epson Poly-Silicon TFT LCD Active Matrix	
Pixel Number	786,432 (1024 x 768) pixels x 3	
Native Resolution	XGA	
Aspect Ratio	4:3	
Pixel Arrangement	Stripe	
Projection Lens	Manual : Zoom / Focus	
Type	UHE 170W	
F-number	1.58 - 1.76	
Focal Length	23.7 - 28.5mm	
Zoom Ratio	1:1.2	
Lamp	UHE 170W	
Type	UHE 170W	
Life (Typical)	2000 hours (High Brightness Mode) / 3000 hours (Low Brightness Mode)	
Screen Size (Projected Distance)	30" to 300" diagonal (1.0 to 12.1m)	
Keystone Correction	Vertical: +/- 30°	
Brightness (Typical)	2500 ANSI Lumens (High Brightness Mode) / 2000 ANSI Lumens (Low Brightness Mode)	
Contrast Ratio (Typical)	400:1	
Brightness Uniformity (Typical)	90%	
Color Reproduction	Full Color (16.7 million colors)	
Speaker	1W Monoaural	
Effective Scanning Frequency Range	13.5 to 162 MHz	
Pixel Clock	13.5 to 162 MHz	
Horizontal	15 to 92 KHz	
Vertical	50 to 85 Hz	
Analog RGB Input / Output		
Display Performance	XGA (1024 x 768)	
Native	Up to UXGA (1600x1200)	
Resize		
Input Terminal	Mini D-Sub 15pin x 1	
Video	Stereo Mini Jack x 1	
Audio		
Output Terminal		
Audio	Stereo Mini Jack x 1 (Audio Input Disabled)	Not Available
Video Input	560 TV Line	
Display Performance	NTSC, NTSC4.43, PAL, M-PAL, N-PAL, PAL60, SECAM	
Input Signal	SDTV / HDTV: 480i (525i), 480p (525p), 720p(750p), 1080i (1125i)	
Input Terminal	RCA x 1, S-Video x 1	
Video	Component Video x 1 (Via Mini D-Sub 15pin - Analog RGB Disabled)	
Audio	Stereo Mini Jack x 1 (Analog RGB Disabled)	
Control Input / Output		
USB	USB Type A x 1, USB Type B x 1	USB Type B x 1
PCMCIA Card slot	Type I / II x 1	Not Available
Operating Temperature	5°C to 35°C (41°F to 95°F)	
Power Supply Voltage	100-240V +/- 10%, 50/60Hz AC	
Maximum Dimension	276(W) x 193(D) x 81(H) mm	
Weight	1.8 kg / 3.9 lbs	1.7 kg / 3.8 lbs
Fan Noise	35 dB (Low Brightness Mode)	
Accessories	Power cord, Mini D-Sub 15-pin VGA cable, USB cable (Type A-Type B), Remote Control (battery included), Stereo Mini Jack to RCA Audio Adaptor, Password Protect Sticker, User's Manual CD, Soft Carrying Bag	
Bundled Items	EasyMP Software CD, Wireless LAN card	Not Available

Projection Distance

Diagonal Screen Size (inches)	Wide (cm)	Tele (cm)
30	100	120
40	130	160
60	200	240
80	270	320
100	340	400
150	500	600
200	670	810
300	1010	1210

Connector Panel

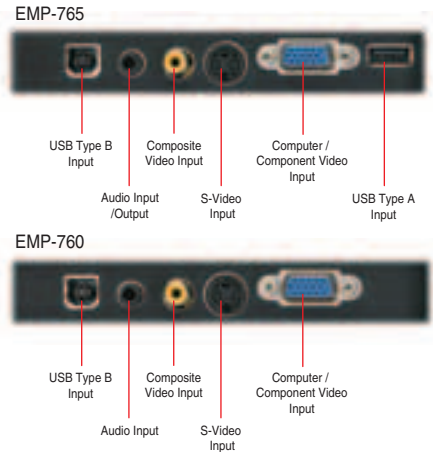

Options & Accessories

ELPLP32 Replacement Lamp
Part No.: V13H010L32

ELPAF08 Air Filter Set
Part No.: V13H134A08

INDIA

Epson India Pvt Ltd
Tel: (91) 080-2532-1266 Fax: (91) 080-2558-1799
www.epson.co.in

INDONESIA

PT Epson Indonesia
Tel: (62) 021-572-3161 Fax: (62) 021-572-4357
www.epson.co.id

MALAYSIA

Epson Trading (M) Sdn Bhd
Tel: (60) 03-5628-8288 Fax: (60) 03-5628-8388
www.epson.com.my

PHILIPPINES

Epson Philippines Corporation
Tel: (63) 02-813-6567 Fax: (63) 02-811-1163
www.epson.com.ph

SINGAPORE

Epson Singapore Pte Ltd
Tel: (65) 6337-7911 Fax: (65) 6334-2716
www.epson.com.sg

THAILAND/INDO-CHINA

Epson (Thailand) Co., Ltd
Tel: (66) 02-670-0680 Fax: (66) 02-670-0688
www.epson.co.th

Dealer's Stamp:

All products and brand names herein are for identification purpose only and may be the trademarks or registered trademarks of their respective owners. Epson disclaims any and all rights in those marks. All images are simulated in this brochure. Specifications are subject to change without prior notice.