
EPSON

EPSON EPL-N3000

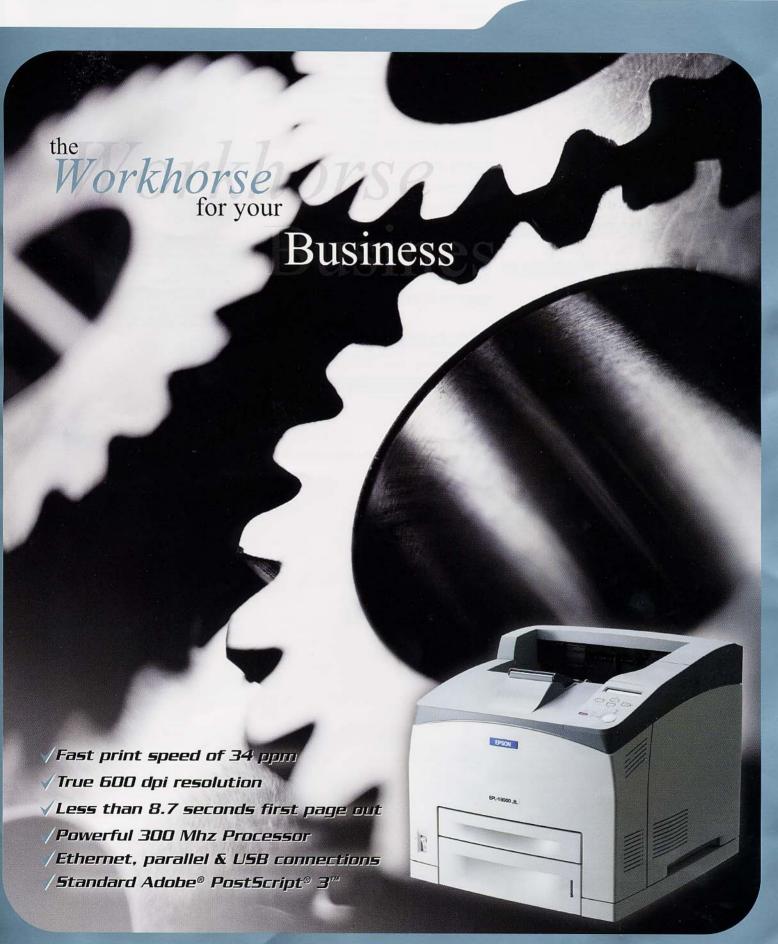

PRINTER TYPE

PRINTING METHOD Electrophotography + Laser

RESOLUTION 600dpi

PRINTING SPEED Mono 34ppm(A4 at 600dpi X 600dpi)

CPU 300MHz

PAPER HANDLING

PAPER FEED METHOD

Paper Cassette

Capacity (Std): Capacity (Max); 1800 sheets

Paper size: A4, A5, B5, LT, HLT, LGL, EXE, GLG, GLT, F4

Mon. C10. DL. C5. C6. IB5 Envelope:

Transparencies: A4, LT Label: A4, LT Paper Eject / Capacity

(Maximum 500 sheets) Face down: (Maximum 70 sheets) Face up:

Paper Thickness

Weight: 60 - 216 g/m²

DUPLEX PRINTING

Option

INTERFACES

STANDARD 10BaseT/100Base Tx Ethernet

IEEE1248 parallel USB 1.1 interface

OPTION 1 slot for Type B interface card

PRINTER CONTROL LANGUAGE

Adobe® Postscript® 3™, PCL6, LJ4, ESC/P2, FX, STANDARD

ESC/Page, IBM Mode(1239X), GL2

MEMORY

64 MB (Expandable to 256MB)

WARM-UP TIME

25 seconds or less (From power on) 17 seconds or less (From low power mode)

FIRST PRINT TIME

Less than 8.7 seconds (Standard MP tray: A4)

ACOUSTIC NOISE

STAND BY: 27dB Ave. **DURING OPERATON:** 53.6dB Ave

DURABILITY

5 years or 1,000,000 pages whichever comes first

MONTHLY PRINT VOLUME

MAXIMUM: 150,000 pages AVERAGE: 10,000 pages

POWER REQUIREMENTS

POWER SUPPLY / FREQUENCY: 220V - 240V ±10%

POWER CONSUMPTION 220V - 240V MAXIMUM: 959 W OPERATION: 538 Wh Ave

STANDBY MODE: 76 Wh Ave. SLEEP MODE: 10 Wh Ave

ENVIRONMENTAL CONDITIONS (OPERATING)

TEMPERATURE: 5 to 35°C 15 to 80% RH HUMIDITY:

DIMENSIONS

WIDTH X DEPTH X HEIGHT: 428 X 468 X 404mm WEIGHT 20.9kg (excluding consumables)

PRINTER DRIVER/UTILITY

PRINTER DRIVER FOR: Microsoft® Windows® 95/98/ME/2000/XP,

Windows NT ™ version 4.0, Mac™ OS 8.6 or later. Mac™ OS X 10.1.2 or later

EPSON STATUS MONITOR 3 FOR: Microsoft® Windows® 95/98/ ME/2000/XP

Windows NT ™ version 4.0 **EPSON FONT MANAGER FOR:** Microsoft® Windows® 95/98/

ME/2000/XP

Windows NT ™ version 4.0 Microsoft® Windows® 95/98/ EPSON BAR CODE FONTS FOR:

ME/2000/XP,

Windows NT ™ version 4.0

EpsonNet WINASSIST FOR: Microsoft® Windows® 95/98/ ME/2000/XP,

Windows NT ™ version 4.0 EpsonNet MACASSIST FOR: Mac™ OS 8.6 or later,

Mac™ OS X 10.1.3 or later EnsonNet DIRECT PRINT FOR: Microsoft® Windows® 95/98/

ME/2000/XP

Windows NT ™ version 4.0

Microsoft® Windows® 95/98/

EpsonNet INTERNET PRINT FOR: ME/2000/XP,

Windows NT ™ version 4.0

EpsonNet NDSP GATEWAY FOR: Microsoft® Windows® 95/98/

ME/2000/XP.

Windows NT ™ version 4.0/ Novell®, Netware® 5.0/5.1/6.0

CONSUMABLES

Lifespan: 17,000 pages*1 C13S051111 Imaging Cartridge Fuser Unit(220V-240V) Lifespan: 200,000 pages*1 C13S053017

OPTIONS

C12C802091 550-Sheet Paper Cassette Unit A4 Hard Disk Drive C12C824061 C12C802111 Stacker Duplex Unit C12C802101





"FPSON ESC/P2 stands for FPSON standard code for printers.
This second generation printer control language supports scalable fonts as

well as enhanced graphics capability. rds compatibility with EPSON's ESC/P, the standard printer language for dot matrix printing EPSON is a registered trademark of SEIKO EPSON

CORPORATION EPSON ESC/P2 is a trademark of SEIKO EPSON CORPORATION. PostScript is a trademark of Adobe Systems Incorporated or its

subsidiaries and may be registered in certain jurisdictions.
All other product names and other company names used herein are
for identification purpose only and may be the trademarks or
registered trademarks of their respective owners. EPSON disclaims any and all rights for those marks. Specifications are subject to change without notice.

Dealer's stamp

EPSON

^{*1} Approximate number of sheets under conditions of continuous printing on A4/letter size paper with 5 percent page coverage.