

# EPSON LQ-590

### PRINTER TYPE

PRINTING METHOD Impact dot matrix  
NUMBER OF PINS IN HEAD 24 pins  
Color Black  
PRINT DIRECTION Bi-direction with logic seeking

### PRINT SPEED

HIGH SPEED DRAFT	10CPI	440 cps
HIGH SPEED DRAFT	12CPI	529 cps
DRAFT	10CPI	330 cps
DRAFT	12CPI	396 cps
DRAFT	15CPI	495 cps
DRAFT	17CPI (Condensed)	559 cps
DRAFT	20CPI (Condensed)	658 cps
LQ	10CPI	110 cps
LQ	12CPI	132 cps
LQ	15CPI	165 cps
LQ	17CPI (Condensed)	187 cps
LQ	20CPI (Condensed)	220 cps

### PRINT CHARACTERISTICS

CHARACTER SETS 14 International character sets  
13 character code tables Italic, PC437, PC850, PC860, PC861, PC863, PC865, Abicomp, BIASCHI, Roman 8, ISO Latin 1, PC856, ISO 8859-15

BIT MAP FONT  
EPSON Draft 10 CPI, 12 CPI, 15 CPI  
EPSON Roman 10 CPI, 12 CPI, 15CPI, Proportional  
EPSON Sans Serif 10 CPI, 12 CPI, 15CPI, Proportional  
EPSON Courier 10 CPI, 12 CPI, 15 CPI  
EPSON Prestige 10 CPI, 12 CPI  
EPSON Script 10 CPI  
EPSON OCR-B 10 CPI  
EPSON Orator 10 CPI  
EPSON Orator-S 10 CPI  
EPSON Script C Proportional

SCALABLE FONT  
EPSON Roman 10.5 pt., 8 pt., 32 pt. (every 2 pt.)  
EPSON Sans Serif 10.5 pt., 8 pt., 32 pt. (every 2 pt.)  
EPSON Roman T 10.5 pt., 8 pt., 32 pt. (every 2 pt.)  
EPSON Sans Serif H 10.5 pt., 8 pt., 32 pt. (every 2 pt.)

BAR CODE  
EAN-13, EAN-8, Interleaved 2 of 5, UPC-A, UPC-E, Code 39, Code 128, POSTNET

### PRINTABLE COLUMNS

(CHARACTERS PER LINE)	
10CPI	80
12CPI	96
15CPI	120
17CPI CONDENSED	137
20CPI CONDENSED	160

### PAPER HANDLING

PAPER PATH Manual Insertion: (Front/Rear insertion)  
Push Tractor: (Front/Rear insertion)  
Pull Tractor: (Front/Rear/Bottom insertion)  
Cut Sheet Feeder: (Front/Rear insertion)

CUT SHEET SIZE (not multi-part)  
LQ-590 Width 100 - 257 mm (3.9 - 10.1 inch)  
Length 100 - 364 mm (3.9 - 14.3 inch)

ENVELOPES No.6, No.10

CONTINUOUS PAPER SIZE  
LQ-590 Width 101.6 - 254 mm (4 - 10 inch)  
Length 101.6 - 558.8 mm (4 - 22 inch)

PAPER THICKNESS  
Cut Sheet  
Single Sheet 0.065 - 0.14 mm (0.0025 - 0.0055 inch)  
Multi part 0.12 - 0.39 mm (0.0047 - 0.015 inch)  
Envelopes 0.16 - 0.52 mm (0.0063 - 0.0205 inch)  
Continuous paper (Single sheet / multi part)  
0.065 - 0.39 mm (0.0025 - 0.015 inch)

Label Base Sheet  
0.07 - 0.09 mm (0.0028 - 0.0035 inch)  
Total Sheet 0.16 - 0.19 mm (0.0063 - 0.0075 inch)

### PAPER FEEDING

Standard Friction (Front/Rear insertion)  
Push Tractor (Front/Rear insertion)  
Pull Tractor (Front/Rear/Bottom insertion)  
Cut Sheet Feeder (Rear insertion)  
Push-Pull Tractor (Front/Rear insertion)

Optional Feeder  
1 original + 4 copies always  
52 dB(A) (ISO7779 pattern)  
4.23mm(1/6 inch) or programmable in increments of 0.0706mm(1/360 inch)

### INPUT DATA BUFFER

128 KByte

### INTERFACE

STANDARD Bi-directional parallel interface  
(IEEE-1284 nibble mode supported), USB (ver 1.1) I/F

OPTION Type B I/F level 2

### RIBBON CARTRIDGE

COLOR Black  
TYPE Fabric  
RIBBON LIFE Approx. 5 million characters

### RELIABILITY

Mean Print Volume Between Failure (MVBFF) : 40 million lines (except print head)  
MTBF : 20000 POH  
PRINT HEAD LIFE : 400 million strokes/ wire

### CONTROL PANEL

6 switches and 10 LEDs

### ENVIRONMENTAL CONDITIONS (OPERATING)

TEMPERATURE 5 - 35°C  
HUMIDITY 10 - 80%

### ELECTRICAL SPECIFICATIONS

RATED VOLTAGE AC 220-240V  
RATED FREQUENCY 50 - 60Hz  
POWER CONSUMPTION Approx. 42W (ISO/IEC10561 Letter pattern)  
(AC220-240V) Energy Star compliant

### DIMENSIONS

WIDTH 414mm  
DEPTH 350mm  
HEIGHT 167.5mm  
WEIGHT Approx. 7.1 kg

### PRINTER DRIVER/ UTILITY


OS Microsoft® Windows® 95/98/2000/Me/XP and Microsoft® Windows® NT® operating system Version 4.0

UTILITY EPSON Status Monitor 3 (Microsoft® Windows® 95/98/2000/Me/XP and Microsoft® Windows® NT® operating system Version 4.0 environment only)

### OPTIONS

RIBBON CARTRIDGE(Black)	C13S015341
HIGH CAPACITY CUT SHEET FEEDER	C12C306362
SINGLE BIN CUT SHEET FEEDER	C12C306372
PULL TRACTOR UNIT	C12C300202
ROLL PAPER HOLDER	C12C311141
FRONT SHEET GUIDE	C12C314001
FRONT PAPER GUIDE	C12C314022
Serial I/F card	C12C323061
32KB Intelligent serial I/F card	C12C323081
32KB IEEE-488 I/F card	C12C323132
Twinax I/F card	C12C323152
EPSONNet 10/100 Base TX Int. Print Server2	C12C323914

### 24-PIN DOT MATRIX PRINTER LQ-590



As an international ENERGY STAR Partner, EPSON has determined that this product meets the international ENERGY STAR Program for energy efficiency.



EPSON ESCP2 stands for EPSON standard code for printers Level 2. This second-generation printer control language supports scalable fonts as well as enhanced graphics capability. It also provides complete backwards compatibility with EPSON's ESCP, the standard printer language for dot matrix printing. EPSON is a registered trademark of SEIKO EPSON CORPORATION. EPSON ESCP2 is a trademark of SEIKO EPSON CORPORATION. Microsoft, Windows and Windows NT are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. All other product names and other company names used herein are for identification purpose only and may be the trademarks or registered trademarks of their respective owners. EPSON disclaims any and all rights in those marks. Print samples shown herein are simulations. Specifications are subject to change without notice.

Just what your business need...

# Improved Efficiency, Proven Reliability



A NEW EPSON Compact 24-pin Dot Matrix Printer





# LQ-590

# EPSON



- **440cps High Speed Draft Mode** • **5-layer Multi-Part Printing**
- **5-way Flexible Loading** • **Easy Network Operation**
- **Ribbon life at 5 million characters** • **128KB input data buffer**

## A Proven Leader

The new Epson LQ-590 is now even faster, more reliable and more efficient! It features a proven durable print head from its previous best-selling predecessor the LQ-580, which boosts speed and productivity by 30%, making it ideal for high traffic, customer service application. Its new compact body makes it the best choice for desktop and countertop.



## Genuine Epson Ribbon Cartridges

Lengthen the life of your printer. A good partner never gives you problems... say no to defects or damages for good! Choose only genuine Quality Epson Ribbon.




## Sharp and Clear

Our 5-Layer Multi-Part printing, prints sharp, clear letter quality text right through to the last copy! That's an original plus four copies!


## Easy Network Operation and Monitoring

This printer is networkable and can be equipped with an optional Type B Level 2 interface card, taking performance and convenience to an entirely new level. The Epson Status Monitor 3 on-screen display also allows you to monitor printer status and control paper options.

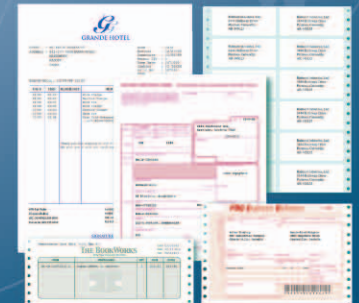

## Economical and Quiet

Featuring Epson 24-pin Eco-Drive print head mechanism, this printer achieves a high level of productivity without running up your electric bill. Its auto power-saving function puts the printer in standby mode giving you additional savings. It is also equipped with the latest sound dampening innovation for whisper-quiet operation.



\*Defects or damages caused by using non-genuine or compatible products are not covered under warranty from Epson.