

HP LaserJet 3015 all-in-one
printer/fax/scanner/copier



HP's most affordable and compact LaserJet all-in-one
Get more than fax with HP LaserJet 3015



HP LaserJet 3015 all-in-one printer/fax/scanner/copier



Compact design

- Small footprint, fits on any workspace.

Fast, professional documents at an affordable price

- 10-second first page out with Instant-on Technology
- Print/copy speed of up to 15 ppm¹ (letter), 14 ppm¹ (A4).
- Crisp, sharp quality with effective output of up to 1200 dpi².

Productive performer

- Handles large print job with memory of up to 32 MB of RAM.
- 240 MHz processor.
- A robust monthly duty cycle of up to 7,000 pages.
- 150-sheet input tray and 10-sheet priority feed.

Powerful faxing and scanning capabilities without a PC

- 33.6 kbps fax modem for fast monochrome faxing.
(3-second per page fax transmission)
- Up to 120 individual speed dials.

Integrated, versatile sheetfed scanner

- With 30-sheet unattended Automatic Document Feeder (ADF) that allows unattended copying, scanning and faxing for large documents.
- Comes with the ReadIRIS Pro 8 OCR (Optical Character Recognition) software for better scanning results.
- Delivers up to 9600 dpi enhanced scanning (600 x 600 dpi optical resolution).
- Colour scanning with 24-bit colour images.



Space-saving design—fits any workspace


Speed dial buttons for quick access to frequently used numbers



Quick fax at a touch

Instant-on Technology

Some competitors' conventional fuser

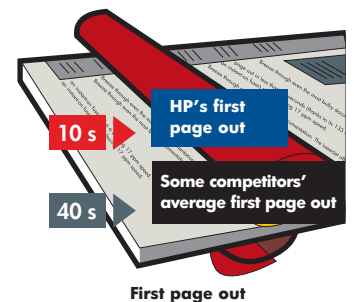

No waiting time!

¹ Approximate figures. Exact speed will vary depending on the system of configuration, software program and document complexity. Print and copy speeds may vary according to the complexity of the document and type of output.

² 600 x 600 dpi with Resolution Enhancement Technology (REt) and FastRes 1200.

HP LaserJet 3015 all-in-one printer/fax/scanner/copier



Easy to use

- The HP LaserJet 3015 all-in-one is simple to setup, use and maintain.
- Optional networking capabilities with HP Jetdirect external print servers.
- The HP LaserJet 3015 all-in-one combines a simplified user interface and the HP Toolbox software for easy configuration, status reports and troubleshooting.

Print

- First page out in as fast as 10 seconds
- Up to 15 ppm¹ (letter)
- Up to 14 ppm¹ (A4)
- Up to 1200 dpi² effective output quality

Fax

- 33.6 kbps fax modem
- 120 speed dials; 110-page memory³

Scan

- Up to 9600 dpi (enhanced)
- Optical 600 x 600 dpi
- Up to 24-bit colour images
- 30-page ADF

Copy

- Up to 15 cpm¹ (letter)
- Up to 14 cpm¹ (A4)
- Automatic collation

¹ Print and copy speeds may vary according to the complexity of the documents and type of output.


² 600 x 600 dpi with REt and FastRes 1200.

³ Based on standard ITU-T Test image #1 at standard resolution. More complicated pages or higher resolution will take longer and use more memory.

30-sheet Automatic Document Feeder (ADF)



Automatic collation



USB and parallel connectivity



Earning the top grade for the 12th consecutive year—PC Magazine

HP's Inkjet, LaserJet and Multifunction printers were awarded the top grade based on four key factors:

- Satisfaction with reliability
- Satisfaction with repair
- Units needing repair in the past 12 months
- Satisfaction with technical support

PC Magazine Reader's Choice Award is a trademark of Ziff Davis Publishing Holdings Inc. Used under license.

HP's reliability

HP LaserJet 3015 all-in-one printer/fax/scanner/copier

Print and copy speed (in pages per minute ¹)	- Up to 15 ppm, letter. - Up to 14 ppm, A4.
Resolution	Print: 1200 dpi effective output quality (600 by 600 dpi using REt and FastRes 1200) Scan: 24-bit, 600 by 600 dpi optical (9600 dpi enhanced).
First page out	10 seconds.
Processor	240 MHz ColdFire v 4e.
Memory (RAM)	Device: 32 MB of RAM.
Duty cycle	7,000 pages per month.
Connectivity	Parallel port (IEEE-1284 level-2 device with an IEEE-1284-B receptacle; set host computer to ECP). USB port (compatible with the USB 2.0 specification). Optional HP Jetdirect external print server.
Language and fonts	HP PCL 6 and 5e, HP PostScript level 2 emulation, 45 scalable TrueType, 35 PostScript fonts, Euro symbol supported.
Paper handling	30-sheet automatic document feeder (ADF), 150-sheet covered input tray, 10-sheet priority input feed, 125-sheet output tray.
Media sizes	150-sheet input tray and priority input feed: 76 by 127 mm to 216 by 356 mm (3 by 5 in to 8.5 by 14 in). ADF: 127 by 127 mm to 215.9 by 381 mm (5 by 5 in to 8.5 by 15 in).
Media weights	150-sheet input tray: 60 to 105 g/m ² (16 to 28 lb). Priority input feed: 60 to 163 g/m ² (16 to 43 lb).
Media types	Paper (plain, preprinted, prepunched, bond, colour, glossy, letterhead, light, heavy, recycled, rough), envelopes, transparencies, labels and cardstock.
Operating systems	Microsoft Windows 98 SE, 2000, Me or XP and Mac OS 9.1, 9.2x or 10.2.x. Print functionality only: UNIX, Linux, OS/2 and Win NT 4.0. Macintosh, UNIX, Linux and additional Windows printer drivers will be available at http://www.hp.com/support/lj3015 after product introduction.
Minimum system requirements	Windows 98 SE: Pentium processor or better, 24 MB RAM; Windows Me: Pentium 150 MHz or better, 32 MB RAM; Windows 2000: Pentium 133 MHz or better, 64 MB RAM; Windows XP: Pentium 300 MHz or better, 128 MB RAM.
Dimensions	Width: 426 mm (16.8 in). Depth: 470 mm (18.5 in). Height: 445 mm (17.5 in).
Weight	With print cartridge :9.45 kg (20.8lb).
Acoustics³ Declared per ISO 9296	Sound power level: Printing: L WAd = 6.2 Bels (A) [56 dB (A)] Sound power level bystander position: Printing: L WAd = 6.2 Bels (A) 49 dB (A)].
Power requirements	WARNING: Power requirements are based on the country/region where the product is sold. Do not convert operating voltages. Doing so might damage the device and void the product warranty. 110-volt models: 110 to 127 volt (+/- 10%); 50/60 Hz (+/- 2 Hz); minimum recommended circuit capacity for typical product: 3.5 amps at 115 volts. 220-volt models: 220 to 240 volt (+/- 10%); 50/60 Hz (+/- 2 Hz); minimum recommended circuit capacity for typical product: 2.0 amps at 230 volts.
Power consumption (average, in watts ⁴)	During printing: 300 watts. Standby: 7 watts. PowerSave mode: 7 watts. Off: 0 watts.
Operating environment	Product plugged into an AC outlet: Temperature: 10 to 32.5° C (59 to 90.5° F). Humidity: 20 to 80 percent (no condensation).
Storage environment	Product unplugged from an AC outlet: Temperature: 20 to 40° C (-4 to 104° F). Humidity: 10 to 95 percent (no condensation).

¹ Approximate figures based on printing with plain paper. Exact speed depends on system configuration, software programs and document complexity.
² Based on standard ITU-T test image #1 at standard resolution. More complicated pages or higher resolution will take longer and use more memory.
³ Values are subject to change. For current information, see www.hp.com/support/lj3015.
⁴ Values are subject to change. For the most current information, see <http://www.hp.com/support/lj3015>. The power sources are not interchangeable.



© 2003 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Printed in Singapore, 2001-1815EEP, 01/2004

Ordering information

Number	Description
Q2669A	HP LaserJet 3015 all-in-one printer/fax/scanner/copier

Accessories	
C6518A	USB, 2-meter A to B cable
8121-0549	USB, 2-foot A to B cable
C2950A	Parallel, 2-meter IEEE 1284-B cable
C2951A	Parallel, 3-meter IEEE 1284-B cable

Print servers	
J3258B	HP Jetdirect 170x external print server: Ethernet (Parallel)
J6035C	HP Jetdirect 175x external print server: Fast Ethernet (USB 1.1)
J3263A	HP Jetdirect 300x external print server: Fast Ethernet (Parallel)
J3265A	HP Jetdirect 500x external print server: Fast Ethernet (Parallel)
J7942A	HP Jetdirect en3700 external print server: Fast Ethernet (Hi-Speed USB 2.0)
J6061A	HP Jetdirect 380x 802.11b wireless print server (USB 1.1)

Supplies	
Q2612A	HP LaserJet ultraprecise print cartridge (prints 2,000 pages, based on 5% coverage)

To order HP supplies and accessories, contact your local HP sales office or nearest HP authorised dealer.

For more information, call your local HP sales office or your nearest HP authorised dealer:

HP customer information centre (for product information)	
Australia	1 323 47
China	+86 21 2898 2255
Hong Kong	+852 800 938 833
India	+9628 123 123 (Del/Mum/Blr) +1 600 444 999 (other cities)
Indonesia	+0800 1 111 222
Korea	+080 703 0700
Malaysia	+1 800 88 4848
New Zealand	+0800 733 547
Philippines	+1 800 1 331 4488
Singapore	+1 800 278 8100
Taiwan	+0800 236 686
Thailand	+662 353 9000
Vietnam	+848 823 6215

For the following countries, please fax your queries to:
+65 6 275 6707

• Bangladesh • Brunei • Cambodia • Pakistan • Sri Lanka

HP customer care centre (for post-sales service)	
Australia	+61 3 8877 8000
China	+86 10 6564 5959
Hong Kong	+852 800 96 7729
India	+1 600 1 122 67
Indonesia	+62 21 350 3408
Korea	+82 2 3270 0700
Malaysia	+60 3 2695 2566
New Zealand	+64 9 356 6640
Philippines	+63 2 867 3551
Singapore	+65 6 272 5300
Taiwan	+886 2 8722 8000
Thailand	+662 353 9000
Vietnam	+848 823 4530

Dealer's stamp

HP customer care

One-year limited warranty*; optional HP Care Pack; 24-hour electronic support available free at www.hp.com/support

** For specific warranty details, please check with your local country reseller.

For more information, visit us at

<http://www.hp.com/apac/homeandoffice>

