
HP LaserJet 3020/3030* all-in-one printer/fax*/scanner/copier



Fast and professional performance with space-saving flatbed design



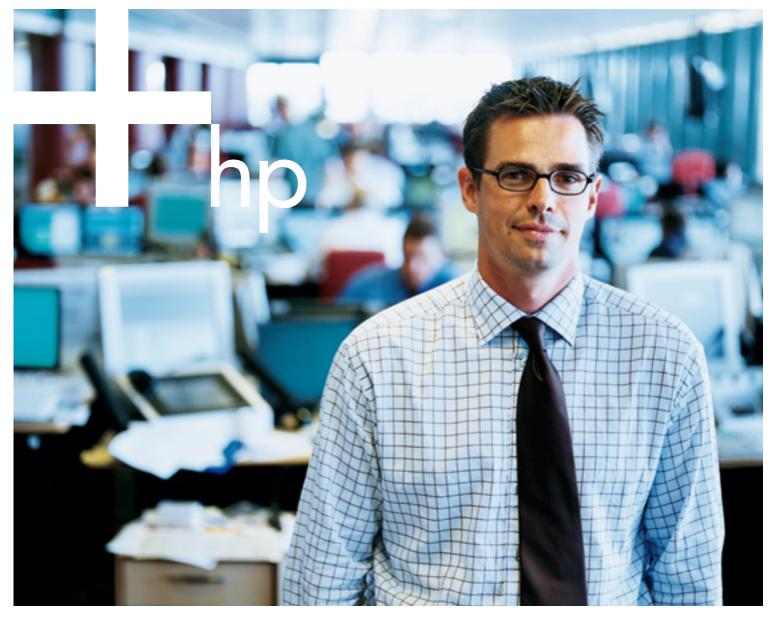

HP LaserJet 3020/3030* all-in-one printer/fax*/scanner/copier



Compact design

• Compact flatbed design for any office space.

Fast professional and affordable quality

- 10-second first page out with Instant-on Technology.
- Fast print/copy speed of up to 15 ppm¹ (letter), 14 ppm¹ (A4).
- Professional quality documents with effective output of up to 1200 dpi².

Productive performer

- Handles complex print jobs with up to 32 MB of RAM.
- 240 MHz processor.
- A robust monthly duty cycle of up to 7,000 pages.
- 150-sheet input tray and 10-sheet priority feed.

Integrated, versatile sheetfed scanner

- Allows scanning and copying of documents and books.
- 50-sheet Automatic Document Feeder (ADF) that allows unattended copying, scanning and faxing* for large documents.
- Additional 2MB fax memory storing up to 110 pages³ of fax documents.
- High quality 600 x 600 dpi images (up to maximum 9600 dpi with enhanced scanning technology).
- Colour scanning with 24-bit colour images.
- ReadIRIS Pro 8 OCR (Optical Character Recognition) software for better scanning results.



Space-saving design


50-sheet Automatic
Document Feeder (ADF)



Automatic collation

Instant-on Technology

Some competitors' conventional fuser



First page out

No waiting time!

Approximate figures. Exact speed will vary depending on the system of configuration, software program and document complexity. Print and copy speeds may vary according to the complexity of the document and type of output.

⁶⁰⁰ x 600 dpi with Resolution Enhancement Technology (REt) and FastRes 1200.

Based on standard ITU-T test image #1 at standard resolution. More complicated pages or higher resolution will take longer and use more memory.

^{*} Faxing capability applicable only for HP LaserJet 3030 all-in-one.

HP LaserJet 3020/3030* all-in-one printer/fax*/scanner/copier



HP reliability

• HP's proven quality, reliability and ease of use leaves you free to focus on your business and leave the equipment and quality worries to us.

Print

- First page out in as fast as 10 seconds.
- Up to 15 ppm¹ (letter).
- Up to 14 ppm¹ (A4).
- Up to 1200 dpi² effective output quality.

Fax*

- 33.6 kbps fax modem.
- 120 speed dials; 110-page memory³.

Scan

- 9600 dpi (enhanced).
- Optical 600 x 600 dpi.
- Up to 24-bit colour images.
- 50-page Automatic Document Feeder (ADF).
- One-touch scan to email or folder.

Copy

- Up to 15 cpm¹ (letter).
- Up to 14 cpm¹ (A4).
- Automatic collation.



Colour scanning



Earning the top grade for the 12th consecutive year—PC Magazine

HP's Inkjet, LaserJet and Multifunction printers were awarded the top grade based on four key factors:

- Satisfaction with reliability
- Satisfaction with repair
- •Units needing repair in the past 12 months
- Satisfaction with technical support

HP's reliability

PC Magazine Reader's Choice Award is a trademark of Ziff Davis Publishing Holdings Inc. Used under license.

- Print and copy speeds may vary according to the complexity of the documents and type of output.
- 600 x 600 dpi with REt and FastRes 1200.
- Based on standard ITU-T Test image #1 at standard resolution. More complicated pages or higher resolution will take longer and use more memory.
- * Faxing capability applicable only for HP LaserJet 3030 all-in-one.

HP LaserJet 3020/3030* all-in-one printer/fax*/scanner/copier

' '	· '
Print speed (in pages per minute¹)	- Up to 15 ppm, letter. - Up to 14 ppm, A4.
Resolution	Print: 1200 dpi effective output quality (600 by 600 dpi using REt and FastRes 1200) Scan: 24-bit, 600 by 600 dpi optical (9600 dpi enhanced).
First page out	10 seconds.
Processor	240 MHz ColdFire v 4e.
Memory (RAM)	32 MB of RAM.
Duty cycle, monthly	7,000 pages per month.
Connectivity	Parallel port (IEEE-1284 level-2 device with an IEEE-1284-B receptacle; set host computer to ECP). USB port (compatible with the USB 2.0 specification). Optional HP Jetdirect external print server.
Language and fonts	HP PCL 6 and HP PCL 5e, HP PostScript level 2 emulation 45 scalable TrueType and 35 PostScript fonts.
Paper handling	50-sheet automatic document feeder, 150-sheet covered input tray, 10-sheet priority input feed, 125-sheet output tray.
Media sizes	Input trays: 76 by 127 mm to 216 by 356 mm (3 by 5 in to 8.5 by 14 in). ADF: 127 by 127 to 215.9 by 381 mm (5 by 5 to 8.5 by 15 in).
Media weights	Input trays: 60 to 163 g/m² (16 to 43 lb). ADF: 60 to 90 g/m² (16 to 24 lb).
Media types	Paper (plain, preprinted, prepunched, bond, colour, glossy, letterhead, light, heavy, recycled, rough), envelopes, transparencies, labels, cardstock.
Client operating systems	Windows 98 SE, Me, 2000 and XP; Mac OS 9.1, 9.2x and Mac OSX v10.2.x. Print functionality only: Win NT 4.0, DOS, UNIX, Linux and OS/2. UNIX, Linux and additional Windows printer drivers will be available at http://www.hp.com/support/lj3020 and http://www.hp.com/support.lj3030 after product introduction.
Minimum system requirements	Windows 98 SE: Pentium processor or better, 24 MB; RAM Windows Me: Pentium 150 MHz or better, 32 MB RAM; Windows NT 4.0: Pentium or better, 32 MB RAM; Windows 2000: Pentium 133 MHz or better, 64 MB RAM; Windows XP: Pentium 300 MHz or better, 128 MB RAM; Mac 9.1: Mac OS-based Apple computer with a PowerPC microprocessor, at least 32 MB of RAM with virtual memory set to 64 MB; Mac 9.2.x: Power Mac G4 or Macintosh Server G4 (all models), Power Macintosh G3 or Macintosh Server G3 (all models), iMac (all models), iBook (all models), Powerbook (all models later than the original PowerBook G3), at least 32 MB RAM with virtual memory set to 64 MB; Mac OSX v 10.2.x: Power Mac G5 (all models), Power Mac G4 or Macintosh Server G4 (all models), Power Macintosh Server G3 (all models), iMac (all models), iBook (all models), Powerbook (all models) later than the original PowerBook G3), 128 MB RAM.
Dimensions	Width: 497 mm (19.6 in). Depth: 399 mm (15.8 in). Height: 378 mm (14.9 in).
Weight	With print cartridge :12 kg (26.4lb)
Acoustics ² Declared per ISO 9296	Active LpAm56 dB (A) LpAm48 dB (A) LWAd6.2 Bels (A) ldle LpAmN/A dB (A) LpAmN/A dB (A) LWAdN/A Bels (inaudible) (A) (inaudible)
Power requirements	WARNING: Power requirements are based on the country/region where the product is sold. Do not convert operating voltages. Doing so might damage the device and void the product warranty. 110 volt models: 110 to 127 volt (+/- 10%); 50 to 60 Hz (+/- 2 Hz); minimum recommended circuit capacity for typical product: 4.5 amps 220 volt models: 220 to 240 volt (+/-10%); 50 to 60 Hz (+/- 2 Hz); minimum recommended circuit capacity fr typical product: 2.3 amps.
Power consumption	110 volt models 220 volts models
	During printing 300 W (average) 300 W (average) During standby 14 W (average) 14 W (average) Power Save mode 13 W (average) 13 W (average) Off mode >1 W (average) >1 W (average)
Operating environment	During standby 14 W (average) 14 W (average) Power Save mode 13 W (average) 13 W (average)

- Approximate figures based on printing with plain paper. Exact speed depends on system configuration, software program, and
- Values are subject to change. For current information see http://www.hp.com/support/lj3020 or http://www.hp.com/support/lj3030
- Based on standard ITU-T test image #1 at standard resolution. More complicated pages or higher resolution will take longer and
- Faxing capability applicable only for HP LaserJet 3030 all-in-one.





© 2003 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Ordering information

Number	Description
Q2665A	HP LaserJet 3020 all-in-one
	printer/scanner/copier
Q2666A	HP LaserJet 3030 all-in-one
	printer/fax/scanner/copier

Accessories C6518A

USB, 2-meter A to B cable USB, 2-foot A to B cable 8121-0549

Parallel, 2-meter IEEE 1284-B cable Parallel, 3-meter IEEE 1284-B cable

Print servers J3258B

HP Jetdirect 170x external print server: Ethernet J6035C HP Jetdirect 175x external print server: Fast Ethernet (USB 1.1)

J3263A HP Jetdirect 300x external print server: Fast

Ethernet (Parallel) HP Jetdirect 500x external print server: Fast Ethernet 13265A (Parallel)

J7942A

HP Jetdirect en3700 external print server: Fast Ethernet (Hi-Speed USB 2.0) J6061A HP Jetdirect 380x 802.11b wireless print server

HP LaserJet ultraprecise print catridge (prints 2,000 pages, based on 5% coverage)

To order HP supplies and accessories, contact your local HP sales office or nearest HP authorised dealer.

For more information, call your local HP sales office or your nearest HP authorised dealer:

HP customer information centre (for product information) Australia 132347

Australia China +86 21 2898 2255

+852 800 938 833 +9628 123 123 (Del/Mum/Blr) Hong Kong India +1600 444 999 (other cities) +0800 1111 222 Indonesia

+0800 1111 222 +080 703 0700 +1800 88 4848 +0800 733 547 +1800 1331 4488 New Zealand Philippines +1800 278 8100 Singapore +0800 236 686 +662 353 9000 +848 823 6215

For the following countries, please fax your queries to: +65 6 275 6707 • Bangladesh • Brunei • Cambodia • Pakistan • Sri Lanka

HP customer care centre (for post-sales service) +61 3 8877 8000 +86 10 6564 5959 China +852 800 96 7729 +1600 112267 Hong Kong India +1600 11226/ +62 21 350 3408 +82 2 3270 0700 +60 3 2695 2566 +64 9 356 6640 Indonesia Korea Malaysia New Zealand +63 2 867 3551 +65 6 272 5300 Philippines Singapore +886 2 8722 8000 +662 353 9000 Taiwan Thailand

Dealer's stamp

Vietnam

One-year limited warranty**; optional HP Care Pack; 24-hour electronic support available free at www.hp.com/support
** For specific warranty details, please check with your local country reseller.
For more information, visit us at http://www.hp.com/apac/homeandoffice

+848 823 4530

