


Overview

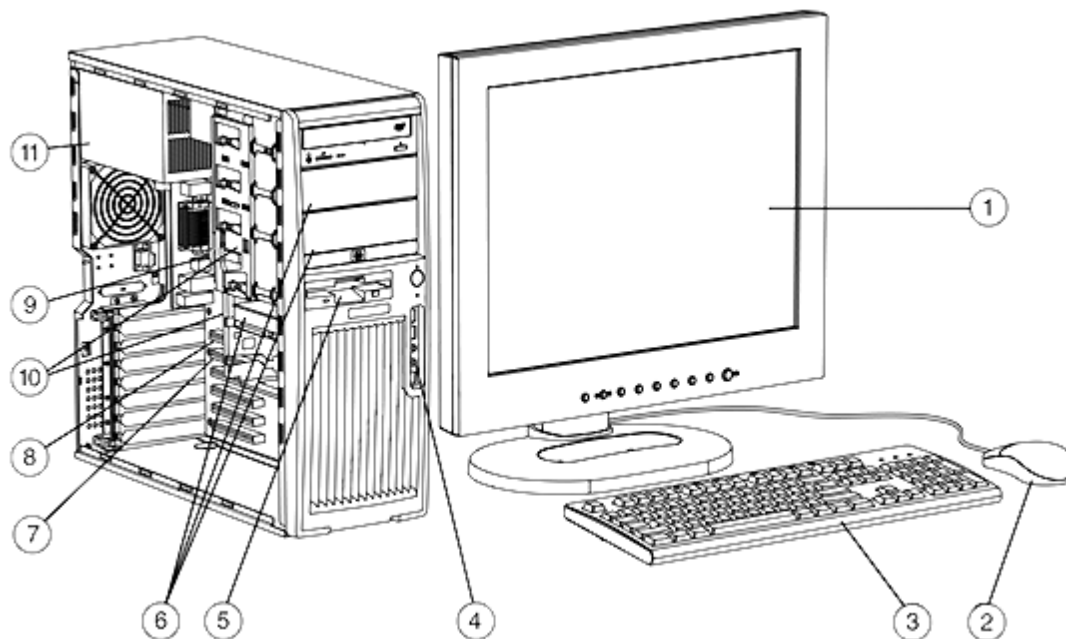

1. Monitor (sold separately)
2. 2-Button Scroll Mouse
3. 2004 Standard Keyboard
4. Front IO: 2 USB 2.0, IEEE-1394 (requires optional PCI card to enable), headphone and microphone
5. One 3.5" external bay for optional diskette drive or other 3.5" device
6. Three 5.25" external bays (3rd external is not full depth), and two 3.5" internal bays
7. 3 PCI slots, 1 PCI Express x1 slot, 1 PCI Express x8 slot (with x4 functionality)
8. 1 PCI Express x16 Graphics slot
9. Rear IO: 6 USB 2.0, 1 standard serial port, 1 optional serial port, 1 parallel port, PS/2 keyboard, PS/2 mouse, RJ-45, audio in, audio out, mic in
10. Intel® Pentium® 4 processor with Hyper-Threading Technology and EM64T capability
11. 460 watt (continuous) power supply

At A Glance

Overview

- Choice of operating systems:
Microsoft Windows XP Professional (32-bit),
Microsoft Windows XP Professional x64 Edition,
Red Hat Enterprise WS 3 available 2H 2005,
HP Installer Kit for Linux (see <http://www.hp.com/workstations/software/linux/> for details) available 2H 2005
- Intel Pentium 4 processor with Extended Memory 64 Technology (EM64T) and Hyper-Threading Technology
- Intel Pentium D processor with Extended Memory 64 Technology (EM64T)
- Intel 955X Express chipset
- Integrated HP Gbit LAN by Broadcom
- 1066 or 800 MHz processor front side bus support
- Convertible and tool-less minitower chassis
- 3 PCI Express slots/3 PCI slots
- Dual channel DDR-2 memory at 533 or 667 MHz
- Four channel SATA Controller with RAID 0, 1, 10, or 5
- Realtek integrated high definition audio with internal speaker
- Pre-loaded Manageability tools
- Protected by HP Services, including a 3-3-3 standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.

Standard Features - Custom Components

Processor and Speed – One of the following

All processors feature **Extended Memory 64 Technology**. All Pentium 4 processors feature **Hyper-Threading Technology**

Intel Pentium 4 processor 521 supporting Hyper-Threading Technology (2.8 GHz/1 MB, 800 FSB, Single Core)

Intel Pentium 4 processor 531 supporting Hyper-Threading Technology (3.0 GHz/1 MB, 800 FSB, Single Core)

Intel Pentium 4 processor 640 supporting Hyper-Threading Technology (3.2 GHz/2 MB, 800 FSB, Single Core)

Intel Pentium 4 processor 650 supporting Hyper-Threading Technology (3.4 GHz/2 MB, 800 FSB, Single Core)

Intel Pentium 4 processor 660 supporting Hyper-Threading Technology (3.6 GHz/2 MB, 800 FSB, Single Core)

Intel Pentium 4 processor 670 supporting Hyper-Threading Technology (3.8 GHz/2 MB, 800 FSB, Single Core)

Intel Pentium D processor 840 (3.2 GHz/1 MB, 800 FSB, Dual Core)

NOTE: Hyper-Threading (HT) Technology requires a computer system with an Intel Pentium processor supporting HT Technology and an HT Technology enabled chipset, BIOS, and operating system. Performance will vary depending on the specific hardware and software you use. See <http://www.intel.com/info/hyperthreading/> for more information including details on which processors support HT Technology.

Operating System – One of the following

Microsoft Windows XP Professional (32-bit)

Microsoft Windows XP Professional x64 Edition

Red Hat Enterprise Linux Workstation 3 Update 5 (64-bit available as pre-load, 32 & 64-bit available as an After Market Option). Available 2H 2005.

HP Installer CD for Red Hat Linux WS 3 and WS 4 Box Set (32-bit and 64-bit)

See <http://www.hp.com/workstations/software/linux/>

Click on "Hardware support matrix" under "Related links" for details. Available 2H 2005.

NOTE: Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix (http://www.hp.com/support/linux_hardware_matrix) for details, and to the Linux User Manual (http://www.hp.com/support/linux_user_manual) for tips on user-enablement of the IEEE 1394 Card.

Standard Features - Custom Components

1st Hard Disk Drive – One of the following

Serial ATA Drives

	Windows XP	Red Hat Linux
74 GB SATA 1.5 Gb/s 10K rpm drive	32-Bit, 64-Bit	WS3
80 GB SATA 3.0 Gb/s 7200 rpm drive	32-Bit, 64-Bit	WS3
160 GB SATA 3.0 Gb/s 7200 rpm drive	32-Bit, 64-Bit	WS3
160 GB SATA 3.0 Gb/s 7200 rpm drive with Native Command Queuing (available 2H 2005)	32-Bit, 64-Bit	WS3
250 GB SATA 3.0 Gb/s 7200 rpm drive (available 2H 2005)	32-Bit, 64-Bit	WS3
500 GB SATA 3.0 Gb/s 7200 rpm drive with Native Command Queuing (available 2H 2005)	32-Bit, 64-Bit	WS3

SCSI Drives

73 GB Ultra320 SCSI 10K rpm drive	32-Bit, 64-Bit	WS3
146 GB Ultra320 SCSI 10K rpm drive	32-Bit, 64-Bit	WS3
300 GB Ultra320 SCSI 10K rpm drive	32-Bit, 64-Bit	WS3
36 GB Ultra320 SCSI 15K rpm drive	32-Bit, 64-Bit	WS3
73 GB Ultra320 SCSI 15K rpm drive	32-Bit, 64-Bit	WS3

2nd Hard Disk Drive – One of the following

	Windows XP	Red Hat Linux
2nd Hard Drive, 80 GB SATA 3.0 Gb/s 7200 rpm drive	32-Bit, 64-Bit	WS3
2nd Hard Drive, 160 GB SATA 3.0 Gb/s 7200 rpm drive	32-Bit, 64-Bit	WS3
2nd Hard Drive, 160 GB SATA 3.0 Gb/s 7200 rpm drive with Native Command Queuing (available 2H 2005)	32-Bit, 64-Bit	WS3
2nd Hard Drive, 250 GB SATA 3.0 Gb/s 7200 rpm drive (available 2H 2005)	32-Bit, 64-Bit	WS3
2nd Hard Drive, 500 GB SATA 3.0 Gb/s 7200 rpm drive with Native Command Queuing (available 2H 2005)	32-Bit, 64-Bit	WS3
2nd Hard Drive, 74 GB SATA 1.5 Gb/s 10K rpm drive	32-Bit, 64-Bit	WS3
2nd Hard Drive, 73 GB Ultra320 SCSI 10K rpm drive	32-Bit, 64-Bit	WS3
2nd Hard Drive, 146 GB Ultra320 SCSI 10K rpm drive	32-Bit, 64-Bit	WS3
2nd Hard Drive, 300 GB Ultra320 SCSI 10K rpm drive	32-Bit, 64-Bit	WS3
2nd Hard Drive, 36 GB Ultra320 SCSI 15K rpm drive	32-Bit, 64-Bit	WS3
2nd Hard Drive, 73 GB Ultra320 SCSI 15K rpm drive	32-Bit, 64-Bit	WS3

Standard Features - Custom Components

3rd Hard Disk Drive - One of the following		Windows XP	Red Hat Linux
3rd Hard Drive, 80 GB SATA 3.0 Gb/s 7200 rpm drive		32-Bit	WS3
3rd Hard Drive, 160 GB SATA 3.0 Gb/s 7200 rpm drive		32-Bit	WS3
3rd Hard Drive, 160 GB SATA 3.0 Gb/s 7200 rpm drive with Native Command Queuing (available 2H 2005)		32-Bit	WS3
3rd Hard Drive, 250 GB SATA 3.0 Gb/s 7200 rpm drive (available 2H 2005)		32-Bit	WS3
3rd Hard Drive, 500 GB SATA 3.0 Gb/s 7200 rpm drive with Native Command Queuing (available 2H 2005)		32-Bit	WS3
3rd Hard Drive, 74 GB SATA 1.5 Gb/s 10K rpm drive		32-Bit	WS3
3rd Hard Drive, 73 GB Ultra320 SCSI 10K rpm drive (available 2H 2005)		32-Bit, 64-Bit	WS3
3rd Hard Drive, 146 GB Ultra320 SCSI 10K rpm drive (available 2H 2005)		32-Bit, 64-Bit	WS3
3rd Hard Drive, 300 GB Ultra320 SCSI 10K rpm drive (available 2H 2005)		32-Bit, 64-Bit	WS3
3rd Hard Drive, 36 GB Ultra320 SCSI 15K rpm drive (available 2H 2005)		32-Bit, 64-Bit	WS3
3rd Hard Drive, 73 GB Ultra320 SCSI 15K rpm drive (available 2H 2005)		32-Bit, 64-Bit	WS3

Drive controllers		Windows XP	Red Hat Linux
Integrated 4 channel Serial ATA controller with RAID 0, 1, 10, 5 functionality		32-Bit	WS3
Optional SCSI controllers (required with SCSI HDDs)		32-Bit	WS3

Factory Integrated RAID		Windows XP	Red Hat Linux
RAID 0 Configuration - Striped Array (SATA RAID 0, 1 available as factory integrated option in 2H 2005, optional SCSI RAID card 0,1 available at launch)		32-Bit	
RAID 1 Configuration - (SATA RAID 0, 1 available as factory integrated option in 2H 2005, optional SCSI RAID card 0,1 available at launch)		32-Bit	
NOTE: Requires 2 identical hard drives (speeds, capacity, interface)			

Standard Features - Custom Components

Memory – One of the following		Windows XP	Red Hat Linux
	ECC RAM		
	512 MB DDR-2 PC2-4300 (533 MHz) ECC (2 x 256 MB)	32-Bit, 64-Bit	WS3
	512 MB DDR-2 PC2-5300 (667 MHz) ECC (2 x 256 MB)	32-Bit, 64-Bit	WS3
	1 GB DDR-2 PC2-4300 (533 MHz) ECC (2 x 512 MB)	32-Bit, 64-Bit	WS3
	1 GB DDR-2 PC2-5300 (667 MHz) ECC (2 x 512 MB)	32-Bit, 64-Bit	WS3
	1.5 GB DDR-2 PC2-4300 (533 MHz) ECC (2 x 256 MB + 2 x 512 MB)	32-Bit, 64-Bit	WS3
	2 GB DDR-2 PC2-4300 (533 MHz) ECC (4 x 512 MB)	32-Bit, 64-Bit	WS3
	2 GB DDR-2 PC2-5300 (667 MHz) ECC (2 x 1 GB)	32-Bit, 64-Bit	WS3
	4 GB DDR-2 PC2-5300 (667 MHz) ECC (4 x 1 GB)	32-Bit, 64-Bit	WS3
	Non-ECC RAM		
	256 MB DDR-2 PC2-4300 (533 MHz) non-ECC (1 x 256 MB)	32-Bit, 64-Bit	WS3
	512 MB DDR-2 PC2-4300 (533 MHz) non-ECC (2 x 256 MB)	32-Bit, 64-Bit	WS3
	1 GB DDR-2 PC2-4300 (533 MHz) non-ECC (4 x 256 MB)	32-Bit, 64-Bit	WS3

NOTE: Do not mix ECC and non-ECC memory. The system will not boot if ECC and non-ECC DIMMs are mixed. Only unbuffered DDR2 DIMMs are supported. All DIMMs must be either x8 or x16 width.

Removable Storage		Windows XP	Red Hat Linux
	1.44-MB Diskette Drive	32-Bit, 64-Bit	WS3
	48X CD-ROM Drive	32-Bit, 64-Bit	WS3
	48X/32X/48X CD-RW Drive	32-Bit, 64-Bit	WS3
	16X/40X DVD-ROM with +R Read	32-Bit, 64-Bit	WS3
	48X/32X/48X/16X Combo CD-RW/DVD-ROM Drive	32-Bit, 64-Bit	WS3
	16X DVD+/-RW, Dual-Layer, LightScribe	32-Bit	WS3*
	*NOTE: LightScribe software works with Windows only.		

2nd Removable Storage		Windows XP	Red Hat Linux
	48X/32X/48X CD-RW Drive	32-Bit, 64-Bit	WS3
	16X/40X DVD-ROM with +R Read	32-Bit, 64-Bit	WS3
	48X/32X/48X/16X Combo CD-RW/DVD-ROM Drive	32-Bit, 64-Bit	WS3
	16X DVD+/-RW, Dual-Layer, LightScribe	32-Bit	WS3*
	*NOTE: LightScribe software works with Windows only.		

Keyboard – One of the following		Windows XP	Red Hat Linux
	PS/2 Standard Keyboard	32-Bit, 64-Bit	WS3
	USB Standard Keyboard	32-Bit, 64-Bit	WS3

Standard Features - Custom Components

Mouse – One of the following	PS/2 2-Button Scroll Mouse	Windows XP 32-Bit, 64-Bit	Red Hat Linux WS3
	USB 2-Button Optical Scroll Mouse	32-Bit, 64-Bit	WS3
	USB 3-Button Optical Mouse	32-Bit, 64-Bit	WS3
Audio	Integrated High Definition audio with internal speaker	32-Bit	Red Hat Linux
	Sound Blaster Audigy x-Fi PCI sound card (available July 2005)	32-Bit	
NIC	Broadcom BCM5751 NetXtreme™ Gigabit Ethernet Controller for Workstations (PCI Express)	Windows XP 32-Bit, 64-Bit	Red Hat Linux WS3
Graphics	ATI Entry 2D PCI Express (64 MB)	32-Bit	Red Hat Linux
	NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI)	32-Bit, 64-Bit	WS3
	NVIDIA Quadro NVS 280 PCI Express (64 MB, VGA & DVI)	32-Bit, 64-Bit	WS3
	ATI FireGL V3100 PCI Express (128 MB)	32-Bit	
	NVIDIA Quadro FX 540 PCI Express (128 MB)	32-Bit, 64-Bit	WS3
	NVIDIA Quadro FX 1400 PCI Express (128 MB)	32-Bit	
	ATI FireGL V5100 PCI Express (128 MB)	32-Bit	
	NVIDIA Quadro FX3400 PCI Express (256 MB)	32-Bit, 64-Bit	WS3
Miscellaneous	NVIDIA Quadro FX3450 PCI Express (256 MB) (available 2H 2005)	32-Bit, 64-Bit	WS3
	Solenoid lock and hood sensor	Windows XP 32-Bit, 64-Bit	Red Hat Linux WS3
	IEEE 1394a PCI Card	32-Bit	
	Configure minitower in desktop orientation	32-Bit, 64-Bit	WS3
	Energy Star Settings	32-Bit	

Standard Features - Custom Components

Software	Windows XP	Red Hat Linux
Microsoft Windows XP Professional*	32-Bit	
OR Microsoft Windows XP Professional x64 Edition*	64-Bit	
Alert Standard Format specification*	32-Bit, 64-Bit	
Symantec Norton AntiVirus 2005 (optional preinstall, Microsoft Windows XP Professional only)*	32-Bit	
Computer Associates eTrust 64-bit AntiVirus available July 2005 (optional preinstall, Microsoft Windows XP Professional x64 Edition only)*	64-Bit	
HP Performance Tuning Framework*	32-Bit, 64-Bit	
Altiris Recovery* (optional download)	32-Bit, 64-Bit	
HP ProtectTools Security Manager* (optional download)	32-Bit, 64-Bit	
HP Client Manager Software v6.0* (optional download)	32-Bit, 64-Bit	
Microsoft Office 2003 Small Business Edition (optional preinstall - Microsoft Windows XP Professional only)	32-Bit	
Microsoft Office 2003 Basic (optional preinstall - Microsoft Windows XP Professional only)	32-Bit	
Microsoft Office 2003 Professional	32-Bit, 64-Bit	
OR Red Hat Enterprise Linux Workstation 3 Update 5 (64-bit only)		WS3
OR HP Installer Kit for Linux (includes drivers for both 32-bit & 64-bit OS versions on xw8200, xw6200, xw4200, xw4300)		WS3
CD/DVD software dependent on optical drive choices	32-Bit	

* **NOTE:** Not available with Linux Operating System.

Standard Features - Specs

Operating System (choice)	Microsoft Windows XP Professional (32-bit) Microsoft Windows XP Professional x64 Edition Red Hat Enterprise Linux Workstation 3 64-bit version Update 5. Both 32- and 64-bit versions available as aftermarket option -(available 2H 2005). HP Installer Kit for Linux (includes drivers for both 32-bit & 64-bit OS versions) -(available 2H 2005).
Form factor	Minitower
Color	Carbonite/Alloy metallic
Convertibility	Yes. 5.25" drives rotate for Minitower or Desktop orientation.
System Board Form Factor	ATX (9.6 x 12 in)
Processor	Single Intel Pentium 4 processors with Hyper-Threading Technology and Pentium D processors (available in 2H 2005).
CPU Bus Speed Supported	1066 and 800 MHz FSB
Standard L2 Cache	1 or 2 MB L2 cache, depending on specific processor
Chipset	Intel 955X North bridge/ICH7R South bridge
Memory Expansion Slots	4 DIMMs
Memory Type Supported	DDR-2 (ECC and non-ECC)
Memory Speed Supported	DDR-2 SDRAM PC2-4300 (533 MHz) ECC DDR-2 SDRAM PC2-5300 (667 MHz) ECC DDR-2 SDRAM PC2-4300 (533 MHz) non-ECC
Maximum Memory	8 GB (4 DIMM slots)
Network controller	Integrated Broadcom 5752 10/100/1000 for HP (PCI Express interface)
Audio	Integrated High Definition digital audio with stereo microphone
PCI slots	3 PCI slots (full-height, full-length) 1 PCI Express x8 slot (x4 functionality) 1 PCI Express x1 slot 1 PCI Express x16 graphics slot
AGP slot	None
Bays	Total Bays = 6
Internal Bays	<ul style="list-style-type: none"> Two 3.5 inch SATA Hard Drive
External Bays	<ul style="list-style-type: none"> Three 5.25 inch bays One 3.5 inch bay for optional floppy drive
Parallel Port	1
Serial Port	1 standard, 2nd is optional
Front I/O	2 USB 2.0, IEEE-1394 (requires optional PCI card to function), headphone and microphone. NOTE: Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix (http://www.hp.com/support/linux_hardware_matrix) for details, and to the Linux User Manual (http://www.hp.com/support/linux_user_manual) for tips on user-enablement of the IEEE 1394 Card.
Rear I/O	6 USB 2.0, 1 standard serial port, 1 optional serial port, parallel port, PS/2 keyboard, PS/2 mouse, RJ-45, audio in, audio out, mic in (audio/mic ports can be made function autosensing and interchangeably retaskable by downloading a driver)
USB Keyboard	Optional
USB Mouse	Optional
PS/2 Keyboard	1
PS/2 Mouse	1
Chassis Dimensions (H x W x D)	17.7 x 6.6 x 17.9 in (45.0 x 16.8 x 45.6 cm) 6.6 x 17.7 x 17.9 in (16.8 x 45.0 x 45.6 cm)
Weight	Typical configuration – 35 lb (15.88 kg)

Standard Features - Specs

Shipping weight	Typical configuration – 44 lb (19.96 kg)	
Temperature	Operating	40° to 95°F (5° to 35°C)
	Non-operating	-40° to 140°F (-40° to 60°C)
Humidity	Operating	8% to 85%
	Non-operating	8% to 90%
Maximum Altitude (nonpressurized)	Operating	10,000 ft (3,000 m)
	Non-operating	30,000 ft (9,100 m)
Power Supply	460 watts (continuous) Auto-ranging	
Interfaces Supported	1 SATA 3 Gb/s interface (4 Serial-ATA connectors), 1 EIDE interface for optical drives	
Hard Drive Controller (PCI) Supported	Optional Ultra320 or Ultra320 RAID	
On-board RAID supported?	Yes	

After-Market Options

Graphics	Windows XP	Red Hat Linux	Part Number
Multi display solutions			
NVIDIA Quadro NVS 280 (64 MB, VGA & DVI - PCI)	32-Bit, 64-Bit	WS3	AA932A
NVIDIA Quadro NVS 280 (64 MB, VGA & DVI - PCIe)	32-Bit, 64-Bit	WS3	DY650A
DMS-59 to Dual DVI Cable for NVS cards	32-Bit, 64-Bit	WS3	DL139A
ATI FireGL V3100 (128 MB) - PCIe	32-Bit		PE949A
NVIDIA Quadro FX 540 (128 MB)	32-Bit, 64-Bit	WS3	PH791A
NVIDIA Quadro FX 1400 (128 MB) - PCIe	32-Bit		PM979A
ATI FireGL V5100 (128 MB) - PCIe	32-Bit		PB330A
NVIDIA Quadro FX 3400 (256 MB) - PCIe	32-Bit, 64-Bit	WS3	PB329B

Hard Drives	Windows XP	Red Hat Linux	Part Number
SATA Hard Drives			
HP 74 GB SATA 1.5 Gb/s 10K rpm HDD	32-Bit, 64-Bit	WS3	DX760A
HP 80 GB SATA 3Gb/s 7200 rpm HDD	32-Bit, 64-Bit	WS3	PY276AA
HP 160 GB SATA 3Gb/s NCQ 7200 rpm HDD (available 2H 2005)	32-Bit, 64-Bit	WS3	PV944A
HP 250 GB SATA 3Gb/s 7200 rpm HDD (available 2H 2005)	32-Bit, 64-Bit	WS3	EA788AA
HP 500 GB SATA 3Gb/s NCQ 7200 rpm HDD (available 2H 2005)	32-Bit, 64-Bit	WS3	PV943A
SCSI Hard Drives			
	Windows XP	Red Hat Linux	Part Number
HP 36 GB U320 SCSI 15K rpm HDD	32-Bit, 64-Bit	WS3	AA616A
HP 73 GB U320 SCSI 10K rpm	32-Bit, 64-Bit	WS3	AA613A
HP 73 GB U320 SCSI 15K rpm	32-Bit, 64-Bit	WS3	AA617A
HP 146 GB U320 SCSI 10K rpm	32-Bit, 64-Bit	WS3	AA614A
HP 300 GB U320 SCSI 10K rpm	32-Bit, 64-Bit	WS3	DY672A
Bracket HDD 3.5" to 5.25"	32-Bit, 64-Bit	WS3	DY659A
Cable, 3 port SCSI xw4200/6200	32-Bit, 64-Bit	WS3	DY661A

Controllers	Windows XP	Red Hat Linux	Part Number
SCSI Controllers			
LSI 20320A-R U320 1ch SCSI RAID Card	32-Bit		DZ554A

After-Market Options

Removable storage devices		Windows XP	Red Hat Linux	Part Number
	256 MB USB 2.0 Drive Key II	32-Bit, 64-Bit	WS3	PH657A
	1.44 MB Internal Floppy Drive	32-Bit, 64-Bit	WS3	DY670A
	HP DAT24i Internal DDS3 tape drive	32-Bit		C1555D
	HP DAT24e External DDS3 tape drive	32-Bit		C1556D
	HP DAT40i Internal DDS4 tape drive	32-Bit		C5686B
	HP DAT40e External DDS4 tape drive	32-Bit		C5687C
	HP DAT72i Internal DAT72 tape drive	32-Bit		Q1522A
	HP DAT72e External DAT72 tape drive	32-Bit		Q1523A

Input/Output Devices		Windows XP	Red Hat Linux	Part Number
	Keyboards			
	HP PS/2 Standard Keyboard	32-Bit, 64-Bit	WS3	DT527A
	HP USB Standard Keyboard	32-Bit, 64-Bit	WS3	DT528A
	Pointing Devices			
	HP PS/2 2-Button Scroll Mouse	32-Bit, 64-Bit	WS3	DD440B
	HP USB 2-Button Optical Scroll Mouse	32-Bit, 64-Bit	WS3	DC172B
	HP PS/2 3-Button Mouse	32-Bit, 64-Bit	WS3	AA778A
	HP USB Optical 3-button mouse	32-Bit, 64-Bit	WS3	DY651A
	HP USB Spaceball 5000	32-Bit, 64-Bit		DV675A
	HP USB SpaceMouse	32-Bit, 64-Bit		DZ203A

Networking		Windows XP	Red Hat Linux	Part Number
	NICs			
	Intel Pro/1000 MT	32-Bit, 64-Bit	WS3	DC193A
	Broadcom BCM5751 NetXtreme™ Gigabit Ethernet Controller for Workstations (PCI Express)	32-Bit, 64-Bit	WS3	DZ556A

Memory (DIMMs)		Windows XP	Red Hat Linux	Part Number
	533 MHz DDR2-533 ECC Unbuffered DIMMs			
	HP 256MB (1x256) DDR2-533 ECC RAM	32-Bit, 64-Bit	WS3	PY575AA
	HP 512MB (1x512) DDR2-533 ECC RAM	32-Bit, 64-Bit	WS3	PY576AA
	667 MHz DDR2-667 ECC Unbuffered DIMMs			
	HP 256MB (1x256) DDR2-667 ECC RAM	32-Bit, 64-Bit	WS3	PV939A
	HP 512MB (1x512) DDR2-667 ECC RAM	32-Bit, 64-Bit	WS3	PV940A
	HP 1GB (1x1GB) DDR2-667 ECC RAM	32-Bit, 64-Bit	WS3	PV941A

After-Market Options

Monitors	TFTs	Part Number
	HP TFT L2335 (23-inch)	P9615W#
	HP TFT L2035 (20.1-inch)	P9614W#
	HP TFT L1955 (19.1-inch)	PD974AA#ABA
	HP TFT L1755 (17-inch)	PL777AA#ABA

Multimedia	Windows XP	Red Hat Linux	Part Number
	1394A Firewire FH/LP PCI Card (Windows only)	32-Bit, 64-Bit	PA997A

NOTE: Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394A card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix (http://www.hp.com/support/linux_hardware_matrix) for details, and to the Linux User Manual (http://www.hp.com/support/linux_user_manual) for tips on user-enablement of the IEEE 1394A Card.

Optical Drives	Windows XP	Red Hat Linux	Part Number
DVD-ROM Drive			
16X/40X DVD-ROM w/ +R read	32-Bit, 64-Bit	WS3	AA620A
CD-ROM Drive			
48X Max CD-ROM Drive	32-Bit, 64-Bit	WS3	DC143B
CD-RW Drive			
48X/32X/48X CD-RW Drive (Roxio software)	32-Bit, 64-Bit	WS3	DE205B
Combo Drive			
48X/32X Combo DVD-ROM/CD-RW Drive (Roxio & WinDVD on Microsoft Windows)	32-Bit, 64-Bit	WS3	DE206B
DVD+/-RW Drive			
HP 16X DVD+/-RW, DL, LightScribe Drive (LightScribe software not supported on Windows XP Pro x64 Edition)	32-Bit, 64-Bit		DZ555B

Security	Part Number
Chassis clamp lock, universal, no cable	DE817A
Chassis clamp lock, universal, with cable	DE818A
Rear Port controller cover	DE896A

Brackets/Stands	Part Number
Depth Adjustable Rails (stationary)	332558-B21
Sliding Shelf kit	234672-B21
Fixed shelf kit	253449-B21

After-Market Options

Other Devices

	Part Number
Agere Systems PCI International Softmodem	DC132D
2nd serial port adapter	PA716A
Front Card Guide and Fan Kit	DY648A

Operating Systems

	Part Number
Red Hat Linux WS 3, Update 5, 32-bit OS (available 2H 2005)	EA698AA
Red Hat Linux WS 3, Update 5, 64-bit OS (available 2H 2005)	EA699AA
Red Hat Linux WS 4, Update 1, 32/64-bit OS (available 2H 2005)	EA700AA

Software

	Windows XP	Red Hat Linux	Part Number
HP Remote Graphics SW V2 for HP Systems LTU	32-Bit	WS3	PE672A
HP Remote Graphics SW V2 Receiver LTU	32-Bit	WS3	PE674A
HP Remote Graphics SW V2 CD-ROM Media	32-Bit	WS3	PE675A
HP Remote Graphics SW V3 for HP Systems LTU	32-Bit	WS3	PY682AA
HP Remote Graphics SW V3 Receiver LTU	32-Bit	WS3	PY684AA
HP Remote Graphics SW V3 CD-ROM Media	32-Bit	WS3	PY685AA
HP Remote SW for HP 1yr Update Subscription	32-Bit	WS3	PN680A
HP Remote SW Receiver 1yr Update Subscription	32-Bit	WS3	PN682A

Memory

Intel 955X Express chipset

DDR-2 SDRAM ECC MEMORY

Only unbuffered DDR-2 DIMMs are supported and must be either x8 or x16 width. It is not necessary to add memory in pairs. Memory upgrades are accomplished by adding single or multiple DIMMs of the same or varied sizes. This chart does not represent all possible memory configurations. The Intel 955X chipset supports ECC 667 MHz (PC2-5300) DDR-2 memory or non-ECC and ECC 533 MHz (PC2-4300) DDR-2 memory.

For best performance the total amount and type of memory loaded into Channel A and Channel B should be the same. If it is not, your computer will see all the RAM installed but will run the memory controller at a lower performance mode. For best performance add the memory in pairs rather than as a single DIMM (two 512 MB DIMMs will have better performance than a single 1 GB DIMM). Also, add the memory into both channels (e.g. one in socket 1 and one in socket 3) to take advantage of dual channel performance. If you have unused slots within a channel, make them socket 2 and socket 4. This provides the best margin for the memory bus.

CAUTION:

Mixing speeds will mean that the memory runs at the speed of the slowest DIMM.

Do not mix ECC and non-ECC memory. The system will not boot if ECC and non-ECC DIMMs are mixed.

Do not mix single-sided and double-sided DIMMs. Both sides of a double-sided DIMM must have the same memory size. Each rank (side) of the DIMM must be the same size.

MAXIMUM MEMORY

Supports up to 8 GB of ECC DDR-2 533 MHz or 4 GB of DDR-2 667 MHz SDRAM,


POSSIBLE MEMORY CONFIGURATIONS

Not all memory configurations possible are represented below.

DIMM Size	Slot			
	1	2	3	4
256 MB (single channel performance configuration)	256 MB			
512 MB	256 MB		256 MB	
1 GB	512 MB		512 MB	
1.5 GB	256 MB	512 MB	256 MB	512 MB
2 GB	1 GB		1 GB	
2 GB	512 MB	512 MB	512 MB	512 MB
4 GB	1 GB	1GB	1 GB	1GB
4 GB	2 GB		2 GB	
6 GB	1 GB	2 GB	1 GB	2 GB
8 GB	2 GB	2 GB	2 GB	2 GB

Storage

Tower configuration

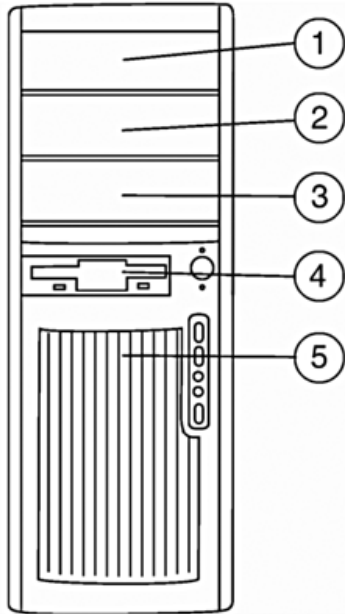

Convertible Minitower

	Quantity Supported	Position Supported	Controller
Optional Diskette Drive	1	4	Diskette
Optical Disk Drives	2	1, 2	IDE
Hard Disk Drives	2 standard (4 SATA w/AMO) (3 SCSI w/AMO)	5, 6 (and 2 or 3, for 3rd or 4th drives using optical bays, adapter kit(s) required)	SATA (and/or optional SCSI) Factory Integrated RAID* 0, 1 User configurable SATA RAID 0, 1 5, 10 standard

* NOTE: RAID 0, 1 available as a factory-integrated option on a single array of hard drives in 2H 2005

Additional Technical Specifications

System Board	
Architecture	Intel Pentium 4 EM64T/PCI-E
Chipset	Intel 955X Express North Bridge/ICH7R South Bridge
Super I/O Controller	SMSC SCH5307
System Board Form Factor	ATX
Processor Socket	LGA775
DIMM Connectors (DDR2, 1.8V)	4 ECC support
AGP Connector (1.5V)	None
Integrated Graphics	None
PCI Connectors (5.0V)	3 full length 33 MHz 32-bit
PCI Express Connectors (v1.0a)	1 x16 1 x8' (x4 bandwidth) 1 x1
Flash ROM	Yes
AC97 integrated audio	Yes
CD ROM IN (Audio)	No
AUX IN (Audio)	Yes
Internal speaker	Yes
Clear CMOS Button	Yes
CPU Fan Header	Yes
Chassis Fan Header	Yes
Chassis Speaker Header	Yes
CMOS Battery Holder – Lithium	Yes
Hood Lock Header	Yes
Hood Sensor Header	Yes
Multibay Header	No
Integrated SATA RAID	<ul style="list-style-type: none"> • Multiple Volume support to enable RAID 0, RAID 1, RAID 5, or RAID 10 on a single array • Support for 1 or 2 RAID arrays on 4 ports for RAID 0 or RAID 1 • RAID 1 spare and auto-rebuild • Matrix RAID support • AHCI support for NCQ drives • 3 Gb/s drive support
Integrated Broadcom NetXtreme Gigabit ethernet for HP	Yes
Wake-On-Lan®	Yes
ASF 1.0 and 2.0 (Alert Standard Format)	Yes
Power Supply Header	Yes
Power Switch, Power LED & Hard Drive LED Header	Yes
Password Clear Header	Yes
Riser Connector	None

Additional Technical Specifications

HDD activity LED Header	Yes
PCI extender that connects to System Board	None

Technical Specifications

Cooling	
Chassis Fan	92 mm
Processor Heatsink Fan	70 or 80 mm
Power Supply Fan	92 mm

Power Supply	
Full Ranging Input (Line Select Switch)	Yes
Active Power Factor Correction (APFC) (Input Current is nearly 1/2 a non-APFC PS)	Yes
Passive Power Factor Correction (PFC)	No
Operating Voltage Range	90 – 264 VAC/118 VAC
Rated Voltage Range	100 – 240 VAC
Rated Line Frequency	50-60 Hz/400Hz
Operating Line Frequency Range	47 – 66 Hz/393 – 407Hz
Rated Input Current	7.4A/7.4A
Maximum Rated Power	460 Watt Continuous
Heat Dissipation	Typical 733.8 btu/hr Maximum 2415.4 btu/hr
Power Supply Fan	92mm variable speed
PS Size	3.84 x 5.91 x 6.05 in (97.6 x 150 x 153.71 mm)
Energy Star Compliant	Yes
FEMP Standby Power Compliant (<2W in S5 - Power Off)	Yes if Wake-on-LAN disabled. System board may draw more power if Wake-on-LAN enabled.
Power Consumption in ES Mode - Suspend to RAM (S3) (Instantly Available PC)	~2W (will depend on configuration)
Surge Tolerant Full Ranging Power Supply	Withstands power surges up to 2000V
Typical configuration power consumption	One processor (1 x 3.6 GHz 2 MB L2 Cache, Pentium 4 Processor with HT Technology) One GB memory (2 x 512 MB) Two hard drives (2 x SATA 40 GB) CD-ROM drive PCI Express Graphics Card (NVIDIA FX 1400) One diskette Monitor
	Input Power consumption @ 120Vac/60Hz
Typical operating mode (system busy)	215 W = 733.8 btu/hr
Windows XP Idle	107 W = 365.2 btu/hr
Standby mode (S3)	2 W = 6.83 btu/hr
Hibernate mode (S4)	~1 W = 3.41 btu/hr *
Power Off (S5)	~2 W = 6.83 btu/hr *
	~1 W = 3.41 btu/hr *

Technical Specifications

* when Wake-on-LAN disabled

ROM Features	Description
PCI 3.0 Support	Full BIOS support for PCI Express through industry standard interfaces.
ASF 2.0 Compliant	Allows workstation status to be monitored on a remote console.
BIOS Boot Spec 1.01 +	Provides more control over how and from what devices the workstation will boot.
BIOS Power on	Users can define a specific date and time for the system to power on.
Instantly Available PC (Suspend to RAM - ACPI sleep state S3)	Allows for very low power consumption with quick resume time
ROM Based Computer Setup Utility (F10)	Review and customize system configuration settings controlled by the BIOS.
Remote System Installation via F12 (PXE) (Remote Boot from Server)	Allows a new or existing system to boot over the network and download software, including the operating system
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS
CMOS Archive and CMOS Restore	Holding down the power button restores the last known good BIOS settings.
Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Enable or disables serial, parallel, USB, audio, and network ports
Removable Media Write Control/ Boot Control	User can prevent the workstation from writing to or booting from removable media
Power-On Password	Prevents an unauthorized person from booting up the computer
Setup Password	Prevents an unauthorized person from changing the system configuration
Replicated Setup	Saves BIOS settings to diskette or USB flash device in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering Computer Setup Utility (F10)
Memory Change Alert (Requires HP Client Manager Software)	Alerts management console if memory is removed or changed
Thermal Alert (Requires HP Client Manager Software)	Monitors the temperature state within the chassis. Three modes: <ul style="list-style-type: none"> • NORMAL - normal temperature ranges • ALERTED - excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown • SHUTDOWN - excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console
Remote Wakeup	<ul style="list-style-type: none"> • System administrators can power on, restart, and power off a client computer from a remote location.
ACPI (Advanced Configuration and Power Management Interface)	<ul style="list-style-type: none"> • Allows the system to enter and resume from low power modes (sleep states) • Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system • Supports ACPI 2.0 for full compatibility with 64-bit operating systems
SMBIOS	System Management BIOS 2.3.5, previously known as DMI BIOS, for system management information
ROM revision levels	Identifies system ROM revision levels and reports in Computer Setup Utility (F10). Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information

Technical Specifications

System board revision level	<ul style="list-style-type: none"> Allows management SW to read revision level of the system board Revision level is digitally encoded into the HW and cannot be modified
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen

Industry Standard	Revision Supported by the BIOS
ACPI	Advanced Configuration and Power Management Interface, Version 2.0
ASF	Alert Standard Format Specification, Version 2.0
ATA (IDE)	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
ATAPI	ATAPI Removable Media Device BIOS Specification Version 1.0
BBS	BIOS Boot Specification v1.01
BIOS 32-bit Services	Standard BIOS 32-bit Service Directory Proposal
CD Boot	"El Torrito" Bootable CD-ROM Format Specification Version 1.0
EDD	<ul style="list-style-type: none"> Enhanced Disk Drive Specification Version 1.1 BIOS Enhanced Disk Drive Specification Version 3.0
EHCI	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0
PCI	<ul style="list-style-type: none"> PCI Local Bus Specification, Revision 2.3 PCI Power Management Specification, Revision 1.1 PCI Firmware Specification, Revision 3.0, Draft .7
PCI Express	PCI Express Base Specification, Revision 1.0a
PMM	POST Memory Manager Specification, Version 1.01
SATA	<ul style="list-style-type: none"> Serial ATA Specification, Revision 1.0a Serial ATA 3 Gb/s: Extensions to Serial ATA 1.5 Gb/s, Revision 1.0
SMBIOS	System Management BIOS Reference Specification, Version 2.4
SPD	PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2B
TPM	Trusted Computing Group TPM Specification Version 1.2
UHCI	Universal Host Controller Interface Design Guide, Revision 1.1
USB 1.1	Universal Serial Bus Revision 1.1 Specification
USB 2.0	Universal Serial Bus Revision 2.0 Specification

Other deployment & management features	
HP Client Management Solutions	<p>HP Client Management Solutions help simplify management of Workstations and significantly reduce total ownership costs. These solutions share a common design and are highly integrated due to the extensive work between HP and its partner Altiris.</p> <p>HP Client Manager Software is included free with all HP business PCs and Workstations. It enables central tracking, monitoring, and management of the hardware aspects of HP client systems:</p> <ul style="list-style-type: none"> Get valuable hardware information such as CPU, memory, video, and security settings Monitor system health to fix problems before they occur Install drivers and BIOS updates without visiting each PC Remotely configure BIOS and security settings Automate processes to quickly resolve hardware problems <p>Additional Altiris solutions (fee-based) are available to address Workstation management challenges through the entire IT lifecycle including:</p> <ul style="list-style-type: none"> Inventory assessment Software license compliance Personality migration Software image deployment

Technical Specifications

	<ul style="list-style-type: none"> • Software distribution • Asset management • Client backup and recovery • Problem resolution <p>Visit http://www.hp.com/go/easydeploy for more information, to download HP Client Manager Software, and to evaluate the Altiris solutions.</p>
System Software Manager (free)	A free utility that detects and updates BIOS, device drivers, and management agent versions on your networked PCs and workstations
Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
Software Restore CD	Restores computer to its original factory shipping image
Asset Tag	<ul style="list-style-type: none"> • Repository for storing company-specific property asset numbers for easy tracking • Initially set equal to the system serial number • Stored in a protected section of non-volatile memory that can be accessed and modified with the F10 Setup program
DIMM Serial Presence Detect	Detects whether or not memory DIMMs are present and their type
Hard drive serial number, model, and manufacturer	Hard drive manufacturer, model, and serial number is stored in the hard drive firmware and reported in ROM-based F10 setup
System serial number, model, & manufacturer	System serial number, model, & manufacturer stored in a non-volatile memory and can be retrieved with management SW or viewed in ROM-based F10 setup
ROM revision levels	Identifies system ROM revision levels and reports in ROM-based F10 setup Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information
System board revision level	<ul style="list-style-type: none"> • Allows management SW to read revision level of the system board • Revision level is digitally encoded into the HW and cannot be modified
Memory Change Alert (Requires HP Client Manager Software)	Alerts management console if memory is removed or changed
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen
Ultra ATA Integrity Monitoring (CRC Checking)	<p>A feature of SATA and SCSI, Cyclic Redundancy Checking provides data transfer verification and proactive notification of hard drive data transmission problems with recommendations for enhancing system performance. It detects all the following errors' types:</p> <ul style="list-style-type: none"> • single-bit errors • double-bit errors • an odd number of errors • error bursts up to 32-bits long

Technical Specifications

Drive Self Tests (DPS)	<ul style="list-style-type: none"> • Drive Protection System (Adaptec and LSI SCSI controllers do not offer DPS) • A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user. • Running independently of the operating system, it can be accessed through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced. <p>The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures DPS Access through F10 Setup during Boot (F10 diagnostic access not available with SCSI drives)</p>
SMART Technology (Self-Monitoring, Analysis and Reporting Technology)	<p>Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count. By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure.</p> <p>SMART I – Drive Failure Prediction SMART II – Off-Line Data Collection SMART III – Off-Line Read Scanning with Defect Reallocation</p>

Security Features	
Padlock support	Padlock loop in rear of chassis. Locks side cover and secures chassis from theft. (0.22" diameter)
Cable Lock Support	Kensington lock slot in rear of chassis. Locks side cover and secures chassis from theft. (3mm x 7mm opening)
Universal chassis clamp lock support	Threaded feature in rear of chassis. Locks side cover and locks cables to chassis. Secures chassis from theft and allows multiple units to be chained together when used with optional cable.
Solenoid lock and hood sensor	Yes
Rear port control cover (optional)	Locks rear IO cables to prevent cable theft.
Serial, Parallel, USB Enable/Disable	Enable or disable serial, parallel or USB ports and hide them from the operating system
Removable Media Write/Boot Control	Prevents the computer from being booted from removable media on supported devices (and can disable writes to media)
Power-On Password	Prevents an unauthorized person from booting up the computer
Setup Password	Prevents an unauthorized person from changing the system configuration

Technical Specifications

System Software Updating	
Product Change Notification	<ul style="list-style-type: none"> • Program to proactively communicate Product Change Notifications (PCNs) and Customer Advisories by email to customers, based on a user-defined profile. • PCNs provide advance notification of hardware and software changes to be implemented in the factory providing time to plan for transition. • Customer Advisories provide concise, effective problem resolution, greatly reducing the need to call technical support.
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console
Remote Wakeup/ Remote Shutdown	<ul style="list-style-type: none"> • System administrators can power on, restart, and power off a client computer from a remote location. • Enables cost-effective power consumption when the administrator needs to distribute software, perform security management, or update the ROM.
ROM Based Setup (F10) and Start-up Diagnostics	Yes
Support Software CD & WWW	Yes

Other Features	
ACPI-Ready Hardware	<p>Advanced Configuration and Power Management Interface (ACPI).</p> <ul style="list-style-type: none"> • Allows the system to wake from a low power mode. • Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system

Serviceability Features of System	
Access panel	Tool-less
Optical drives	Tool-less
Floppy drive	Tool-less
Hard drives	Tool-less
Expansion cards	Tool-less
Green user touch points	Yes, on tool-free internal chassis mechanisms
Color-coordinated cables and connectors	Yes
Memory	Tool-less, can be upgraded without removing any internal components
System board	Tool-less removal
Dual Color Power and HD LED on Front of Computer (Indicates Normal Operations and Fault Conditions)	green – normal red – fault
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS.
Configuration Record SW	Yes
Over-Temp Warning on Screen (Requires IM Agents)	Yes
Restore CD set	Restores the computer to its original factory shipping image
Flash ROM	Yes

Technical Specifications

3.3V Aux Power LED on System PCA	Yes
Dual Function 5V Aux Power LED (ON)/PS_ON LED (OFF) on System PCA	Yes
Diagnostic Power Switch LED on board	Yes
Clear Password Jumper	Yes
Clear CMOS Button	Yes
CMOS Battery Holder for easy Replacement	Yes
Processor ZIF Socket for easy Upgrade	Yes
DIMM Connectors for easy Upgrade	Yes
NIC LEDs (integrated) (Green & Amber)	Used to determine NIC status
ASF 1.0 support (Alert Standard Format)	Industry-standard specification for network alerting in operating system-absent environments
Dual function front power switch	Also acts as a reset switch when held for 4 seconds

Service and Support	On-site Warranty and Service (Note 1): This three-year, limited warranty and service offering delivers three years of on-site, next business-day (Note 2) service for parts and labor and includes free telephone support (Note 3) 24 x 7. Global coverage (Note 2) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering.
	NOTE 1 : Terms and conditions may vary by country. Certain restrictions and exclusions apply.
	NOTE 2 : On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.
	NOTE 3 : Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

Technical Specifications - Audio

High Definition Integrated Type	Integrated
Realtek ALC260 Audio	
High Definition Codec	Yes
FM Synthesis Support	Yes
OPL3 FM Synthesis Support	Yes
Sound Blaster Compatibility	Yes
SPDIF 6-channel pass-through	No
Audio Jacks	One Front fixed stereo analog Microphone-In (20-K ohm Input Impedance); One Front fixed stereo Headphone-Out (expects at least a 32ohm load) One Line-In* (12-K ohm Input Impedance)* One Line-Out * (less than 800 ohms Output Impedance, expects at least a 10-K ohm load) One Stereo analog Microphone-In* (20-K ohm Input Impedance)
	NOTE: *Rear audio port are re-taskable as Line-In, Line-Out, Microphone-In, or Headphone-Out with Optional driver, available only through download from HP support website and not supported by default. External Speakers need to be powered externally.
Sampling	44.1 kHz/48 kHz/96 kHz/192 kHz (output only)
Wavetable Syntheses (software)	Yes – GM and FM Midi Support, Direct Music and Down Loadable Soundset (4 Meg DLS Level 1 and 2 Support)
3D Positional Sound	No
Digital Audio	Yes
Analog Audio	Yes
DVD Audio	Yes
Number of Channels on Line-Out (mono/stereo)	Stereo (Left & Right channels)
Internal Audio Speaker Power Rating	1.5 W
Internal Speaker	Yes
Hardware Equalizer for Internal Speaker	No
External Speaker Jack (Line-Out)	Yes

Technical Specifications - Communications

Broadcom BCM5752 NetXtreme Gigabit Ethernet LOM (PCIe)	Connector	RJ-45
	Controller	Broadcom 5752 PCI-E LAN Controller
	Memory	Integrated 64KB receive buffer and 8KB transmit buffer
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus architecture	PCI-E 1.0a
	Data path width	X1
	Data path speed	2.5Gbit per sec per direction transfer rate
	Data transfer mode	Bus-master DMA
	Hardware certifications	
	Power requirement	1.5 watts @ +3.3V AUX supply
	Boot ROM support	Yes
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps
		10BASE-T (full-duplex) 20 Mbps
		100BASE-TX (half-duplex) 100 Mbps
		100BASE-TX (full-duplex) 200 Mbps
1000BASE-T, 1000 Mbps		
Operating system driver support	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux 3	
Management capabilities	WOL, PXE	
Alerting	ASF 2.0	

Intel Pro 1000 MT Gigabit NIC	Connector	RJ-45
	Controller	Intel 82540EM Gigabit Controller
	Memory	Integrated 96Kb frame buffer memory
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.1A, 802.1P, 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus architecture	PCI 2.2
	Data path width	32-bit, 33/66 MHz bus interface
	Data transfer mode	Bus-master DMA
	Hardware certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	Power requirement	1.48 watts @ +3.3V AUX supply with 5V tolerance
	Boot ROM support	Yes
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps
		10BASE-T (full-duplex) 20 Mbps
		100BASE-TX (half-duplex) 100 Mbps
		100BASE-TX (full-duplex) 200 Mbps
		1000BASE-T, 1000 Mbps
Environmental	Operating temperature	32° to 131° F (0° to 55° C)
	Operating humidity	85% at 131° F (55° C)
Dimensions	6.4 x 4.8 x 0.8 in (16.3 x 12.1 x 1.9 cm)	

Technical Specifications - Communications

	Operating system driver support	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux	
	Management capabilities	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Intel PROset II utility	
	Kit contents	The Intel Pro 1000 MT NIC, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement	
Broadcom BCM5751 NetXtreme Gigabit Ethernet Controller (PCI-E)	Connector	RJ-45	
	Controller	Broadcom 5751 PCI-E 1.0a LAN Controller	
	Memory	Integrated 96Kb frame buffer memory	
	Data rates supported	10/100/1000 Mbps	
	Compliance	IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control	
	Bus architecture	PCI-E 1.0a	
	Data path width	X1	
	Data path speed	2.5Gbit per sec per direction transfer rate	
	Data transfer mode	Bus-master DMA	
	Hardware certifications	FCC class B, NRTL Mark Canada and United States, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia	
	Power requirement	3.1 watts @ +3.3V AUX supply	
	Boot ROM support	Yes	
	Network transfer rate		10BASE-T (half-duplex) 10 Mbps
			10BASE-T (full-duplex) 20 Mbps
		100BASE-TX (half-duplex) 100 Mbps	
		100BASE-TX (full-duplex) 200 Mbps	
		1000BASE-T, 1000 Mbps	
Environmental	Operating temperature	32° to 131° F (0° to 55° C)	
	Operating humidity	85% at 131° F (55° C)	
Dimensions		4.4 x 2.2 x 0.08 in (11.2 x 5.5 x .2 cm)	
	Operating system driver support	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3	
	Management capabilities	WOL, PXE, Remote cable management	
	Alerting	ASF 2.0	
	Kit contents	Broadcom 5751, CD, Broadcom NetXtreme Gigabit Ethernet PCI NIC, drivers, quick install guide, product warranty statement	

Agere Systems PCI International Softmodem

Data Transmission	Technology speeds: 56,000 Kbps maximum downstream data, controllerless NOTE: 56 Kbps technology refers to download speeds only and requires compatible modems at server sites. Other conditions may limit modem speed. FCC limitations allow a maximum of 53 Kbps during download transmissions.
Data Speeds	(Upload only) 33,600/31,200/28,800/26,400/21,600/19,200/16,800/14,400/12,000/9,600/7,200/4,800/2,400/1,200/300
Data Standards	ITU-T V.90, ITU-T, ITU-T V.34, V.44, V.42, V.42bis21, V.32bis, Bell 212A, and Bell 103
Fax Speeds	14,400/12,000/9,600/7,200/4,800/2,400/1,200/300 b/s
Fax Mode Capabilities	ITU-T T.31 class 1 FAX, V. 17, V.29, V.27ter, and V.21 Channel 2

Technical Specifications - Communications

Error Correction and Data Compression	V.44, 42bis, V.42 and MNP2-5
Power Management	ACPI; PPMI 1.1 and wake support with PME and Vaux; meets PCI 2.3 requirements and PC 2001 requirements
Upgradeability	Driver upgradeable for future enhancements
Video	ITU-T V.80 video ready interface
Other	TIA/EIA 602 standard AT command set Integrated DTE interface with speeds of up to 115.2 Kbps, parallel 16550a UART-compatible interface Optional ring wakeup signal
Operating Temperature	32° to 158° F (0° to 70° C)
Operating Humidity	20% to 90%, non-condensing
Operating System Support	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition
OS Driver Support	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition
Power	Requires a 3.3-V auxiliary power rail on PCI bus Uses only one PCI load (i.e., one grant/request pair), one shared IRQ, one electrical load
Chipset	Agere Systems SV92PL – Integrated PCI interface with 5-V tolerant buffers and CardBus support
Dimensions (L X H)	Complies with PCI low profile specifications-6.7 x 2.3 in (17.0 x 5.8 cm) and supports high- and low-profile brackets
Connection	Single RJ-11 connector
Other Features	Digital line protection, call progress monitoring via on-board piezo device, support for high profile and low profile brackets, PnP ID support
Safety	UL recognized to UL 1950, 3rd edition (U.S. and Canada); IEC 950 (TUV, NEMKO, DEMKO, SEMKO); CE Mark, EC 950 (TUV, NEMKO, DEMKO, SEMKO, CE mark
EMC	FCC Part 15, IC ES003, EN 55022, 3rd edition, EN 55024, annex A, EN 61000-4-6, EN 61000-4-8
Telecom	FCC Part 68, IC-CS-03 (Canada); Worldwide PTT approvals Not available in Korea or the Republic of South Africa.
Health	Bare PCB material compliant to 94V-0 or better (marked as such)
Other	PC 2001 compliant, PCI version 2.3, WHQL approved; ACPI compliant
Kit Contents	DC132D : Agere Systems PCI International Softmodem with full-height bracket attached, additional low-profile bracket, RJ11 modem cable, driver and documentation CD. NOTE: RJ11 modem adapter is not included. DC131C #xxx: RJ11 modem adapter kit for use with DC132D #ACP: Austria, #ABW: Belgium (Dutch/Flemish), #AKN: Bosnia, Herzegovna, Croatia, Slovenia, Yugoslavia (Slovenian), #AKB: Czech Republic (Czech) & Slovakia, #ABF: France, #ABD: Germany, #AB7: Greece, #AKC: Hungary, #ABT: Israel, #ABZ: Italy, #ABH: Netherlands, #UUW: Nordic Region, #ACB: Russia, #ACQ: South Africa, #ACD: Switzerland, #AB8: Turkey, #ABU: UK, #ABG: Australia, New Zealand, #ACJ: India.

Technical Specifications - Controllers

LSI Logic LSI20320 Ultra320 SCSI single channel host adapter	Bus architecture	PCI-X (backward compatible with PCI)
	Number of supported devices	Up to 15 SCSI devices
	Interface protocol	64 bit, 133MHz PCI-X
	Host bus transfer rate	Up to 1 MB/s
	SCSI data transfer rate	Up to 320 MB/s per channel
	SCSI Bus	Wide Ultra320, Low Voltage Differential, and Ultra Wide Single-Ended
	Internal connector	68-pin HD
	External connector	68-pin VHDCI
	Total connectors	2
	Plug and Play Support	No
	Dimensions (H x L)	6.6 x 2.5 in (16.9 x 6.4 cm)
	Approvals	CE, VCCI, Canada, C-Tick, FCC class B, UL 94VO
	Operating system support	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3
	Kit contents	Controller card, driver CD, LED cables, user documentation and warranty card.

LSI Logic LSI 20320A-R Ultra320 SCSI RAID single-channel host adapter	Bus architecture	PCI-X (backward compatible with PCI)
	RAID level supported	single RAID volume RAID 0, 1, or 1E
	Number of supported devices	Up to 15 SCSI devices
	Interface protocol	64 bit, 133MHz PCI-X
	Host bus transfer rate	Up to 1 MB/s
	SCSI data transfer rate	Up to 320 MB/s per channel
	SCSI Bus	Wide Ultra320, Low Voltage Differential, and Ultra Wide Single-Ended
	Internal connector	68-pin HD
	External connector	68-pin VHDCI
	Total connectors	2
	Plug and Play Support	No
	Dimensions (H x L)	6.6 x 2.5 in (16.9 x 6.4 cm)
	Approvals	CE, VCCI, Canada, C-Tick, FCC class B, UL 94VO
	Operating system support	Microsoft Windows XP Professional, Red Hat Enterprise Linux Workstation 3
Kit contents	Controller card, driver CD, LED cables, user documentation and warranty card.	

Technical Specifications - Hard Drives

Serial ATA Hard Drives (7200 rpm)	40 GB	Capacity	40020664320 bytes		
		Height	1 in (2.6 cm)		
		Width	Media diameter: 3.5 in (8.9.x cm) Physical size: 4 in (10.2 cm)		
		Interface	Serial ATA		
		Synchronous Transfer Rate (Maximum)	150 MB/s		
		Buffer	2 MB		
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	1.0 ms	
			Average	8.5 ms	
			Full-Stroke	18.0 ms	
		Rotational Speed	7,200 rpm		
		Logical Blocks	78,165,360		
		Operating Temperature	32° to 140° F (0° to 60° C)		

SATA 1.5 Gb/s Hard Drives (10,000 rpm)	74 GB	Capacity	74,355,769,344 bytes		
		Height	1.0 in (2.54 mm)		
		Width	Media diameter: 3.3 in (84mm) Physical size: 4 in (10.2 cm)		
		Interface	Serial ATA		
		Synchronous Transfer Rate (Maximum)	150 MB/s		
		Buffer	8 MB		
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 ms	
			Average	4.5 ms	
			Full-Stroke	10.2 ms	
		Rotational Speed	10,000 rpm		
		Logical Blocks	145,226,112		
		Operating Temperature	41° to 140° F (5 to 60° C)		

Technical Specifications - Hard Drives

SATA 3.0 GB/s Hard drives (7200 rpm)	80 GB	Capacity	80,026,361,856 bytes			
		Height	1.0 in (2.54 mm)			
		Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)			
		Interface	Serial ATA			
		Synchronous Transfer Rate (Maximum)	3 GB/s			
		Buffer	8 MB			
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	<=2.0 ms		
			Average	8.9 ms		
			Full-Stroke	<=21 ms		
		Rotational Speed	7,200 rpm			
		Logical Blocks	156,301,488			
		Operating Temperature	41° to 131° F (5° to 55° C)			
			160 GB	Capacity	163,928,604,672 bytes	
				Height	1.0 in (2.54 cm)	
Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)					
Interface	Serial ATA					
Synchronous Transfer Rate (Maximum)	3 GB/s					
Buffer	8 MB					
Seek Time (typical reads, includes controller overhead, including settling)	Single Track			<=2.0 ms		
	Average			8.9 ms		
	Full-Stroke			<=21 ms		
Rotational Speed	7,200 rpm					
Logical Blocks	320,173,056					
Operating Temperature	41° to 131° F (5° to 55° C)					

Technical Specifications - Hard Drives

Ultra320 SCSI Hard Drives (10,000 rpm)	73 GB	Capacity	73,407,865,856 bytes	
		Height	1.0 in (2.54 mm)	
		Width	3.5 in (8.9 cm)	
		Interface	68 pin LVD SCSI	
		Synchronous Transfer Rate (Maximum)	320 MB/s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 msec
			Average	<4.5 msec
			Full-Stroke	<11.0 msec
		Rotational Speed	10,000 rpm	
		Logical Blocks	143,374,738	
		Operating Temperature	40° to 130° F (5° to 55° C)	
			146 GB	Capacity
Height	1.0 in (2.54 mm)			
Width	3.5 in (8.9 cm)			
Interface	68 pin LVD SCSI			
Synchronous Transfer Rate (Maximum)	320 MB/s			
Buffer	8 MB			
Seek Time (typical reads, includes controller overhead, including settling)	Single Track			0.3 msec
	Average			<4.5 msec
	Full-Stroke			<11.0 msec
Rotational Speed	10,000 rpm			
Logical Blocks	286,749,488			
Operating Temperature	40° to 130° F (5° to 55° C)			
	300 GB			Capacity
		Height	1.0 in (2.54 mm)	
		Width	3.5 in (8.9 cm)	
		Interface	68 pin LVD SCSI	
		Synchronous Transfer Rate (Maximum)	320 MB/s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 msec
			Average	<4.5 msec
			Full-Stroke	<11.0 msec
		Rotational Speed	10,000 rpm	
		Logical Blocks	585,937,500	
		Operating Temperature	40° to 130° F (5° to 55° C)	

Technical Specifications - Hard Drives

Ultra320 SCSI Hard Drives (15,000 rpm)	36 GB	Capacity	36,420,075,520 bytes	
		Height	1.0 in (2.54 mm)	
		Width	3.5 in (8.9 cm)	
		Interface	68 pin LVD SCSI	
		Synchronous Transfer Rate (Maximum)	320 MB/s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 msec
			Average	<4.5 msec
			Full-Stroke	<11.0 msec
		Rotational Speed	15,000 rpm	
		Logical Blocks	71,132,960	
		Operating Temperature	40° to 130° F (5° to 55° C)	
			73 GB	Capacity
Height	1.0 in (2.54 mm)			
Width	3.5 in (8.9 cm)			
Interface	68 pin LVD SCSI			
Synchronous Transfer Rate (Maximum)	320 MB/s			
Buffer	8 MB			
Seek Time (typical reads, includes controller overhead, including settling)	Single Track			0.3 msec
	Average			<4.5 msec
	Full-Stroke			<11.0 msec
Rotational Speed	15,000 rpm			
Logical Blocks	143,374,738			
Operating Temperature	40° to 130° F (5° to 55° C)			

Technical Specifications - Removable Storage

USB 2.0 Drive Key II	Dimensions (HxWxD)	0.32 x 0.63 x 2.67 in (0.8 x 1.6 x 6.8 cm)		
	Storage Capacity	256 MB		
	Weight	0.05 lb (0.02 kg)		
	USB Specification	Read	Capable of 6.0 MB/s sustained read speed in USB 2.0 system	
		Write	Capable of 6.0 MB/s sustained write speed in USB 2.0 system	
	Operating Temperature	41° to 122° F (5° to 50° C)		
	Non-operating Temperature	-22° to 140° F (-30° to 60° C)		
	Operating System Support	Windows XP Professional, Windows XP Professional x64 Edition. No driver is required for this device. Native support is provided by the operating system.		
	Option Kit Contents	HP Drive Key II, documentation		

Technical Specifications - Input/Output Devices

PS/2 OR USB '04 Standard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
		Weight	2 lb (0.9 kg) minimum
	Electrical	Operating voltage	+ 5VDC \pm 5%
		Power consumption	50-mA maximum (with three LEDs ON)
		ESD	CE level 4, 15-kV air discharge
		EMI - RFI	Conforms to FCC rules for a Class B computing device
	Mechanical	Microsoft PC 99 - 2001	Functionally compliant
		Languages	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
		Cable length	6 ft (1.8 m)
		Microsoft PC 99 - 2001	Mechanically compliant
		Acoustics	43-dBA maximum sound pressure level
	Environmental	Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
		Non-operating vibration	4-g peak acceleration
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
		Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Operating system support	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3	
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	
	Kit contents	Keyboard, keyboard software media, installation guide, warranty card, safety and comfort	

Technical Specifications - Input/Output Devices

HP PS/2 Scroll Mouse	Dimensions	3.8 x 6.3 x 11.6 cm (1.5 x 2.5 x 4.6 in)	
	Weight	4.44 oz (126 g)	
	Environmental	Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, 6 surfaces
		Non-operating shock	80 g, 6 surfaces
		Operating vibration	2 g peak acceleration
		Non-operating vibration	4 g peak acceleration
		Drop (out-of-box)	26 in (66 cm) on carpet, 6-drop sequence
		Drop (out-of-box)	1 m on asphalt tile over concrete, 6-drop sequence
	Electrical	Operating voltage	5 VDC \pm 10%
		Power consumption	15 mA
System consumption		PS/2 mini-din connector	
ESD		CE level 4, 15 kV air discharge	
EMI-RFI		Conforms to FCC rules for a Class B computing device	
Mechanical	Microsoft PC99 - 2001	Functionally compliant	
	Resolution	400 \pm 20% DPI	
	Tracking speed	10 in/s maximum	
	Acceleration	100 in/s	
	Switch actuation	65 g nominal peak force	
	Switch life	1,000,000 operations (using Hasco modified tester)	
	Switch type	Low force micro-switches	
	Tracking mechanism life	155 mi (250 km) at average speed of 10 in/s	
	Cable length	6 ft (1.8 m)	
	Microsoft PC99 - 2001	Mechanically compliant	
Scroll wheel	Width	8 mm	
	Diameter	0.99 in (25.2 mm)	
	Maximum rotation speed	30 mm/s	
	Switch type	Light force micro-switch	
	Switch life	1 million operations	
Regulatory approvals	Mechanical life	Minimum 200,000 revolutions	
	Compliant	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	Operating system support	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3	

Technical Specifications - Input/Output Devices

HP 2-button Optical Scroll Mouse (USB)	Dimensions (H x L x W)	1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)
	Weight	0.27 lb (0.12 kg)
	Cable length	72.8 in (185 cm)
	System requirements	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3

HP 3-Button Mouse (PS/2)	Dimensions/Weight	Height	1.42 in (3.6 cm)
		Length	4.17 in (10.7 cm)
		Width	2.87 in (7.4 cm)
		Weight	5.20 oz (150 g)
	Environmental	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating temperature	-4° to 140° F (-20° to 60° C)
	Mechanical	Operating humidity	10% to 90% (non-condensing at ambient)
		Resolution	400 20% DPI
		Tracking speed	10 in/s Maximum
		Switch life	1,000,000 operations (using Hasco modified tester)
		Switch type	Micro-switches
		Tracking mechanism life	155 miles (250 km) at average speed of 10 in/s
		Cable length	6 ft (1.8 m)
		PC98-99	Mechanically compliant

HP 3-Button Optical USB Mouse	Dimensions/Weight	Height	1.5 in (3.76 cm)
		Length	4.5 in (11.56 cm)
		Width	2.4 in (6.19 cm)
		Weight	3.80 oz (108 g)
	Environmental	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating temperature	-4° to 140° F (-20° to 60° C)
	Mechanical	Operating humidity	10% to 90% (non-condensing at ambient)
		Tracking speed	6 in/s Maximum
		Switch life	3,000,000 operations
		Switch type	Micro-switches
		Tracking mechanism life	155 miles (250 km) at average speed of 10 in/s
		Cable length	6 ft (1.8 m)
		PC98-99	Mechanically compliant
		System requirements	Microsoft Windows XP Available USB port

Technical Specifications - Input/Output Devices

Spaceball 5000 (USB)	Physical characteristics	Dimensions (H x W x D)	3.0 x 6.0 x 8.4 in (7.6 x 15.2 x 21.3 cm)
		Ball Diameter	2.2 in (5.6 cm)
		Weight	2.1 lb (9.94 kg)
		Features	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw) Certified for leading CAD and DCC applications
	Environmental	Operating temperature	50° to 104° F (10° to 40° C)
		Non-operating temperature	43° to 140° F (6° to 60° C)
		Operating humidity	8% to 80% (non-condensing at ambient)
		Non-operating humidity	5% to 80% (non-condensing at ambient)
	Mechanical	Buttons	12 programmable (unshifted)
		Ball Force Range	0.5 - 8.2N/1.8 - 29.5 oz
Ball Torque Range		0.085 – 0.33 oz-in. (6.91 Nmm)	
Resolution		10 bits	
Serial Specifications	Connector	USB 1.1 or greater	
	Cable Length	12.8 ft. (3.9 m)	
	Data Rate	USB model – 16 msec	
	Flow Control	Xon/Xoff (on PS/2 model only)	
Software Drivers Available	USB model	Microsoft Windows XP Professional	
System Requirements	Disk Space	10 MB free disk space	
Regulatory Approvals	UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick		

HP SpaceMouse Plus USB	Physical characteristics	Dimensions (H x W x D)	7.4 x 4.72 x 1.73 in (18.8 x 12.0 x 4.4 cm)
		Cap Diameter	2 x 6.5 x 6.6 mm
		Weight	1.5 lb (0.68 kg)
		Features	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw) Certified for leading CAD and DCC applications
	Environmental	Operating temperature	41° to 140° F (5° to 60° C)
		Non-operating temperature	-13° to 158° F (-25° to 70° C)
		Operating humidity	10 to 98 % RH (non-condensing)
		Non-operating humidity	10 to 98 % RH (non-condensing)
	Mechanical	Buttons	11 programmable (unshifted)
		Cap Force Range	0.2 N – 4.5 N
Cap Torque Range		4 Nmm to 100 Nmm	
Resolution		8 bit	
USB Specifications	Connector	USB 1.1 or greater	
	Cable Length	6.56 ft (2 m)	
	Data Rate	16 msec	
Software Drivers Available	Microsoft Windows XP Professional		
System Requirements	Disk Space	10 MB free disk space	

Technical Specifications - Input/Output Devices

Regulatory Approvals UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick

1394 FireWire PCI card

Device Interface Protocol	IEEE-1394a
Data Rate	400 Mbps
Devices Supported	IEEE-1394 compliant devices
Bus Interface	PCI
Physical	Low profile PCI card with a full height bracket
Environmental	Operating temperature 41° to 95° F (5° to 35° C)
	Non-operating temperature 158° F (70° C) and above
	Relative humidity 10% to 90%
Ports	2 rear and 2 front (depends on model of PC)
Minimum System Requirements	Windows XP Professional, Windows XP Professional x64 Edition, Linux support with the HP Installer Kit for Linux Pentium II 266 or faster 32-MB RAM 1-GB Hard Drive CD-ROM drive Built in sound system

Technical Specifications - Optical Devices

48X CD-ROM Drive	Form Factor	5.25-in, half-height, tray load	
	Mounting Orientation	Horizontal or vertical	
	Interface	ATAPI/EIDE	
	Dimensions (HxWxD)	1.63 x 5.83 x 7.27 in (4.13 x 14.6 x 18.5 cm)	
	Weight	1.76 lb (0.8 kg)	
	Data Transfer Rates - Read	Digital audio extraction (minimum) – 1,200 KB/s (8X) CD read – up to 7,200 KB/s (48X)	
	Media and Formats - Read	CD Media	stamped, CD-R, CD-RW (LS, HS, US)
		CD Capacities	180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)
		CD Formats	CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD
	Access Times (typical reads, including settling)	CD-ROM Mode 1	< 125 ms
		Full Stroke CD	< 210 ms
		Start-up Time (typical)	< 7 s (single session), < 30 s (multi-session)
		Stop Time (typical)	< 4 s
		Write Buffer Size	128 KB (minimum)
Data Transfer Modes		PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 0 (16.7 MB/s); UltraDMA Mode 2 (33.3 MB/s)	
Power		Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC \pm 5% - 100 mV ripple p-p	
		12 VDC \pm 5% - 200 mV ripple p-p	
	DC Current	5 VDC - < 1000 mA typical, < 1600 mA maximum	
		12 VDC - < 600 mA typical, < 1400 mA maximum	
Audio Output	Total Drive Power (standby mode)	< 2.5 Watt	
	Line-Out	0.7 VRMS	
	Signal-to-Noise Ratio	74 dB	
	Channel Separation	65 dB	
Configuration Jumper Block	Master, slave, and cable select modes		
Operating Conditions (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)	
	Humidity	10% to 80%	
Certifications, Approvals	MMC-3 support, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B)		

Technical Specifications - Optical Devices

Operating Systems Supported	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3
Supplied Software	None

16X/48X DVD-ROM Drive with +R Read Support	Form Factor	5.25-in, half-height, tray load														
	Mounting Orientation	Horizontal or vertical														
	Interface	ATAPI/EIDE														
	Dimensions (W x H x D)	5.88 x 1.71 x 7.87 [max] in (149.5 x 43.25 x 200.0 [max] mm) (external, excluding bezel)														
	Weight	2.6 lb (1.2 kg)														
	Data Transfer Rates – Read	<table> <tr> <td>CD-ROM Read</td> <td>7200 KB/s (48X) Max</td> </tr> <tr> <td>DVD-ROM Read</td> <td>21,600 KB/s (16X) Max</td> </tr> <tr> <td>Digital Audio Extraction</td> <td>6000 KB/s (40X) Max</td> </tr> </table>	CD-ROM Read	7200 KB/s (48X) Max	DVD-ROM Read	21,600 KB/s (16X) Max	Digital Audio Extraction	6000 KB/s (40X) Max								
CD-ROM Read	7200 KB/s (48X) Max															
DVD-ROM Read	21,600 KB/s (16X) Max															
Digital Audio Extraction	6000 KB/s (40X) Max															
	Media and Formats – Read	<table> <tr> <td>CD Media</td> <td>stamped; CD-R; CD-RW (LS, HS, US)</td> </tr> <tr> <td>CD Capacities</td> <td>180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)</td> </tr> <tr> <td>CD Formats</td> <td>CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD</td> </tr> <tr> <td>DVD Media</td> <td>stamped (single and double layer); DVD+R; DVD+RW; DVD+R DL; DVD-R; DVD-RW</td> </tr> <tr> <td>DVD Capacities</td> <td>4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R)</td> </tr> <tr> <td>DVD Formats</td> <td>DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border; DVD+R version 1.2 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2</td> </tr> </table>	CD Media	stamped; CD-R; CD-RW (LS, HS, US)	CD Capacities	180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)	CD Formats	CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD	DVD Media	stamped (single and double layer); DVD+R; DVD+RW; DVD+R DL; DVD-R; DVD-RW	DVD Capacities	4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R)	DVD Formats	DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border; DVD+R version 1.2 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2		
CD Media	stamped; CD-R; CD-RW (LS, HS, US)															
CD Capacities	180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)															
CD Formats	CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD															
DVD Media	stamped (single and double layer); DVD+R; DVD+RW; DVD+R DL; DVD-R; DVD-RW															
DVD Capacities	4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R)															
DVD Formats	DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border; DVD+R version 1.2 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2															
	Access Times (typical reads, including settling)	<table> <tr> <td>DVD-ROM Single Layer</td> <td>< 140 ms</td> </tr> <tr> <td>CD-ROM Mode 1</td> <td>< 125 ms</td> </tr> <tr> <td>Full Stroke DVD</td> <td>< 250 ms</td> </tr> <tr> <td>Full Stroke CD</td> <td>< 210 ms</td> </tr> <tr> <td>Startup Time</td> <td>< 10 seconds (typical)</td> </tr> <tr> <td>Stop Time</td> <td>< 4 seconds</td> </tr> <tr> <td>Data Transfer Modes</td> <td>PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 3 (44.4 MB/s)</td> </tr> </table>	DVD-ROM Single Layer	< 140 ms	CD-ROM Mode 1	< 125 ms	Full Stroke DVD	< 250 ms	Full Stroke CD	< 210 ms	Startup Time	< 10 seconds (typical)	Stop Time	< 4 seconds	Data Transfer Modes	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 3 (44.4 MB/s)
DVD-ROM Single Layer	< 140 ms															
CD-ROM Mode 1	< 125 ms															
Full Stroke DVD	< 250 ms															
Full Stroke CD	< 210 ms															
Startup Time	< 10 seconds (typical)															
Stop Time	< 4 seconds															
Data Transfer Modes	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 3 (44.4 MB/s)															

Technical Specifications - Optical Devices

Power	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC \pm 5% – 100 mV ripple p-p 12 VDC \pm 5% – 200 mV ripple p-p
	DC Current	5 VDC – <800 mA typical, < 1000 mA maximum 12 VDC – < 870 mA typical, <1800 mA maximum
	Total Drive Power (standby mode)	< 2.5 Watt
Audio Output Level	Line-Out	0.7 VRMS
	Signal-to-Noise Ratio	85 dB
	Channel Separation	65 dB
Configuration Jumper Block	Master, slave, and cable select modes	
Data Interface Connector	40-pin, shrouded and keyed, flat ribbon	
Operating Conditions (all conditions non-condensing)	Temperature (operating)	41° to 122° F (5° to 50° C)
	Relative Humidity (operating)	10% to 85%
	Maximum Wet Bulb Temperature (operating)	86° F (30° C)
Certifications, Approvals	MMC II support, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B)	
Operating systems supported	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3	
Supplied Software (for Windows XP)	Roxio Cineplayer Movie Playback	

HP 48X CD-RW

Form Factor	5.25-inch, half-height, tray-load
Mounting Orientation	Horizontal or vertical
Interface	ATAPI/EIDE
Dimensions (HxWxD)	1.63 x 5.75 x 7.27 [max] in (4.13 x 14.6 x 18.5 [max] cm) (external, excluding bezel)
Weight (max)	2.0 lb (0.9 kg)

Technical Specifications - Optical Devices

Read Only Disc Parameters	Data Transfer Rates - Read	Digital audio extraction (minimum) - 1,800 KB/s (12X) CD read - up to 7,200 KB/s (48X)
	Media and Formats - Read	CD Media: stamped; CD-R; CD-RW (LS, HS, US) CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute) CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD
Writeable Disc Parameters	Data Transfer Rates - Write	CD-R write - 2100 KB/s (14X) to 7200 KB/s (48X) CD-RW write - 600 KB/s (4X) CD-RW write (high speed) - 1500 KB/s (10X) to 1800 KB/s (12X) CD-RW write (ultra high speed) - 2400 KB/s (16X) to 4800 KB/s (32X)
	Media and Formats - Write	CD Media: CD-R; CD-RW (LS, HS, US) CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute) CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD
	Write Methods	Disc-at-once, session-at-once, track-at-once, incremental fixed and variable packet, multi-session
Access Times (typical reads, including settling)	CD-ROM Mode 1	< 125 ms
	Full Stroke CD	< 210 ms
	Start-up Time (typical)	< 7 s (single session), < 30 s (multi-session)
	Stop Time (typical)	< 4 s
	Write Buffer Size	2 MB
	Data Transfer Modes	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 2 (33.3 MB/s)

Technical Specifications - Optical Devices

Power	Source	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p
	DC Current	5 VDC (< 1000 mA typical, < 1600 mA maximum) 12 VDC (< 600 mA typical, < 1400 mA maximum)
	Total Drive Power (standby mode)	< 2.5 Watt
Audio Output	Line-Out	0.7 VRMS
	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
Configuration Jumper Block	Master, slave, and cable select modes	
Operating Conditions	Temperature	41° to 122° F (5° to 50° C)
	Humidity	10% to 90% 10% to 90%
Certifications, Approvals	MMC-3 support, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B)	
Operating Systems Supported	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3	
Supplied Software (for Windows XP)	Roxio Digital Media Plus: Create or copy CDs and DVDs, including music and data CDs, and data DVDs	
	Dantz Retrospect Express: Back up systems to CD, DVD, or tape media.	

48X Combo CD-RW/DVD-ROM

Form Factor	5.25-inch, half-height, tray-load
Mounting Orientation	Horizontal or vertical
Interface	ATAPI/EIDE
Dimensions (HxWxD)	5.77 x 1.71 x 7.87 [max] in (14.66 x 4.34 x 20.0 [max] cm) (external, excluding bezel)
Weight (max)	2.6 lb (1.2 kg)

Technical Specifications - Optical Devices

Read Only Disc Parameters	Data Transfer Rates - Read	<p>CD read - 7200 KB/s (48X) Max Digital audio extraction (minimum) - 1,800 KB/s (12X)</p>
	Media and Formats - Read	<p>DVD ROM read - 21,632 KB/s (16X) Max CD Media: stamped; CD-R; CD-RW (LS, HS, US) CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute) CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD</p>
Writeable Disc Parameters	Data Transfer Rates - Write	<p>DVD Media: stamped (single and double layer); DVD+R; DVD+RW; DVD+R DL; DVD-R; DVD-RW DVD Capacities: 4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R)</p>
	Media and Formats - Write	<p>DVD Formats: DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border ; DVD+R version 1.2 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2</p>
	Write Methods	<p>CD-R write - 2100 KB/s (14X) to 7200 KB/s (48X) CD-RW write - 600 KB/s (4X) CD-RW write (high speed) - 1500 KB/s (10X) to 1800 KB/s (12X) CD-RW write (ultra high speed) - 2400 KB/s (16X) to 4800 KB/s (32X) CD Media: CD-R; CD-RW (LS, HS, US) CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute) CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD Disc-at-once, session-at-once, track-at-once, incremental fixed and variable packet, multi-session</p>

Technical Specifications - Optical Devices

Access Times (typical reads, including settling)	Random DVD	< 140 ms
	Random CD	< 125 ms, (typical)
	Full Stroke DVD	< 250 ms
	Full Stroke CD	< 210 ms
	Startup Time (single)	< 7 seconds (typical)
	Startup Time (multi-session)	< 30 seconds (typical)
	Stop Time (typical)	< 4 s
	Cache Buffer	2 MB (minimum)
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44 Mbytes/s)
	Power	Source
DC Power Requirement		5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p
DC Current		5 VDC (< 1000 mA typical, < 1600 mA maximum)
		12 VDC (< 600 mA typical, < 1400 mA maximum)
Total Drive Power (standby mode)		< 2.5 Watt
Audio Output	Line-Out	0.7 VRMS
	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
Configuration Jumper Block	Master, slave, and cable select modes	
Data Interface Connector	40-pin, shrouded and keyed, flat ribbon	
Operating Conditions (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative humidity	10% to 90%
	Maximum wet bulb temperature	86° F (30° C)
Certifications, Approvals	MMC-3 support, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B)	
Operating Systems Supported	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3	
Supplied Software (for Windows XP)	Roxio Cineplayer Movie Playback Roxio Digital Media Plus: Create or copy CDs and DVDs, including music and data CDs, and data DVDs Dantz Retrospect Express: Back up systems to CD, DVD, or tape media.	

16X DVD+/-RW, Dual-Layer, with LightScribe Direct Disc Labeling

Form Factor	5.25-inch, half-height, tray-load
Orientation	Horizontal or vertical
Interface	ATAPI/EIDE



Technical Specifications - Optical Devices

Dimensions (HxWxD)	5.9 x 1.7 x 7.9 in (15.0 x 4.4 x 20.0 cm)
Weight (maximum)	2.6 lb (1.2 kg)
Read Only Disc Parameters	Data Transfer Rates - Read
	DVD-ROM, DVD-video read - 5-16X (6750 - 21,600 KB/s CAV)
	DVD-video playback, DVD+R, DVD+RW, DVD-R, DVD-RW - 4-8X (5400 - 10,800 KB/s CAV)
	CD-audio playback - 8x (1200 KB/s CLV)
	Digital audio extraction (minimum) - 12X (1,800 KB/s CAV)
	CD-ROM, CD-R, CD-RW, CD-Audio read - 16-40X (2400 to 6000 KB/s CAV)
	Media and Formats - Read
	CD Media: stamped; CD-R; CD-RW (supports AM2) (LS, HS, US)
	CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)
	CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD, UDF (1.02 and 1.50)
	DVD Media: stamped (single and double layer); DVD+R; DVD+RW; DVD+R DL; DVD-R; DVD-RW
	DVD Capacities: 4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 14.1 GB (DVD-14), 17.0 GB (DVD-18), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R), 1.46 GB (DVD+R, 8cm), 1.46 GB (DVD+RW, 8cm)
	DVD Formats: DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0 (including multi-border); DVD-RW version 1.0 and 1.1; DVD+R version 1.3 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2

Technical Specifications - Optical Devices

Writeable Disc Parameters	Data Transfer Rates - Write	<p>CD-R write - 16-40X (2400-6000 KB/s CAV) CD-RW write - 4X (600 KB/s CLV) CD-RW write (high speed) - 10X (1500 KB/s CLV) CD-RW write (ultra high speed) - 16-24X (2400-3600 KB/s ZCLV) DVD+R - 6-16X (8100-21,600 KB/s CAV), 8x (10,800 KB/s ZCLV), 2.4-4x (3250-5400 KB/s CLV) DVD+R DL - 2.4 (3250 KB/s CLV) DVD+RW - 2.4-4X (3250-5400 KB/s CLV) DVD-R - 2-4X (2700-5400 KB/s CLV), 8X (10,800 KB/s ZCLV) DVD-RW - 2-4X (2700-5400 KB/s CLV)</p>
	Media and Formats - Write	<p>CD Media: CD-R (OBII Vol2.0 Rev 1.2), CD-RW (LS, HS, US) CD Capacities: 180 MB (mode 1, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute) CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD, UDF (1.02 and 1.50) DVD Media: DVD+R, DVD+R DL, DVD+RW, DVD-R, DVD-RW DVD Capacities: 4.7 GB (DVD-5), 8.54 GB (DVD-9), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.1), 4.7 GB (DVD+RW version 1.3), 4.7G (DVD+R version 1.2)), 1.46 GB (DVD+R, 8cm), 1.46 GB (DVD+RW, 8cm) DVD Formats: DVD-R version 1.0 and 2.0 (including multi-border); DVD-RW version 1.0 and 1.1; DVD+R version 1.3 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2</p>
	Write Methods	<p>Disc-at-once, session-at-once, track-at-once, incremental fixed and variable packet, multi-session</p>
LightScribe Direct Disc Labeling Parameters	Media Supported	<p>CD-R: LightScribe Version 1.0 DVD+R: LightScribe Version 1.0</p>
	Resolution	<p>Dots per inch: 600 Tracks per inch: 500-1600 (mode dependent)</p>
	Labeling Times	<p>Draft quality: < 20 min Normal quality: < 28 min Best quality: < 36 min</p>

Technical Specifications - Optical Devices

Access Times (typical reads, including settling)	Random DVD	< 130 ms (typical)
	Random CD	< 120 ms (typical)
	Full Stroke DVD	< 240 ms
	Full Stroke CD	< 200 ms
	Startup Time (single)	< 7 seconds (typical)
	Startup Time (multi-session)	< 30 seconds (typical)
	Stop Time (typical)	< 4 s
	Cache Buffer	2 MB
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s) (default on most HP xw series workstations)
	Power	Source
DC Power Requirement		5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p
DC Current		5 VDC (< 1000 mA typical, < 1600 mA maximum) 12 VDC (< 600 mA typical, < 1400 mA maximum)
Total Drive Power (standby mode)		< 2.5 Watt
Audio Output	Line-Out	0.7 VRMS
	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
Operating Conditions (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative humidity	10% to 90%
	Maximum wet bulb temperature	86° F (30° C)
Certifications, Approvals	MMC-4 compliant, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B), relevant parts of IEC 61000-4.	
Operating Systems Supported	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition	

Technical Specifications - Optical Devices

Supplied Software (for Windows XP)

Roxio Cineplayer Movie Playback

Roxio Digital Media Plus: Create or copy CDs and DVDs, including music and data CDs, and data DVDs

Roxio MyDVD for DVD authoring

Dantz Retrospect Express: Back up systems to CD, DVD, or tape media

NOTE: LightScribe Direct Disc Labeling is supported only on 32-bit Windows XP in the launch timeframe for the xw4300. Support for Windows XP

Professional x64 Edition is anticipated to be available some time after the launch, and will require software updates. There is no support for LightScribe

labeling under Linux. The drive will operate as a DVD writer under these other operating systems, but will not be available in software applications as

a LightScribe "printer".

NOTE: This DVD writer kit does not include any software for burning DVDs on Linux. DVD burning is supported with the 'growisofs' command. CD burning is supported with the 'cdrecord' command. Red Hat Enterprise Linux WS 3 distribution includes both 'cdrecord' and 'growisofs'. Red Hat Linux 8, 9.0 distributions only include 'cdrecord'. Therefore DVD burning is only supported on WS 3.

Technical Specifications - Graphics

ATI Entry 2D 64MB (PCI Express)	Dimensions (H x W)	6.6 x 2.7 in (16.77 x 6.89 cm)		
	Weight	4.2 oz (119 g)		
	Bus type	PCI Express (x16 lanes)		
	Maximum vertical refresh rate	85 Hz		
	Display max resolution	Required		
	Board configuration	Graphics chip	RADEON X300 SE PCI Express	
		Core clock	325 MHz	
		Memory clock	200 MHz	
		Frame buffer	64 MB DDR	
		Memory I/O	64 bit	
		Memory configuration	4 pcs 8Mx16 DDR	
		Memory type	64 MB DDR1	
		Operating temperature	50° to 122° F (10° to 50° C)	
		Operating systems support	Windows XP Professional, Windows XP Professional x64 Edition, Linux Xfree86.	
		Voltage	1.2 V and 1.8 V power rails used for PCI Express.	
		Core power	10 W (Max ASIC power) 18 W (Max Board power)	
		Board display options	VGA + TV VGA supports analog CRT or flat panel. TV Connector is a 7-pin mini-DIN (also allowing 4-pin S-Video without adaptor)	

NVIDIA Quadro NVS 280 (PCI)	Form factor	ATX	
	Graphic controller	Integrated Quadro 280 2-D graphics processor unit (GPU)	
	VGA controller	Integrated into the Quadro GPU	
	Bus type	PCI	
	RAMDAC	Dual 350 MHz	
	Memory	64 MB DDR with frame buffer and Texture storage	
	Connector	Single High-density Flex Connector	
	Dimensions	Low-profile, 2.586 x 6.6 in (6.57 x 16.76 cm)	
	Controller clock speed	275 MHz	
	Color planes	32-bit color buffer	
	Overlay planes	1 16-bit Video overlay plane	
	Maximum vertical refresh rate	120 Hz	
	Maximum pixel clock	350 MHz	
	Multi-monitor support	Dual analog or digital monitors	
	Single DVI support	Yes	
Dual DVI support	Yes		

Technical Specifications - Graphics

High-definition Video Processor (HDVP)	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
Available graphics drivers	Windows XP Professional, Windows XP Professional x64 Edition, Linux Xfree86. HP qualified drivers may be preloaded or available from the HP support web site: http://welcome.hp.com/country/us/eng/software_drivers.html .
Maximum resolution	2048 x 1536 analog 1600 x 1200 digital

NVIDIA Quadro NVS 280 Graphics Card (PCI-Express)	Form factor	ATX
	Graphics controller	Integrated Quadro 280 2-D graphics processor unit (GPU)
	VGA controller	Integrated into the Quadro GPU
	Bus type	PCI-Express x16 or PCI
	RAMDAC	Dual 350 MHz integrated
	Memory	64 MB 000 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	Single High-density Flex Connector
	Multi-monitor support	Dual integrated analog display controllers supporting up to two analog displays at 1920 x1200 @ 85Hz or two digital displays at 1600 x 1200 @ 60Hz
Additional product features	Controller clock speed	250 MHz
	Color planes	32-bit color buffer
	Overlay planes	1 16-bit Video overlay plane
	Maximum vertical refresh rate	120 Hz
	Maximum pixel clock	350 MHz
	Single DVI support	Yes
	Dual DVI support	Yes
	High-definition Video Processor (HDVP)	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
PCI-Express		Supports X16 PCI-E

Technical Specifications - Graphics

Available graphics drivers	Windows XP Professional, Windows XP Professional x64 Edition, (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html .
Maximum resolution	2048 x 1536 analog 1600 x 1200 digital

ATI FireGL V3100 Graphics Card (PCI Express)	Form factor	ATX
	Graphics controller	RV370
	Bus type	PCI-Express x16
	Memory	128MB 200MHz DDR unified frame buffer, Z-buffer and Texture storage
	Connectors	1 DVI-I analog/digital and 1 VGA analog monitor output
	Multi-monitor support	Dual integrated display controllers supporting up to 2048x1536 @ 85Hz on both displays
	RAMDAC	Dual 400 MHz integrated
	Architecture features	128-bit memory interface 128-bit IEEE floating-point precision 24-bits per RGBA color precision 4-bit sub-pixel precision 2 parallel geometry engines 4 parallel pixel pipelines 2x/4x/6x FSAA Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware accelerated occlusion culling Hardware accelerated clip planes
	Shading architecture	Smartshader™ technology Programmable pixel and vertex shaders 16 textures per pass Pixel shaders up to 160 instructions with 32-bit floating point precision for each RGBA component Multiple render target support Shadow volume rendering acceleration High precision 10-bit per channel frame buffer support
	Supported graphics APIs	OpenGL 1.5 DirectX 9.0
	Available graphics drivers	Windows XP Professional, Windows XP Professional x64 Edition, Linux Xfree86HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html .
	Maximum resolution	DVI-I output – drives digital display at resolutions up to 1600x1200 Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 85Hz each

Technical Specifications - Graphics

<p>NVIDIA Quadro FX 540 PCI-Express Graphics Card</p>	<p>Form factor</p> <p>Graphics controller</p> <p>Bus type</p> <p>RAMDAC</p> <p>Memory</p> <p>Connectors</p> <p>Multi-monitor support</p> <p>Additional product features</p> <p>Shading architecture</p> <p>Supported graphics APIs</p> <p>Available graphics drivers</p> <p>Maximum resolution</p>	<p>ATX, 4.376" x 7.0"</p> <p>Single slot</p> <p>NVIDIA NV43GL</p> <p>PCI-Express x16, <75W power consumption</p> <p>Dual 400 MHz integrated</p> <p>128 MB 275 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage 8.8 GB/sec graphics memory bandwidth</p> <p>DVI-I + VGA + 10-pin HDTV Out (HD cable purchased separately)</p> <p>Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 75Hz, one digital display at 1600x1200 @ 60Hz.</p> <p>128 KB BIOS 3.3V Flash ROM reprogrammable by SW Hardware accelerated Overlay Planes Hardware accelerated two-sided lighting Hardware accelerated antialiased points and lines 3D Volumetric Texture support Hardware accelerated Occlusion Culling Compliant with Microsoft/Intel PC2001 Workstation requirements Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications DDC2B+ Monitor support on all OS platforms ACPI Version 1.0b Power Management support (all modes)</p> <p>Fully programmable GPU (OpenGL1.5/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution Optimized compilers for Cg, OpenGL shading language, and Microsoft HLSL</p> <p>OpenGL 1.5 ICD with immediate mode support for all OGL primitive types DirectX 9.0c</p> <p>HP-tested: Windows XP Professional, Windows XP Professional x64 Edition, Linux Xfree86. HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html.</p> <p>DVI-I output – drives digital display at resolutions up to 1600x1200 @ 60Hz Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 75Hz each</p>
---	--	---

Technical Specifications - Graphics

<p>NVIDIA Quadro FX 1400 Form factor PCI-Express Graphics Controller</p>	<p>ATX, 4.376 x 8.5 in (11.12 x 21.59 cm) Single slot Graphics controller NVIDIA NV41GL Bus type PCI-Express x16, <75W power consumption RAMDAC Dual 400 MHz integrated Memory 128 MB 300 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage 19.2 GB/s graphics memory bandwidth Connectors 2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output Multi-monitor support Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays. Additional product features 128 KB BIOS 3.3V Flash ROM reprogrammable by SW Hardware accelerated Overlay Planes Hardware accelerated two-sided lighting Hardware accelerated antialiased points and lines Quad-buffered Stereo 3D Volumetric Texture support Hardware accelerated Occlusion Culling Scalable Link Interface (SLI) technology Compliant with Microsoft/Intel PC2001 Workstation requirements Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications DDC2B+ Monitor support on all OS platforms ACPI Version 1.0b Power Management support (all modes)</p>
<p>Shading architecture</p>	<p>Fully programmable GPU (OpenGL1.5/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution Optimized compilers for Cg, OpenGL shading language, and Microsoft HLSL</p>
<p>Supported graphics APIs</p>	<p>OpenGL 1.5 ICD with immediate mode support for all OGL primitive types DirectX 9.0c</p>
<p>Available graphics drivers</p>	<p>HP-tested: Windows XP Professional, Windows XP Professional x64 Edition, Linux Xfree86. HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html.</p>
<p>Maximum resolution</p>	<p>Dual DVI-I output – drives dual digital displays at resolutions up to 1900x1200 @ 60Hz Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 85Hz each</p>

Technical Specifications - Graphics

ATI FireGL V5100 PCI-Express Graphics Controller	Form factor	ATX
	Graphics controller	RV423
	Bus type	PCI-Express x16
	Memory	128 MB 350MHz DDR unified frame buffer, Z-buffer and Texture storage
	Connectors	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	Multi-monitor support	Dual integrated display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays.
	RAMDAC	Dual 400 MHz integrated
	Architecture features	256-bit memory interface 128-bit IEEE floating-point precision 24-bits per RGBA color precision 8-bit sub-pixel precision 6 parallel geometry engines 12 parallel pixel pipelines 2x/4x/6x FSAA Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware accelerated occlusion culling Hardware accelerated clip planes Quad-buffered stereo
	Shading architecture	Smartshader™ technology Programmable pixel and vertex shaders 16 textures per pass Pixel shaders up to 160 instructions with 32-bit floating point precision for each RGBA component Multiple render target support Shadow volume rendering acceleration High precision 10-bit per channel frame buffer support
	Supported graphics APIs	OpenGL 1.5 DirectX 9.0
	Available graphics drivers	HP-tested: Windows XP Professional, Windows XP Professional x64 Edition, Linux Xfree86 HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html .
	Maximum resolution	DVI-I output – drives digital displays at resolutions up to 1600x1200 Internal 400MHz RAMDAC – drives dual analog displays up to 2048x1536 @ 85Hz each

Technical Specifications - Graphics

NVIDIA Quadro FX 3400	Form factor	ATX
PCI-Express Graphics Controller	Graphics controller	NVIDIA NV45GL-V
	Bus type	PCI-Express x16
	RAMDAC	Dual 400 MHz integrated
	Memory	256 MB 450 MHz GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	2 DVI-I (dual-link) analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	Multi-monitor support	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays.
	Additional product features	128 KB BIOS 3.3V Flash ROM reprogrammable by SW Hardware Overlay Planes Hardware two-sided lighting Hardware accelerated antialiased points and lines Quad-buffered Stereo Diamond exit rule line rasterization for improved line quality 3D Texture support Occlusion Culling Dual Link DVI enabling driving digital displays up to 2048x1536 Compliant with Microsoft/Intel PC2001 Workstation requirements Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications DDC2B+ Monitor support on all OS platforms ACPI Version 1.0b Power Management support (all modes) Programmable Vertex and Pixel Shader 3.0
	PCI-Express	Supports X16 PCI-E or 16 lane PCI-Express connector 350 MHz engine clock rate
	NV45GL-V GPU featuring	350 MHz memory clock rate 256-bit memory interface VGA controller nfiniteFX II programmable vertex and pixel shader technology
	Supported graphics APIs	OpenGL 1.5 ICD with immediate mode support for all OGL primitive types DirectX 8, 9
	Available graphics drivers	HP-tested: Windows XP Professional, Windows XP Professional x64 Edition, Linux Xfree86 HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html .

Technical Specifications - Monitors

HP L1755 Flat Panel Monitor	Panel	Type	Active matrix, thin film transistor (TFT)	
		Viewable Image Area (diagonal)	17 in (43.2 cm) maximum viewable	
		Screen Opening (WxH)	13.4 x 10.7 in (33.9 x 27.2 cm)	
		Viewing Angle (typical)	176 degrees horizontal/176 degrees vertical (10:1 minimum contrast ratio)	
		Brightness (typical)	Up to 250 nits (cd/m ²)	
		Contrast Ratio (typical)	Up to 1000:1 (typical)	
		Response Rate (typical)	25 ms (typical rise + fall)	
		Pixel Pitch	0.264 mm	
		Color Depth Support	16.7 million colors	
		Plug and Play	Yes (supports VESA DDC2B; PC2001 compliant)	
Video/Other Inputs		Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)	
		Input Signal	Two connectors: one 15-pin mini D-sub analog VGA; and one DVI-I (VGA analog or digital)	
		Input Impedance	75 ohms ± 2%	
		Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)	
		Video Cable	VGA to VGA, DVI-D to DVI-D, and DVI-I to VGA	
		Video Cable Length	78 in (2.0 m)	
	Signal Interface/ Performance		Horizontal Frequency	30 to 82 kHz
			Vertical Frequency	56 to 75 Hz
			Native Resolution	1280 x 1024 @ 60 Hz analog 1280 x 1024 @ 60 Hz digital
			Maximum Resolution (Analog)	1280 x 1024 @ 75 Hz analog
		Maximum Resolution (Digital)	1280 x 1024 @ 75 Hz digital	
		Preset VESA Graphic Modes (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz, 72 Hz, 75 Hz 1024 x 768 @ 60 Hz, 70 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz	
		Preset MAC Mode	832 x 624 @ 75 Hz 1152 x 870 @ 75 Hz	
		Preset VGA Mode	640 x 480 @ 60 Hz, 72 Hz	
		Preset SUN Mode	1152 x 900 @ 76 Hz	
		Fail Safe Mode	Yes (limits out of range signal messages)	
	Maximum Pixel Clock Speed	140 MHz		
	User Programmable Modes	Yes, 15		
	Anti-Glare	Yes		

Technical Specifications - Monitors

	Anti-Static	Yes	
	AssetControl	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)	
	Default Color Temperature	Yes (6500k, 9300k, SRGB, Custom User)	
On Screen Display (OSD) Controls	Buttons or Switches	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch	
	Languages	English, Spanish, French, German, Italian, Japanese, Simplified Chinese	
	User Controls	Size and positioning, contrast, brightness, clock, clock phase, selectable color temperature, serial number, mode displayed, sleep timer, input selection, factory reset, individual color contrast, full-screen resolution	
Power	Power Supply	Auto-ranging, 90 to 265 VAC; internal power supply	
	Input Power	100 ~ 240 VAC	
	Nominal Current	1.5 A maximum	
	Frequency	50 ~ 60 Hz	
	Average	33 watts when displaying standard office software	
	Typical Power Consumption	< 40 watts	
	Maximum	< 60 watts	
	Power Saving Off Mode	< 2 W	
		0 watts (when master power switch is in the off position)	
		70 in (1.8 m); non-captive	
Mechanical	Power Cable Length		
	Dimensions (H x W x D)	Unpacked with stand 16.1 (minimum) to 21.2 (maximum) x 14.4 x 8.3 in (40.9 (minimum) to 42.2 (maximum) x 36.5 x 21.1 cm)	
		Base Area (Footprint D x W) 8.3 x 12.2 in (21.1 x 30.9 cm)	
		Panel only (without stand) (H x W x D) 11.8 x 14.4 x 2.9 in (30.1 x 40.9 x 7.3 cm)	
	Weight	Unpacked with stand	14.7 lb (6.7 kg)
		Unpacked without stand	8.1 lb (3.7 kg)
		Packaged	20.2 lb (9.2 kg)
	Bezel Width	13 mm left and right, 14 mm top, and 15 mm bottom	
	Tilt Range	-5° to +35°	
	Swivel Range	± 50° horizontal swivel	
Height Adjustable	Yes (5.1 in/13 cm adjustment range)		

Technical Specifications - Monitors

	Pivot Rotation	Yes, 90 °
	Base	Ships detached and is removable after installation
Environmental	Temperature – Operating	41° to 95° F (5° to 35° C)
	Temperature – Non-operating	-4° to 140° F (-20° to 60° C)
	Humidity – Operating	20% to 80%
	Humidity – Non-operating	5% to 95%
	Altitude – Operating	0 to 13,000 ft (0 to 4,000 m)
	Altitude – Non-operating	0 to 40,000 ft (0 to 12,192 m)
Options	HP Desktop Access Center – Part number: DK985A	Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions. Sold separately. For more information, refer to the HP Desktop Access Center QuickSpec document.
	HP Flat Panel Speaker Bar – Part number: PF804AA	Powered directly by the monitor, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec document.
	HP Compaq 7000 Series Ultra-slim Desktop Integrated Work Center Stand – Part number: DL641B	Allows mounting of a 15-, 17- or 19-inch HP flat panel monitor and an HP Compaq dc7100 Ultra-slim Desktop PC on a single stand for the convenience of an "all-in-one" form factor. Sold separately. For more information, refer to this product's QuickSpec document
Other	Accessories Included	VGA to VGA cable, DVI-D to DVI-D cable, DVI-I to VGA cable, USB cable, user CD-ROM with Pivot Pro software
	Software	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	Software	HP Display LiteSaver feature lets you schedule Sleep mode at preset times to help protect the display against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.

Technical Specifications - Monitors

	User Guide Languages	English, Latin America Spanish, Brazilian Portuguese, Danish, Dutch, Finnish, French, German, Italian, Norwegian, Swedish, Greek, Polish, Russian, Slovenian, Turkish, Simplified Chinese, Traditional Chinese, Korean, and Japanese
	Warranty Languages	English, Canadian French, Latin America Spanish, Brazilian Portuguese, Danish, Dutch, Finnish, French, German, Italian, Norwegian, Spanish, Swedish, Bahasa Indonesian, Simplified Chinese, Traditional Chinese, and Korean
	Color	Carbonite, two-tone carbonite and silver (EMEA only)
	VESA Mounting	Yes (swing arm/wall mount not included); base must be removed for mounting options)
	VESA External Mounting	Yes (standard 4 hole pattern, 100 mm)
	Kensington Lock-ready	Yes
Certification and Compliance		Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCC Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification
Compatibility		VESA Video Signal Standard (VSI) Compliant video cards have been tested and proven compatible for use with the HP L1755 Flat Panel Monitor. Recommended for use with HP products.
Service and Warranty		Limited three-year parts and repair labor, service provider labor, and on-site service. Next business day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

HP L1955 Flat Panel Monitor	Panel	Type	Active matrix, thin film transistor (TFT)
		Viewable Image Area	19 in (48.25 cm) maximum viewable (diagonal)
		Screen Opening (WxH)	14.9 x 12.0 in (38.0 x 30.5 cm)
		Viewing Angle (typical)	176 degrees horizontal/176 degrees vertical (10:1 minimum contrast ratio)
		Brightness (typical)	Up to 250 nits (cd/m ²)
		Contrast Ratio (typical)	Up to 1000:1 (typical)
		Response Rate (typical)	<16 ms (typical rise + fall)
		Pixel Pitch	0.294 mm
		Color Depth Support	16.7 million colors

Technical Specifications - Monitors

Video/Other Inputs	Plug and Play	Yes (supports VESA DDC2B; PC2001 compliant)	
	Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)	
	Input Signal	Two connectors: one 15-pin mini D-sub analog VGA; and one DVI-I (VGA analog or digital)	
	Input Impedance	75 ohms \pm 2%	
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)	
	Signal Interface/ Performance	Video Cable	VGA to VGA, DVI-D to DVI-D, and DVI-I to VGA
		Video Cable Length	78 in (2.0 m)
		Horizontal Frequency	30 to 82 kHz
		Vertical Frequency	56 to 75 Hz
		Native Resolution	1280 x 1024 @ 75 Hz analog 1280 x 1024 @ 60 Hz digital
		Maximum Resolution (Analog)	1280 x 1024 @ 75 Hz analog
		Maximum Resolution (Digital)	1280 x 1024 @ 75 Hz digital
		Preset VESA Graphic Modes (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz, 72 Hz, 75 Hz 1024 x 768 @ 60 Hz, 70 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz
		Preset MAC Mode	832 x 624 @ 75 Hz 1152 x 870 @ 75 Hz
Preset VGA Mode		640 x 480 @ 60 Hz, 72 Hz	
Preset SUN Mode		1152 x 900 @ 76 Hz	
Fail Safe Mode		Yes (limits out of range signal messages)	
Maximum Pixel Clock Speed		140 MHz	
On Screen Display (OSD) Controls		User Programmable Modes	Yes, 15
	Anti-Glare	Yes	
	Anti-Static	Yes	
	AssetControl	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)	
	Default Color Temperature	Yes (6500k, 9300k, SRGB, Custom User)	
	Buttons or Switches	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch	
	Languages	English, Spanish, French, German, Italian, Japanese, Simplified Chinese	
	User Controls	Size and Positioning Contrast	

		Brightness	
		Clock, Clock Phase	
		Selectable Color Temperature	
		Serial Number	
		Mode Displayed	
		Sleep Timer	
		Input Selection	
		Factory Reset	
		Individual Color Contrast	
		Full-screen Resolution	
Power	Power Supply	Auto-ranging, 90 to 265 VAC; internal power supply	
	Input Power	100 ~ 240 VAC	
	Nominal Current	1.5 A maximum	
	Frequency	50 ~ 60 Hz	
	Average	33 watts when displaying standard office software	
	Typical Power Consumption	< 40 watts	
	Maximum	< 60 watts	
	Power Saving Off Mode	< 2 watts	
		0 watts (when master power switch is in the off position)	
	Power Cable Length	70 in (1.8 m); non-captive	
Mechanical	Dimensions (H x W x D)	Unpacked with stand	16.8 (minimum) to 22.3 (maximum) x 15.9 x 8.3 in (42.7 (minimum) to 56.6 (maximum) x 40.4 x 21.1 cm)
		Base Area (Footprint D x W)	8.3 x 12.2 in (21.1 x 30.9 cm)
		Panel only (without stand) (H x W x D)	13.2 x 15.9 x 3.1 in (33.5 x 40.4 x 7.9 cm)
	Weight	Unpacked with stand	16.5 lb (7.5 kg)
		Unpacked without stand	10.5 lb (4.75 kg)
		Packaged	23.5 lb (10.7 kg)
	Bezel Width	13 mm left and right, 14 mm top, and 15 mm bottom	
	Tilt Range	-5° to +35°	
	Swivel Range	± 50° horizontal swivel	
	Height Adjustable	Yes (5.1 in/13 cm adjustment range)	
	Pivot Rotation	Yes, 90 °	
	Base	Ships detached and is removable after installation	

Technical Specifications - Monitors

Environmental	Temperature – Operating	41° to 95° F (5° to 35° C)
	Temperature – Non-operating	-4° to 140° F (-20° to 60° C)
	Humidity – Operating	20% to 80%
	Humidity – Non-operating	5% to 95%
	Altitude – Operating	0 to 13,000 ft (0 to 4,000 m)
	Altitude – Non-operating	0 to 40,000 ft (0 to 12,192 m)
Options	Desktop Access Center	Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions. Sold separately; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.
	HP Flat Panel Speaker Bar	Powered directly by the monitor, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features dual speakers with full sound range and external jack for headphones. Sold separately, part number PF804AA. For more information, refer to the HP Flat Panel Speaker Bar QuickSpecs.
Other	Accessories Included	VGA to VGA cable, DVI-D to DVI-D cable, DVI-I to VGA cable, USB cable, user CD-ROM with Pivot Pro software
	Software	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	Software	HP Display LiteSaver feature lets you schedule Sleep mode at preset times to help protect the display against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.
	User Guide Languages	English
	Warranty Languages	English
	Color	Carbonite, two-tone carbonite and silver (EMEA only)
	VESA Mounting	Yes (swing arm/wall mount not included); base must be removed for mounting options)
VESA External Mounting	Yes (standard 4 hole pattern, 100 mm)	
Kensington Lock-ready	Yes	

Technical Specifications - Monitors

Certification and Compliance	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft® Windows® Certification
Compatibility	VESA Video Signal Standard (VSI) Compliant video cards have been tested and proven compatible for use with the HP L1955 Flat Panel Monitor. Recommended for use with HP products.
Service and Warranty	Limited three-year parts and repair labor, service provider labor, and on-site service. Next Business Day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

HP Flat Panel Monitor L2035	Panel	Type	20-inch Active Matrix TFT (thin film transistor)
		Viewable Image Area (diagonal)	20.1 in (51 cm)
		Screen Opening (W x H)	16.2 x 12.17 in (41.1 x 30.9 cm)
		Viewing Angle (typical)*	Up to 170° H/170° V (10:1 minimum contrast ratio)
		Brightness (typical*)	Up to 250 nits (cd/m ²)
		Contrast Ratio (typical)*	Up to 400:1
		Response Rate (typical)*	16 ms (typical, rise + fall)
		Pixel Pitch	0.255 mm
		Color Depth Support	16.7 million colors
On Screen Display (OSD) Controls	Buttons or Switches	PiP (Picture in Picture), Input select, auto adjust, OSD up, OSD down, OSD menu select, power	
	Languages	English, French, German, Spanish, Italian	
	User Controls	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, video picture-in-picture (size and position), input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset	

Technical Specifications - Monitors

Signal Interface/ Performance	Horizontal Frequency	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	Vertical Frequency	48 to 85 Hz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	Graphics Controller	Pixelworks PW171	
	Native Resolution	1600 x 1200 @ 60 Hz (recommended)	
	Preset VESA Graphic Modes (non-interlaced)	1600 x 1200 @ 60 Hz, 75 Hz (VGA input)	
		1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz	
		1280 x 960 @ 60 Hz	
		1152 x 900 @ 66 Hz	
		1024 x 768 @ 60 Hz, 75 Hz, 85 Hz	
		800 x 600 @ 60 Hz, 85 Hz	
		640 x 480 @ 60 Hz, 75 Hz, 85 Hz	
		Text Mode	720 x 400 @ 70 Hz
		Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
		Sun Mode	1152 x 900 @ 66 Hz
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)	
	User Programmable Modes	Yes, 10	
	Anti-Glare	Yes	
	Anti-Static	Yes	
	Default Color Temperature	6500 K	
	Video Input	Plug and Play	Yes
Input Signal		Four connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, and one s-video	
Input Impedance		75 ohms \pm 10%	
Sync Input		Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
Video Cable		VGA to VGA; VGA to DVI-I; DVI-D to DVI-I	
Power	Video Cable Length	5.9 ft (1.8 m)	
	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz	
	Frequency	47.5 to 63 Hz	
	Maximum	< 75 W	
	Power Saving	< 5 W	
	Power Cable Length	5.9 ft (1.8 m)	

Technical Specifications - Monitors

Mechanical	Dimensions (H x W x D)	Unpacked with stand	17.36 to 20.9 x 17.8 x 8.27 in (44.1 to 53.1 x 45.2 x 21.0 cm)
		Unpacked without stand (head only)	14.29 x 17.8 x 3.19 in (36.3 x 45.2 x 8.1 cm)
		Packaged	11.5 x 21.9 x 23.9 in (29.2 x 55.6 x 60.6 cm)
	Weight	Unpacked	With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)
		Packaged	26.9 lb (12.2 kg)
		Tilt Range	-5° to + 25° vertical
	Environmental	Swivel Range	-35° to + 35°
		Height Adjustable	Yes, range 3.54 in (9.0 cm)
		Pivot Rotation	Yes
		Base	Attached
Temperature – Operating		46° to 95° F (10° to 35° C)	
Temperature – Non-operating		6° to 140° F (-10° to 60° C)	
Humidity – Operating		20% to 80% non-condensing	
Humidity – Non-operating		5% to 85%	
Options	Altitude – Operating	+ 12,000 ft (+3,657.6 m)	
	Altitude – Non-operating	+ 40,000 ft (+12,192 m)	
	HP Desktop Access Center	Sold separately, the HP Desktop Access Center features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.	

Technical Specifications - Monitors

Other	Accessories Included	VGA to VGA cable – connects the graphic card's VGA analog connector to the monitor's input #1 (VGA analog) connector VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector
	User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Warranty Languages	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	Color	Carbonite/Silver
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
	Kensington Lock-Ready	Yes
Certification and Compliance		Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, *Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Windows Certification (Microsoft® Windows® 98, Microsoft Windows 2000, and Microsoft Windows XP) <i>* Energy Star Compliant available summer 2004.</i>
Service and Warranty		Limited three years parts, labor, and on-site service, including backlight. Availability varies by region. Certain restrictions and exclusions apply. Consult HP Customer Service for details.

HP Flat Panel Monitor L2335	Panel	Type	23-inch Active Matrix TFT (thin film transistor)
		Viewable Image Area (diagonal)	23 in (58.4 cm)
		Screen Opening (W x H)	19.53 x 12.24 in (49.6 x 31.1 cm)
		Viewing Angle (typical)*	Up to 170° H/170° V (10:1 minimum contrast ratio)
		Brightness (typical)*	Up to 250 nits (cd/m ²)
		Contrast Ratio (typical)*	Up to 500:1
		Response Rate (typical)*	16 ms (typical, rise + fall)
		Pixel Pitch	0.258 mm
		Color Depth Support	16.7 million colors

* All specifications are provided by the component manufacturers. Performance specifications represent the highest specification of all HP's component manufacturers' typical level specifications for performance. Actual performance may vary either higher or lower.

On Screen Display (OSD) Controls	Buttons or Switches	PiP (Picture in Picture), Input Select, Auto Adjust, OSD Up, OSD Down, OSD Menu Select, Power	
	Languages	English, French, German, Spanish, Italian	
	User Controls	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, video picture-in-picture (size and position), input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset	
Signal Interface/ Performance	Horizontal Frequency	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	Vertical Frequency	48 to 85 Hz (VGA and DVI input)	
	Graphics Controller	Pixelworks PW172	
	Native Resolution	1920 x 1200 @ 60 Hz (recommended)	
	Preset VESA Graphic Modes (non-interlaced)		1920 x 1200 @ 60Hz
			1600 x 1200 @ 60 Hz, 75 Hz
			1280 x 1024 @ 60 Hz, 75Hz, 85 Hz
			1280 x 960 @ 60 Hz
			1152 x 900 @ 66 Hz
			1024 x 768 @ 60 Hz, 75 Hz, 85 Hz
			800 x 600 @ 60 Hz, 75Hz
			640 x 480 @ 60 Hz, 75 Hz
		Text Mode	720 x 400 @ 70 Hz
		Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
		Sun Mode	1152 x 900 @ 66 Hz
		Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)
	User Programmable Modes	Yes, 10	
	Anti-Glare	Yes	
	Anti-Static	Yes	
	Default Color Temperature	6500 K	
Video Input	Plug and Play	Yes	
	Input Signal	Five connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, one s-video, component video	
	Input Impedance	75 ohms \pm 10%	
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	

Technical Specifications - Monitors

	Video Cable	VGA to VGA; VGA to DVI-I; DVI-D to DVI-I						
	Video Cable Length	5.9 ft (1.8 m)						
Power	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz						
	Frequency	47.5 to 63 Hz						
	Maximum	< 100 W						
	Power Saving	< 5 W						
	Power Cable Length	5.9 ft (1.8 m)						
Mechanical	Dimensions (H x W x D)	<table border="0"> <tbody> <tr> <td>Unpacked</td> <td>17.36 (min) to 20.9 (max) x 21.46 x 8.27 in (44.1 (min) to 53.1 (max) x 54.5 x 21.0 cm)</td> </tr> <tr> <td>Unpacked without stand (head only)</td> <td>14.57 x 21.46 x 3.35 in (37.0 x 54.5 x 8.5 cm)</td> </tr> <tr> <td>Packaged</td> <td>11.5 x 25.75 x 23.86 in (29.2 x 65.4 x 60.6 cm)</td> </tr> </tbody> </table>	Unpacked	17.36 (min) to 20.9 (max) x 21.46 x 8.27 in (44.1 (min) to 53.1 (max) x 54.5 x 21.0 cm)	Unpacked without stand (head only)	14.57 x 21.46 x 3.35 in (37.0 x 54.5 x 8.5 cm)	Packaged	11.5 x 25.75 x 23.86 in (29.2 x 65.4 x 60.6 cm)
Unpacked	17.36 (min) to 20.9 (max) x 21.46 x 8.27 in (44.1 (min) to 53.1 (max) x 54.5 x 21.0 cm)							
Unpacked without stand (head only)	14.57 x 21.46 x 3.35 in (37.0 x 54.5 x 8.5 cm)							
Packaged	11.5 x 25.75 x 23.86 in (29.2 x 65.4 x 60.6 cm)							
	Weight	<table border="0"> <tbody> <tr> <td>Unpacked</td> <td>22.27 lb (10.1 kg)</td> </tr> <tr> <td>Packaged</td> <td>30.87 lb (14.0 kg)</td> </tr> </tbody> </table>	Unpacked	22.27 lb (10.1 kg)	Packaged	30.87 lb (14.0 kg)		
Unpacked	22.27 lb (10.1 kg)							
Packaged	30.87 lb (14.0 kg)							
	Tilt Range	-5° to + 25° vertical						
	Swivel Range	-35° to + 35°						
	Height Adjustable	Yes, range 3.54 in (9.0 cm)						
	Pivot Rotation	Yes						
	Base	Attached						
Environmental	Temperature – Operating	46° to 95° F (10° to 35° C)						
	Temperature – Non-operating	6° to 140° F (-10° to 60° C)						
	Humidity – Operating	20% to 80% non-condensing						
	Humidity – Non-operating	5% to 85%						
	Altitude – Operating	+12,000 ft (+3,657.6 m)						
	Altitude – Non-operating	+40,000 ft (+12,192 m)						
Options	HP Desktop Access Center	Sold separately, the HP Desktop Access Center Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.						

Technical Specifications - Monitors

Other	Accessories Included	<p>VGA to VGA cable – connects the graphic card's VGA analog connector to the monitor's input #1 (VGA analog) connector</p> <p>VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector</p> <p>DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector</p>
	User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Warranty Languages	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	Color	Carbonite/silver
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
	Kensington Lock-Ready	Yes
Certification and Compliance		<p>Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, *Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Windows Certification (Microsoft® Windows® 98, Microsoft Windows 2000, and Microsoft Windows XP).</p> <p>* Energy Star Compliant available summer 2004.</p>
Service and Warranty		Limited three years parts, labor, and on-site service, including backlight. Availability varies by region. Certain restrictions and exclusions apply. Consult HP Customer Service for details.

© Copyright 2005 Hewlett-Packard Development Company, L.P.

All rights reserved. HP and the HP logo are trademarks of the Hewlett Packard Company in the U.S. and/or other countries. Microsoft and Windows are US registered trademarks of Microsoft Corporation. Intel and Xeon are US registered trademarks or trademarks of Intel Corporation.

HP shall not be liable for technical or editorial errors or omissions contained herein. The information is provided as is without warranty of any kind and is subject to change without notice. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty.