


## Overview

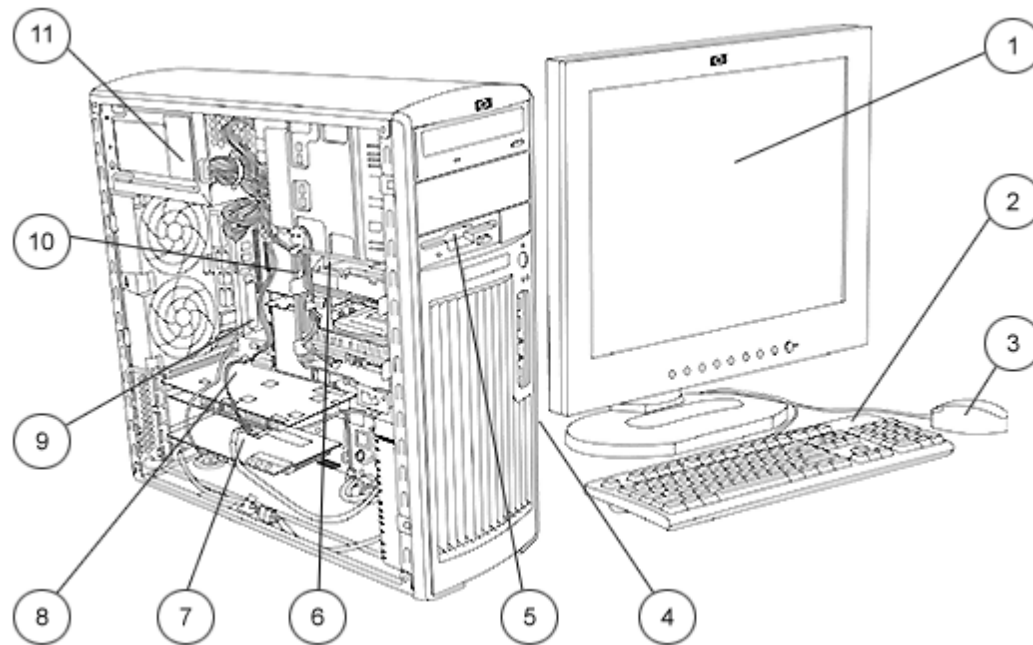

1. Monitor (sold separately)
2. 2004 Standard Keyboard
3. 2-Button Scroll Mouse
4. Front IO: 2 USB 2.0, IEEE-1394 (requires optional PCI card to enable), headphone and microphone
5. 3.5" external bay for optional diskette drive or other 3.5" device
6. 2 internal 3.5" bays, 2 external 5.25" bays
7. 4 PCI, 1 PCI Express 8x prime slots
8. 1 PCI Express x16 Graphics Bus
9. 6 USB 2.0, 1 standard serial port, 1 parallel port, 2 PS/2, 1 RJ-45, audio in/out
10. Dual 64-bit Intel® Xeon™ processors
11. 500 watt power supply

## At A Glance

- 64-bit Intel® Xeon™ processors
- Choice of operating systems: Microsoft Windows XP Professional, XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3, HP Linux Installer Kit (see <http://www.hp.com/workstations/software/linux/> for details)
- Up to 8 GB of DDR-2 memory
- PCI-Express I/O and graphics
- Integrated Broadcom NetXtreme Gigabit ethernet
- 800 MHz processor front side bus support
- Intel Hyper-Threading technology support
- SATA and Ultra 320 SCSI drives
- Digital AC97 integrated audio with internal speaker
- Pre-loaded Manageability tools
- Energy Star compliance with energy-saving features
- Protected by HP Services, including a 3-3-3 standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.

## Standard Features - Custom Components

### Processor and Speed – 64-bit Intel Xeon Processor with 800 MHz Front Side Bus

One of the following

- 2.8 GHz (1 MB L2 cache)
- 3.0 GHz (1 MB L2 cache)
- 3.0 GHz (2 MB L2 cache)
- 3.2 GHz (1 MB L2 cache)
- 3.2 GHz (2 MB L2 cache)
- 3.4 GHz (1 MB L2 cache)
- 3.4 GHz (2 MB L2 cache)
- 3.6 GHz (1 MB L2 cache)
- 3.6 GHz (2 MB L2 cache)

### 2nd 64-bit Intel Xeon Processor with 800 MHz Front Side Bus

- 2.8 GHz (1 MB L2 cache)
- 3.0 GHz (1 MB L2 cache)
- 3.0 GHz (2 MB L2 cache)
- 3.2 GHz (1 MB L2 cache)
- 3.2 GHz (2 MB L2 cache)
- 3.4 GHz (1 MB L2 cache)
- 3.4 GHz (2 MB L2 cache)
- 3.6 GHz (1 MB L2 cache)
- 3.6 GHz (2 MB L2 cache)

### Operating System – Microsoft Windows XP Professional

One of the following

Microsoft Windows XP Professional x64 Edition (<http://www.hp.com/workstations/pws/windowsxp64/>)

Red Hat Enterprise Linux Workstation 3 64-bit version (Update 2 in 32- and 64-bit available as aftermarket option)

HP Installer Kit for Linux (includes drivers for both 32-bit & 64-bit OS versions)

**NOTE:** Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix ([http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)) for details, and to the Linux User Manual ([http://www.hp.com/support/linux\\_user\\_manual](http://www.hp.com/support/linux_user_manual)) for tips on user-enablement of the IEEE 1394 Card.

### 1st Hard Disk Drive –

One of the following

	Windows XP	Red Hat Linux
40 GB 7200 rpm Serial ATA drive (2 MB cache)	32-Bit, 64-Bit	WS3
80 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3
160 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3
250 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3
400 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3
74 GB 10K rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3
73 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3
146 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3
300 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3
36 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3
73 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3
146 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3

## Standard Features - Custom Components

<b>2nd Hard Disk Drive –</b> One of the following	2nd hard drive, 40 GB 7200 rpm Serial ATA drive (2 MB cache)	32-Bit, 64-Bit	WS3
	2nd hard drive, 80 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3
	2nd hard drive, 160 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3
	2nd hard drive, 250 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3
	2nd hard drive, 400 GB 7200 rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3
	2nd hard drive, 74 GB 10K rpm Serial ATA drive (8 MB cache)	32-Bit, 64-Bit	WS3
	2nd hard drive, 73 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	2nd hard drive, 146 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	2nd hard drive, 300 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	2nd hard drive, 36 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	2nd hard drive, 73 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	2nd hard drive, 146 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3

<b>3rd Hard Disk Drive –</b> One of the following	3rd hard drive, 73 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	3rd hard drive, 146 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	3rd hard drive, 300 GB 10K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	3rd hard drive, 36 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	3rd hard drive, 73 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	3rd hard drive, 146 GB 15K Ultra320 SCSI drive	32-Bit, 64-Bit	7.2, 7.3, WS3

<b>Factory Integrated RAID</b>	RAID 0 Configuration – Striped Array	32-Bit
	RAID 1 Configuration – Mirrored Array	32-Bit
<b>NOTE:</b> Requires 2 identical hard drives (speeds, capacity, interface)		

<b>Drive controllers</b>	Integrated serial ATA controller
	Optional Ultra 320 SCSI controller (required if HDs are SCSI) - basic
	Optional Ultra 320 SCSI controller (required if HDs are SCSI) - advanced, with RAID support and external connector

### Standard Features - Custom Components

Memory -		Windows XP	Red Hat Linux
One of the following	256 MB DDR-2 PC2-3200 (400 MHz) ECC Registered (1 x 256 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3
	512 MB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 256 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3
	1 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 512 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3
	2 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 1 GB)	32-Bit, 64-Bit	7.2, 7.3, WS3
	2 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (4 x 512 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3
	3 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 1 GB + 2 x 512 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3
	4 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 2 GB)	32-Bit, 64-Bit	7.2, 7.3, WS3
	4 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (4 x 1 GB)	32-Bit, 64-Bit	7.2, 7.3, WS3
	6 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (2 x 2 GB + 2 x 1 GB)	64-Bit	7.2, 7.3, WS3
	8 GB DDR-2 PC2-3200 (400 MHz) ECC Registered (4 x 2 GB)	64-Bit	7.2, 7.3, WS3

Removable Storage		Windows XP	Red Hat Linux
	1.44-MB Diskette Drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	48X CD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	48X/32X/48X CD-RW Drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	16X/40X DVD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	48X/32X/48X/16X Combo CD-RW/DVD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	16X DVD+/-RW, Dual-Layer	32-Bit, 64-Bit	7.2, 7.3, WS3
	16X DVD+/-RW, Dual-Layer LightScribe	32-Bit	

2nd Removable Storage		Windows XP	Red Hat Linux
	48X/32X/48X CD-RW Drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	16X/40X DVD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	48X/32X/48X/16X Combo CD-RW/DVD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3
	16X DVD+/-RW, Dual-Layer	32-Bit, 64-Bit	7.2, 7.3, WS3
	16X DVD+/-RW, Dual-Layer LightScribe	32-Bit	

Keyboard -		Windows XP	Red Hat Linux
One of the following	PS/2 Standard Keyboard	32-Bit, 64-Bit	7.2, 7.3, WS3
	USB Standard Keyboard	32-Bit, 64-Bit	7.2, 7.3, WS3

Mouse -		Windows XP	Red Hat Linux
One of the following	PS/2 2-Button Scroll Mouse	32-Bit, 64-Bit	7.2, 7.3, WS3
	PS/2 3-Button Mouse	32-Bit, 64-Bit	7.2, 7.3, WS3
	USB 2-Button Optical Scroll Mouse	32-Bit, 64-Bit	7.2, 7.3, WS3
	USB 3-Button Optical Mouse	32-Bit, 64-Bit	7.2, 7.3, WS3

## Standard Features - Custom Components

<b>Audio</b>	Integrated Digital AC97 audio with internal speaker Sound Blaster Audigy 2 ZS PCI	32-Bit	
<b>NIC</b>	Broadcom BCM5751 NetXtreme™ Gigabit Ethernet Controller (PCI-E)	32-Bit, 64-Bit	7.2, 7.3, WS3
<b>Graphics</b>		<b>Windows XP</b>	<b>Red Hat Linux</b>
	NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI - up to 2 of these two cards can be integrated in the factory)	32-Bit, 64-Bit	7.2, 7.3, WS3
	NVIDIA Quadro NVS 400 PCI (64 MB, quad head, VGA & DVI)	32-Bit, 64-Bit	
	NVIDIA Quadro NVS 280 PCI Express (64 MB, VGA & DVI)	32-Bit, 64-Bit	
	ATI FireGL V3100 PCI Express (128 MB)	32-Bit, 64-Bit	
	NVIDIA Quadro FX 540 PCI Express (128 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3
	NVIDIA Quadro FX 1300 PCI Express (128 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3
	NVIDIA Quadro FX 1400 PCI Express (128 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3
	ATI FireGL V5100 PCI Express (128 MB)	32-Bit, 64-Bit	
	NVIDIA Quadro FX 3400 PCI Express (256 MB)	32-Bit, 64-Bit	7.2, 7.3, WS3
<b>Miscellaneous</b>	Solenoid lock and hood sensor	32-Bit, 64-Bit	7.2, 7.3, WS3
	IEEE 1394 PCI Card	32-Bit, 64-Bit	
	Trusted Platform Module	32-Bit	
	HP 64-bit Transition Tool Kit	32-Bit, 64-Bit	
<b>Software</b>	Symantec Norton AntiVirus 2004 (optional)*	32-Bit	
	HP Performance Tuning Framework*	32-Bit, 64-Bit	
	Altiris Recovery*	32-Bit	
	HP Client Manager Software v6.0*	32-Bit	
	* Not available with Linux Operating System		

## Standard Features - Specs

Operating System (choice)	Microsoft Windows XP Professional
	Windows XP Professional x64 Edition ( <a href="http://www.hp.com/workstations/pws/windowsxp64/">http://www.hp.com/workstations/pws/windowsxp64/</a> )
	OR Red Hat Enterprise Linux Workstation 3 Update 2 (64-bit only)
	OR HP Installer Kit for Linux (includes drivers for both 32-bit & 64-bit OS versions on HP xw8200, xw6200 and xw4200)
Form factor	Minitower
Color	Carbonite/Alloy metallic
System Board Form Factor	Non-standard ATX
Processor	Single or dual 64-bit Intel Xeon processors (Nocona) with Hyper-Threading Technology
CPU Bus Speed Supported	800 MHz FSB
Standard L2 Cache	1 MB L2 cache
Chipset	Intel E7525
Memory Expansion Slots	4 DIMM's
Memory Type Supported	DDR-2 (ECC registered)
Memory Speed Supported	DDR-2 Synch DRAM PC2-3200 (400 MHz) Registered ECC
Maximum Memory	8 GB (4 DIMMs slots, 2 GB DIMMs required to meet maximum configurations)
Network controller	Integrated Broadcom 5751 10/100/1000 for HP
Audio	Integrated AC'97 digital audio with S/PDif 6-channel pass-through, stereo microphone, and Yamaha XG Lite Softsynth support
PCI slots	4 PCI slots (full-height) 1 PCI Express (x8 mechanically, x4 electrically) 1 PCI Express x16 graphics
AGP slot	none
Bays	Total Bays = 5
Internal Bays	<ul style="list-style-type: none"> <li>Two 3.5 inch bays with acoustic dampening rail assemblies</li> </ul>
External Bays	<ul style="list-style-type: none"> <li>Two 5.25 inch full length 2003 mm maximum device depth (top bay is limited to 198 mm depth when optional smart cover solenoid lock is installed). Bottom bay can be converted to an internal 3.5 inch 3rd Hard Drive bay using optional bracket</li> <li>One 3.5 inch bay for optional floppy drive</li> </ul>
Parallel Port	1
Serial Port	1
Front I/O	2 USB 2.0, Headphone, Microphone, optional IEEE 1394 <b>NOTE:</b> Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix ( <a href="http://www.hp.com/support/linux_hardware_matrix">http://www.hp.com/support/linux_hardware_matrix</a> ) for details, and to the Linux User Manual ( <a href="http://www.hp.com/support/linux_user_manual">http://www.hp.com/support/linux_user_manual</a> ) for tips on user-enablement of the IEEE 1394 Card.
Rear I/O	6 USB 2.0, 1 standard serial port, 1 parallel port, PS/2 keyboard and mouse, 1 RJ-45 to integrated Gigabit LAN, Audio In, Audio Out, Mic In
USB Keyboard	Optional
USB Mouse	Optional
PS/2 Keyboard	1
PS/2 Mouse	1
Chassis Dimensions (H x W x D)	17.3 x 6.5 X 17.3 in (44.1 x 16.5 x 44.0 cm)
System weight	Standard config – 35 lb
Shipping weight	Varies by region
Temperature	Operating 40° to 95° F (5° to 35° C)
	Non-operating -40° to 140° F (-40° to 60° C)

## Standard Features - Specs

Humidity	Operating	8% to 85%
	Non-operating	8% to 90%
Maximum Altitude (nonpressurized)	Operating	10,000 ft (3,000 m)
	Non-operating	30,000 ft (9,100 m)
Power Supply	500W wide-ranging, active Power Factor Correction	
Interfaces Supported	1 SATA interface (2 serial-ATA connectors), 1 EIDE interface (2 EIDE connectors) for optical drives, optional multi-bay interface	
Hard Drive Controller (PCI) Supported	Ultra160 or Ultra320, or SATA RAID, or Ultra320 RAID	
<b>Preinstalled Software</b>		
HP Client Manager Software v6.0*		
Altiris Local Recovery*		
Alert Standard Format specification*		
Norton AntiVirus 2004 (optional preinstall)*		
CD/DVD software dependent on optical drive choices		
* <a href="#">Not available on Linux</a>		

## Standard Features - Preconfigured Global Models

xw6200X/XD2.8/B80/ H1.0/280E/dF/s	<b>Processor</b>	64-bit Intel Xeon processor 2.80 GHz 1 MB/800
	<b>OS</b>	Microsoft Windows XP Professional
	<b>Cache Memory</b>	1 MB L2
	<b>Memory</b>	1 GB (2x512) DDR2-400 ECC Registered
	<b>Optical Drive</b>	16X DVD-ROM
	<b>Hard Drive</b>	80 GB SATA/150 7200 rpm (1st)
	<b>Graphics</b>	NVIDIA Quadro NVS 280 PCI Express included in base configuration - Alternative graphics card options should be ordered separately - they are listed below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI, can be added as second card) NVIDIA Quadro NVS 400 PCI (64 MB, quad head, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1300 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3400 PCI Express (256 MB) <b>NOTE:</b> Please see <a href="#">Part Numbers in After market options/Standalone accessories section.</a>
	<b>Mouse</b>	HP scroll mouse (PS/2)
	<b>Other</b>	Includes Floppy Drive and Standard PS/2 Keyboard

### xw6200X/XD2.8/B80/H1.0/280E/dF/s Country Code Key

N. America	PD896AW#ABA	<b>Switzerland</b> (German/French)	PD896AW#AR8
Fr. Canadian	PD896AW#ABC	<b>Switzerland</b> (Italian/English)	PD896AW#ACN
L. America	PD896AW#ABM	<b>Dutch</b>	PD896AW#ABH
Japan (English)	PD896AW#ACF	<b>Denmark</b>	PD896AW#ACE
Japan (Japanese)	PD896AW#ABJ	<b>Asia/Pacific</b> (English)	PD896AW#AB4
UK	PD896AW#ABU	<b>Korea</b>	PD896AW#AB1
Germany	PD896AW#ABD	<b>China</b>	PD896AW#AB2
France	PD896AW#ABF	<b>Taiwan</b>	PD896AW#AB0
Italy	PD896AW#ABZ	<b>India</b>	PD896AW#ACJ
Spain	PD896AW#ABE	<b>Australia</b>	PD896AW#ABG
Europe	PD896AW#AK6	<b>Thailand</b>	PD896AW#AKL



## Standard Features - Preconfigured Global Models

xw6200X/XD3.2/C74/ H1.0/280E/dF/s	<b>Processor</b>	64-bit Intel Xeon processor 3.20 GHz 1 MB/800
	<b>OS</b>	Microsoft Windows XP Professional
	<b>Cache Memory</b>	1 MB L2
	<b>Memory</b>	1 GB (2x512) DDR2-400 ECC Registered
	<b>Optical Drive</b>	16X DVD-ROM
	<b>Hard Drive</b>	74 GB SATA/150 10,000 rpm (1st)
	<b>Graphics</b>	NVIDIA Quadro NVS 280 PCI Express included in base configuration - Alternative graphics card options should be ordered separately - they are listed below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI, can be added as second card) NVIDIA Quadro NVS 400 PCI (64 MB, quad head, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1300 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3400 PCI Express (256 MB) <b>NOTE:</b> Please see <a href="#">Part Numbers in After market options/Standalone accessories section.</a>
	<b>Mouse</b>	HP scroll mouse (PS/2)
	<b>Other</b>	Includes Floppy Drive and Standard PS/2 Keyboard

### xw6200X/XD3.2/C74/H1.0/280E/dF/s Country Code Key

N. America	PM199AW#ABA	Switzerland (German/French)	PM199AW#AR8
Fr. Canadian	PM199AW#ABC	Switzerland (Italian/English)	PM199AW#ACN
L. America	PM199AW#ABM	Dutch	PM199AW#ABH
Japan (English)	PM199AW#ACF	Denmark	PM199AW#ACE
Japan (Japanese)	PM199AW#ABJ	Asia/Pacific (English)	PM199AW#AB4
UK	PM199AW#ABU	Korea	PM199AW#AB1
Germany	PM199AW#ABD	China	PM199AW#AB2
France	PM199AW#ABF	Taiwan	PM199AW#AB0
Italy	PM199AW#ABZ	India	PM199AW#ACJ
Spain	PM199AW#ABE	Australia	PM199AW#ABG
Europe	PM199AW#AK6	Thailand	PM199AW#AKL

## Standard Features - Preconfigured Global Models

xw6200X/XD3.2+/B80/H1.0/280E/dF/s	<b>Processor</b>	Dual 64-bit Intel Xeon processors 3.20 GHz 1 MB/800
	<b>OS</b>	Microsoft Windows XP Professional
	<b>Cache Memory</b>	1 MB L2 per processor
	<b>Memory</b>	1 GB (2x512) DDR2-400 ECC Registered
	<b>Optical Drive</b>	16X DVD-ROM
	<b>Hard Drive</b>	80 GB SATA/150 7200 rpm (1st)
	<b>Graphics</b>	NVIDIA Quadro NVS 280 PCI Express included in base configuration - Alternative graphics card options should be ordered separately - they are listed below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI, can be added as second card) NVIDIA Quadro NVS 400 PCI (64 MB, quad head, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1300 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3400 PCI Express (256 MB) <b>NOTE:</b> Please see <a href="#">Part Numbers in After market options/Standalone accessories section.</a>
	<b>Mouse</b>	HP scroll mouse (PS/2)
	<b>Other</b>	Includes Floppy Drive and Standard PS/2 Keyboard

### xw6200X/XD3.2+/B80/H1.0/280E/dF/s Country Code Key

N. America	PD898AW#ABA	Switzerland (German/French)	PD898AW#AR8
Fr. Canadian	PD898AW#ABC	Switzerland (Italian/English)	PD898AW#ACN
L. America	PD898AW#ABM	Dutch	PD898AW#ABH
Japan (English)	PD898AW#ACF	Denmark	PD898AW#ACE
Japan (Japanese)	PD898AW#ABJ	Asia/Pacific (English)	PD898AW#AB4
UK	PD898AW#ABU	Korea	PD898AW#AB1
Germany	PD898AW#ABD	China	PD898AW#AB2
France	PD898AW#ABF	Taiwan	PD898AW#AB0
Italy	PD898AW#ABZ	India	PD898AW#ACJ
Spain	PD898AW#ABE	Australia	PD898AW#ABG
Europe	PD898AW#AK6	Thailand	PD898AW#AKL

## Standard Features - Preconfigured Global Models

xw6200X/XD3.4/C74/ H1.0/280E/dF/s	<b>Processor</b>	64-bit Intel Xeon processor 3.40 GHz 1 MB/800
	<b>OS</b>	Microsoft Windows XP Professional
	<b>Cache Memory</b>	1 MB L2
	<b>Memory</b>	1 GB (2x512) DDR2-400 ECC Registered
	<b>Optical Drive</b>	16X DVD-ROM
	<b>Hard Drive</b>	74 GB SATA/150 10,000 rpm (1st)
	<b>Graphics</b>	NVIDIA Quadro NVS 280 PCI Express included in base configuration - Alternative graphics card options should be ordered separately - they are listed below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI, can be added as second card) NVIDIA Quadro NVS 400 PCI (64 MB, quad head, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1300 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3400 PCI Express (256 MB) <b>NOTE:</b> Please see <a href="#">Part Numbers in After market options/Standalone accessories section.</a>
	<b>Mouse</b>	HP scroll mouse (PS/2)
	<b>Other</b>	Includes Floppy Drive and Standard PS/2 Keyboard

### xw6200X/XD3.4/C74/H1.0/280E/dF/s Country Code Key

N. America	PM200AW#ABA	Switzerland (German/French)	PM200AW#AR8
Fr. Canadian	PM200AW#ABC	Switzerland (Italian/English)	PM200AW#ACN
L. America	PM200AW#ABM	Dutch	PM200AW#ABH
Japan (English)	PM200AW#ACF	Denmark	PM200AW#ACE
Japan (Japanese)	PM200AW#ABJ	Asia/Pacific (English)	PM200AW#AB4
UK	PM200AW#ABU	Korea	PM200AW#AB1
Germany	PM200AW#ABD	China	PM200AW#AB2
France	PM200AW#ABF	Taiwan	PM200AW#AB0
Italy	PM200AW#ABZ	India	PM200AW#ACJ
Spain	PM200AW#ABE	Australia	PM200AW#ABG
Europe	PM200AW#AK6	Thailand	PM200AW#AKL

## Standard Features - Preconfigured Global Models

xw6200X/XD3.4+/B80/ H1.0/280E/dF/s	<b>Processor</b>	Dual 64-bit Intel Xeon processors 3.40 GHz 1 MB/800
	<b>OS</b>	Microsoft Windows XP Professional
	<b>Cache Memory</b>	1 MB L2 per processor
	<b>Memory</b>	1 GB (2x512) DDR2-400 ECC Registered
	<b>Optical Drive</b>	16X DVD-ROM
	<b>Hard Drive</b>	80 GB SATA/150 7200 rpm (1st)
	<b>Graphics</b>	NVIDIA Quadro NVS 280 PCI Express included in base configuration - Alternative graphics card options should be ordered separately - they are listed below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI, can be added as second card) NVIDIA Quadro NVS 400 PCI (64 MB, quad head, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1300 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3400 PCI Express (256 MB) <b>NOTE:</b> Please see <a href="#">Part Numbers in After market options/Standalone accessories section.</a>
	<b>Mouse</b>	HP scroll mouse (PS/2)
	<b>Other</b>	Includes Floppy Drive and Standard PS/2 Keyboard

### xw6200X/XD3.4+/B80/H1.0/280E/dF/s Country Code Key

N. America	PD900AW#ABA	Switzerland (German/French)	PD900AW#AR8
Fr. Canadian	PD900AW#ABC	Switzerland (Italian/English)	PD900AW#ACN
L. America	PD900AW#ABM	Dutch	PD900AW#ABH
Japan (English)	PD900AW#ACF	Denmark	PD900AW#ACE
Japan (Japanese)	PD900AW#ABJ	Asia/Pacific (English)	PD900AW#AB4
UK	PD900AW#ABU	Korea	PD900AW#AB1
Germany	PD900AW#ABD	China	PD900AW#AB2
France	PD900AW#ABF	Taiwan	PD900AW#AB0
Italy	PD900AW#ABZ	India	PD900AW#ACJ
Spain	PD900AW#ABE	Australia	PD900AW#ABG
Europe	PD900AW#AK6	Thailand	PD900AW#AKL

## Standard Features - Preconfigured Global Models

xw6200X/XD3.4+/C74/ H2/280E/dF/s	<b>Processor</b>	Dual 64-bit Intel Xeon processors 3.40 GHz 1 MB/800
	<b>OS</b>	Microsoft Windows XP Professional
	<b>Cache Memory</b>	1 MB L2 per processor
	<b>Memory</b>	2 GB (2x1 GB) DDR2-400 ECC Registered
	<b>Optical Drive</b>	16X DVD-ROM
	<b>Hard Drive</b>	74 GB SATA/150 7200 rpm (1st)
	<b>Graphics</b>	NVIDIA Quadro NVS 280 PCI Express included in base configuration - Alternative graphics card options should be ordered separately - they are listed below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI, can be added as second card) NVIDIA Quadro NVS 400 PCI (64 MB, quad head, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1300 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3400 PCI Express (256 MB) <b>NOTE:</b> Please see <a href="#">Part Numbers in After market options/Standalone accessories section.</a>
	<b>Mouse</b>	HP scroll mouse (PS/2)
	<b>Other</b>	Includes Floppy Drive and Standard PS/2 Keyboard

### xw6200X/XD3.4+/B80/H1.0/280E/dF/s Country Code Key

N. America	PR845AW#ABA	Switzerland (German/French)	PR845AW#AR8
Fr. Canadian	PR845AW#ABC	Switzerland (Italian/English)	PR845AW#ACN
L. America	PR845AW#ABM	Dutch	PR845AW#ABH
Japan (English)	PR845AW#ACF	Denmark	PR845AW#ACE
Japan (Japanese)	PR845AW#ABJ	Asia/Pacific (English)	PR845AW#AB4
UK	PR845AW#ABU	Korea	PR845AW#AB1
Germany	PR845AW#ABD	China	PR845AW#AB2
France	PR845AW#ABF	Taiwan	PR845AW#ABO
Italy	PR845AW#ABZ	India	PR845AW#ACJ
Spain	PR845AW#ABE	Australia	PR845AW#ABG
Europe	PR845AW#AK6	Thailand	PR845AW#AKL

## Standard Features - Preconfigured Global Models

xw6200X/XD3.6/C74/ H1.0/280E/dF/s	<b>Processor</b>	64-bit Intel Xeon processor 3.60 GHz 1 MB/800
	<b>OS</b>	Microsoft Windows XP Professional
	<b>Cache Memory</b>	1 MB L2
	<b>Memory</b>	1 GB (2x512) DDR2-400 ECC Registered
	<b>Optical Drive</b>	16X DVD-ROM
	<b>Hard Drive</b>	74 GB SATA/150 10,000 rpm (1st)
	<b>Graphics</b>	NVIDIA Quadro NVS 280 PCI Express included in base configuration - Alternative graphics card options should be ordered separately - they are listed below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI, can be added as second card) NVIDIA Quadro NVS 400 PCI (64 MB, quad head, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1300 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3400 PCI Express (256 MB) <b>NOTE:</b> Please see <a href="#">Part Numbers in After market options/Standalone accessories section.</a>
	<b>Mouse</b>	HP scroll mouse (PS/2)
	<b>Other</b>	Includes Floppy Drive and Standard PS/2 Keyboard

### xw6200X/XD3.6/C74/H1.0/280E/dF/s Country Code Key

N. America	PM201AW#ABA	Switzerland (German/French)	PM201AW#AR8
Fr. Canadian	PM201AW#ABC	Switzerland (Italian/English)	PM201AW#ACN
L. America	PM201AW#ABM	Dutch	PM201AW#ABH
Japan (English)	PM201AW#ACF	Denmark	PM201AW#ACE
Japan (Japanese)	PM201AW#ABJ	Asia/Pacific (English)	PM201AW#AB4
UK	PM201AW#ABU	Korea	PM201AW#AB1
Germany	PM201AW#ABD	China	PM201AW#AB2
France	PM201AW#ABF	Taiwan	PM201AW#AB0
Italy	PM201AW#ABZ	India	PM201AW#ACJ
Spain	PM201AW#ABE	Australia	PM201AW#ABG
Europe	PM201AW#AK6	Thailand	PM201AW#AKL

## Standard Features - Preconfigured Global Models

xw6200X/XD3.6+/B80/ H1.0/280E/dF/s	<b>Processor</b>	Dual 64-bit Intel Xeon processors 3.60 GHz 1 MB/800
	<b>OS</b>	Microsoft Windows XP Professional
	<b>Cache Memory</b>	1 MB L2 per processor
	<b>Memory</b>	1 GB (2x512) DDR2-400 ECC Registered
	<b>Optical Drive</b>	16X DVD-ROM
	<b>Hard Drive</b>	80 GB SATA/150 7200 rpm (1st)
	<b>Graphics</b>	NVIDIA Quadro NVS 280 PCI Express included in base configuration - Alternative graphics card options should be ordered separately - they are listed below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI, can be added as second card) NVIDIA Quadro NVS 400 PCI (64 MB, quad head, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1300 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3400 PCI Express (256 MB) <b>NOTE:</b> Please see <a href="#">Part Numbers in After market options/Standalone accessories section.</a>
	<b>Mouse</b>	HP scroll mouse (PS/2)
	<b>Other</b>	Includes Floppy Drive and Standard PS/2 Keyboard

### xw6200X/XD3.6+/B80/H1.0/280E/dF/s Country Code Key

N. America	PD902AW#ABA	Switzerland (German/French)	PD902AW#AR8
Fr. Canadian	PD902AW#ABC	Switzerland (Italian/English)	PD902AW#ACN
L. America	PD902AW#ABM	Dutch	PD902AW#ABH
Japan (English)	PD902AW#ACF	Denmark	PD902AW#ACE
Japan (Japanese)	PD902AW#ABJ	Asia/Pacific (English)	PD902AW#AB4
UK	PD902AW#ABU	Korea	PD902AW#AB1
Germany	PD902AW#ABD	China	PD902AW#AB2
France	PD902AW#ABF	Taiwan	PD902AW#AB0
Italy	PD902AW#ABZ	India	PD902AW#ACJ
Spain	PD902AW#ABE	Australia	PD902AW#ABG
Europe	PD902AW#AK6	Thailand	PD902AW#AKL

## Standard Features - Preconfigured Global Models

xw6200X/XD3.6+/C74/ H2/280E+/dF/s – Trader station	<b>Processor</b>	Dual 64-bit Intel Xeon processors 3.60 GHz 1 MB/800
	<b>OS</b>	Microsoft Windows XP Professional
	<b>Cache Memory</b>	1 MB L2 per processor
	<b>Memory</b>	2 GB (2x1) DDR2-400 ECC Registered
	<b>Optical Drive</b>	16X DVD-ROM
	<b>Hard Drive</b>	74 GB SATA/150 10,000 rpm (1st)
	<b>Graphics</b>	NVIDIA Quadro NVS 280 PCI Express included in base configuration - Alternative graphics card options should be ordered separately - they are listed below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI, can be added as second card) NVIDIA Quadro NVS 400 PCI (64 MB, quad head, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1300 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3400 PCI Express (256 MB) <b>NOTE:</b> Please see <a href="#">Part Numbers in After market options/Standalone accessories section.</a>
	<b>Mouse</b>	HP scroll mouse (PS/2)
	<b>Other</b>	Includes Floppy Drive and Standard PS/2 Keyboard

### xw6200X/XD3.6+/C74/H2/280E+/dF/s Country Code Key

N. America	PM202AW#ABA	Switzerland (German/French)	PM202AW#AR8
Fr. Canadian	PM202AW#ABC	Switzerland (Italian/English)	PM202AW#ACN
L. America	PM202AW#ABM	Dutch	PM202AW#ABH
Japan (English)	PM202AW#ACF	Denmark	PM202AW#ACE
Japan (Japanese)	PM202AW#ABJ	Asia/Pacific (English)	PM202AW#AB4
UK	PM202AW#ABU	Korea	PM202AW#AB1
Germany	PM202AW#ABD	China	PM202AW#AB2
France	PM202AW#ABF	Taiwan	PM202AW#AB0
Italy	PM202AW#ABZ	India	PM202AW#ACJ
Spain	PM202AW#ABE	Australia	PM202AW#ABG
Europe	PM202AW#AK6	Thailand	PM202AW#AKL



## After-Market Options

Processors	2nd 64-bit Intel Xeon™ processor with Hyper-Threading	Part Number
	64-bit Intel Xeon processor at 2.8 GHz with 800 MHz FSB & 1 MB of L2 cache	DY665A
	64-bit Intel Xeon processor at 3.0 GHz with 800 MHz FSB & 1 MB of L2 cache	DY666A
	64-bit Intel Xeon processor at 3.0 GHz with 800 MHz FSB & 2 MB of L2 cache	PQ903A
	64-bit Intel Xeon processor at 3.2 GHz with 800 MHz FSB & 1 MB of L2 cache	DY667A
	64-bit Intel Xeon processor at 3.2 GHz with 800 MHz FSB & 2 MB of L2 cache	PQ904A
	64-bit Intel Xeon processor at 3.4 GHz with 800 MHz FSB & 1 MB of L2 cache	DY668A
	64-bit Intel Xeon processor at 3.4 GHz with 800 MHz FSB & 2 MB of L2 cache	PQ905A
	64-bit Intel Xeon processor at 3.6 GHz with 800 MHz FSB & 1 MB of L2 cache	DY669A
	64-bit Intel Xeon processor at 3.6 GHz with 800 MHz FSB & 2 MB of L2 cache	PQ906A

Graphics	Multi display solutions	PCI	PCI-Express	Windows XP	Red Hat Linux	Part Number
	NVIDIA Quadro NVS 280 (64 MB, VGA & DVI)	X		32-Bit, 64-Bit	7.2, 7.3, WS3	AA932A
	NVIDIA Quadro NVS 400 (64 MB, quad head, VGA & DVI)	X		32-Bit, 64-Bit		AA605A
	Quadro NVS 400 DVI cables	NA		32-Bit, 64-Bit		AA606A
	NVIDIA Quadro NVS 280 PCI-E (64 MB, VGA & DVI)		X	32-Bit, 64-Bit	7.2, 7.3, WS3	DY650A
	DMS-59 to Dual DVI Cable for NVS cards	X	X	32-Bit, 64-Bit		DL139A
	NVIDIA Quadro FX 330 (64 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3	PB332A
	ATI FireGL V3100 (128 MB)		X	32-Bit, 64-Bit		PE949A
	NVIDIA Quadro FX 540 (128 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3	PH791A
	NVIDIA Quadro FX 1300 (128 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3	PB331A
	NVIDIA Quadro FX 1400 (128 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3	PM979A
	ATI FireGL V5100 (128 MB)		X	32-Bit, 64-Bit		PB330A
	NVIDIA Quadro FX 3400 (256 MB)		X	32-Bit, 64-Bit	7.2, 7.3, WS3	PB329A

## After-Market Options

Hard Drives	SATA Hard Drives	Windows XP	Red Hat Linux	Part Number
	40 GB SATA/150 Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3	PB371A
	80 GB SATA/150 Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3	DE705A
	160 GB SATA/150 Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3	DE706A
	250 GB SATA/150 Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3	DS702A
	400 GB SATA/150 Hard Drive (7200 rpm)	32-Bit, 64-Bit	WS3	PM254A
	74 GB SATA/150 Hard Drive (10,000 rpm)	32-Bit, 64-Bit	WS3	DX760A
	<b>SCSI Hard Drives</b>			
	73 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3	AA613A
	146 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3	AA614A
	300 GB Ultra320 SCSI Hard Drive (10,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3	DY672A
	36 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3	AA616A
	73 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3	AA617A
	146 GB Ultra320 SCSI Hard Drive (15,000 rpm)	32-Bit, 64-Bit	7.2, 7.3, WS3	DY671A
	Bracket HDD 3.5to5.25 xw6200			DY659A
	Cable, 3 port SCSI xw4200/6200			DY661A

Controllers	SCSI Controllers	PCI	PCI-Express	Windows XP	Red Hat Linux	Part Number
	U320 SCSI Controller RAID 0,1 & external connector	X		32-Bit, 64-Bit	7.2, 7.3, WS3	DZ554A
	Ultra320 SCSI RAID Adaptec 2120S (Windows only, includes external connector)	X		32-Bit, 64-Bit		AA850A

Hard Drives		Windows XP	Red Hat Linux	Part Number
	<b>Keyboards</b>			
	HP PS/2 Standard Keyboard (Carbonite/Silver)	32-Bit, 64-Bit	7.2, 7.3, WS3	DT527A
	HP USB Standard Keyboard (Carbonite/Silver)	32-Bit, 64-Bit	7.2, 7.3, WS3	DT528A
	HP USB 2004 Modular Keyboard	32-Bit, 64-Bit		DT530A
	Smartcard adapter for modular keyboard	32-Bit, 64-Bit		DT531A
	<b>Pointing Devices</b>			
	HP PS/2 2-Button Scroll Mouse (Carbonite)	32-Bit, 64-Bit	7.2, 7.3, WS3	DD440B
	HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)	32-Bit, 64-Bit	7.2, 7.3, WS3	DC172B
	HP PS/2 3-Button Mouse	32-Bit, 64-Bit	7.2, 7.3, WS3	AA778A
	HP USB Optical 3-button mouse	32-Bit, 64-Bit	7.2, 7.3, WS3	DY651A
	USB Spaceball 5000	32-Bit, 64-Bit		DV675A
	USB SpaceMouse	32-Bit, 64-Bit		DZ203A

## After-Market Options

Networking	NICs	PCI	PCI-Express	Windows XP	Red Hat Linux	Part Number
	Intel Pro/1000MT	X		32-Bit, 64-Bit	7.2, 7.3, WS3	DC193A
	HP Gigabit by Broadcom (BCM5782)	X		32-Bit, 64-Bit	7.2, 7.3, WS3	DC194A
	Broadcom BCM5751 NetXtreme™ Gigabit Ethernet Controller (PCI-E)		X	32-Bit, 64-Bit	7.2, 7.3, WS3	DZ556A

Memory (DIMMs)	400 MHz DDR-2 PC2-3200 ECC Registered DIMMs	Windows XP	Red Hat Linux	Part Number
	256 MB DDR-2 PC2-3200 (400 MHz) ECC Registered	32-Bit, 64-Bit	7.2, 7.3, WS3	DY656A
	512 MB DDR-2 PC2-3200 (400 MHz) ECC Registered	32-Bit, 64-Bit	7.2, 7.3, WS3	DY658A
	1 GB DDR-2 PC2-3200 (400 MHz) ECC Registered	32-Bit, 64-Bit	7.2, 7.3, WS3	DY655A
	2 GB DDR-2 PC2-3200 (400 MHz) ECC Registered	32-Bit, 64-Bit	7.2, 7.3, WS3	DY657A

Monitors (Supported by all Operating Systems offered by HP)	TFTs	Part Number
	HP TFT L2335 (23-inch)	P9615W#
	HP TFT L2035 (20.1-inch)	P9614W#
	HP TFT L1955 (19.1-inch)	PD974A5
	HP TFT L1755 (17-inch)	PL777AA

Multimedia	PCI	PCI-Express	Part Number
IEEE1394 Firewire PCI card (Windows only)	X		PA997A

**NOTE:** Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix ([http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)) for details, and to the Linux User Manual ([http://www.hp.com/support/linux\\_user\\_manual](http://www.hp.com/support/linux_user_manual)) for tips on user-enablement of the IEEE 1394 Card.

## After-Market Options

Optical Drives		Windows XP	Red Hat Linux	Part Number
	<b>DVD-ROM Drive</b> 16X/40X DVD-ROM w/ +R read	32-Bit, 64-Bit	7.2, 7.3, WS3	AA620A
	<b>CD-ROM Drive</b> 48X Max CD-ROM Drive	32-Bit, 64-Bit	7.2, 7.3, WS3	DC143B
	<b>CD-RW Drive</b> 48X/32X/48X CD-RW Drive	32-Bit, 64-Bit	7.2, 7.3, WS3	DE205A
	<b>Combo Drive</b> 48X/32X Combo DVD-ROM/CD-RW Drive	32-Bit, 64-Bit	7.2, 7.3, WS3	DE206A
	<b>DVD+/-RW Drive</b> 16X DVD+/-RW, Dual-Layer	32-Bit, 64-Bit	7.2, 7.3, WS3	PH205A
	16X DVD+/-RW, Dual-Layer LightScribe	32-Bit, 64-Bit		DZ555A

Optical Drives		Windows XP	Red Hat Linux	Part Number
	256 MB USB 2.0 II drive key	32-Bit, 64-Bit	7.2, 7.3, WS3	PH657A
	1.44 MB Internal Floppy Drive	32-Bit, 64-Bit	7.2, 7.3, WS3	DY670A
	HP DAT24i Internal DDS3 tape drive	32-Bit		C1555D
	HP DAT24e External DDS3 tape drive	32-Bit		C1556D
	HP DAT40i Internal DDS4 tape drive	32-Bit		C5686B
	HP DAT40e External DDS4 tape drive	32-Bit		C5687C
	HP DAT72i Internal DAT72 tape drive	32-Bit		Q1522A
	HP DAT72e External DAT72 tape drive	32-Bit		Q1523A

Security				Part Number
	Chassis clamp lock, universal, no cable			DE817A
	Chassis clamp lock, universal, with cable			DE818A

Brackets/Stand				Part Number
	HP xw6200 sliding rack kit			DY663A
	Depth Adjustable Rails (stationary)			332558-B21
	Sliding Shelf kit			234672-B21
	Fixed shelf kit			253449-B21

Other Devices				Part Number
	IDE Cable Kit for HP xw6200 and xw8200 (2nd)			DY660A
	Front Card Guide and Fan Kit			DY648A

Operating Systems				Part Number
	Red Hat Enterprise Linux Workstation 3 Update 4 (32-bit version)			PT509A
	Red Hat Enterprise Linux Workstation 3 Update 4 (64-bit version)			PT510A

## After-Market Options

Software	Windows XP	Red Hat Linux	Part Number
HP Remote Graphics V2 LTU for HP WS	32-Bit	7.2, 7.3, WS3	PE672A
HP Remote Graphics V3LTU for HP WS	32-Bit	7.2, 7.3, WS3	PY682AA
HP Remote Graphics V2 Receiver LTU	32-Bit	7.2, 7.3, WS3	PE674A
HP Remote Graphics V3 Receiver LTU	32-Bit	7.2, 7.3, WS3	PY684AA
HP Remote Graphics V2 software media	32-Bit	7.2, 7.3, WS3	PE675A
HP Remote Graphics V3 software media	32-Bit	7.2, 7.3, WS3	PY685AA
HP Remote SW for HP 1 year Update Subscription	32-Bit	7.2, 7.3, WS3	PN681A
HP Remote SW Receiver 1 year Update Subscription	32-Bit	7.2, 7.3, WS3	PN680A

## Memory

### E7525 chipset

#### DDR-2 SDRAM ECC REGISTERED MEMORY

If only using one DIMM, install it in socket 1. For more than one DIMM, install memory in pairs (a pair would be considered to be the DIMMs in sockets 1 & 2, 3 & 4) and do not mix speeds. It is always best to load the memory in pairs rather than a single DIMM (two 512 MB DIMMs will have better performance than a single 1 GB DIMM). Each pair of DIMMs must be the same size and same DRAM technology. The Intel E7525 chipset supports ECC Registered 400 MHz (PC2-3200) DDR-2 memory only.

#### MAXIMUM MEMORY


Supports up to 8 GB of DDR SDRAM

#### POSSIBLE MEMORY CONFIGURATIONS

*Not all memory configurations possible are represented below.*

DIMM Size	Slot			
	1	2	3	4
256 MB	256 MB			
512 MB	512 MB			
512 MB	256 MB	256 MB		
1 GB	1 GB			
1 GB	256 MB	256 MB	256 MB	256 MB
2 GB	1 GB	1 GB		
2 GB	512 MB	512 MB	512 MB	512 MB
4 GB	1 GB	1 GB	1 GB	1 GB
8 GB	2 GB	2 GB	2 GB	2 GB

## Storage

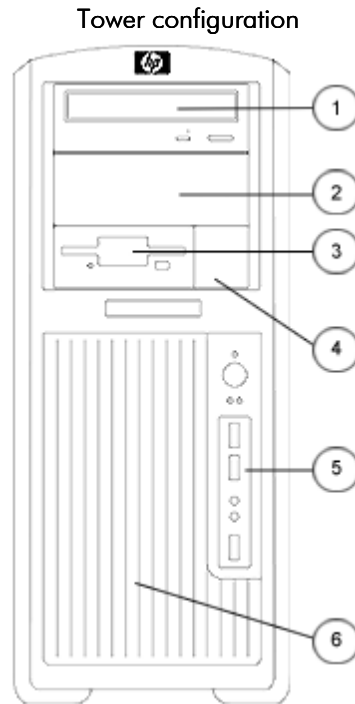

### Convertible Minitower

Optional Diskette Drive  
 5.25" Storage Drive Bays  
 (position 1 drive bay is limited to 198 mm depth when optional smart cover solenoid lock is installed; position 2 drive bay can be converted to an internal 3.5" 3rd hard drive bay with optional bracket)  
 3.5" Storage Drive Bays with acoustic dampening rail assemblies

	Quantity Supported	Position Supported	Controller
Optional Diskette Drive	1	3	Diskette
5.25" Storage Drive Bays (position 1 drive bay is limited to 198 mm depth when optional smart cover solenoid lock is installed; position 2 drive bay can be converted to an internal 3.5" 3rd hard drive bay with optional bracket)	2	1, 2	IDE
3.5" Storage Drive Bays with acoustic dampening rail assemblies	2 (3)	4, 5 (and 2, for 3rd drive using optical bay)	SATA or optional SCSI Factory Integrated RAID*

\* **NOTE:** Factory Integrated RAID 0 Configuration (Striped Array) and RAID 1 Configuration (Mirrored Array) requires 2 hard drives with identical speeds, capacity and interface.

## Additional Technical Specifications

<b>System Board</b>	
Architecture	Xeon 64-bit/PCI-E
Chipset	Intel E7525/ICH5R Chipset
Super I/O Controller	SMSC LPC47B397
System Board Form Factor	ATX (slightly larger than standard ATX)
Processor Socket	Dual 604 Pin ZIF
DIMM Connectors (DDR2, 1.8V)	4
AGP Connector (1.5V)	None
Integrated Graphics	None
PCI Connectors (5.0V)	4 full length 33 MHz 32-bit
PCI Express Connectors	1 x16 1 x8 (with x4 electricals)
PCI card guide	Optional, tool-free support for all full-length cards with PCI extender
Flash ROM	Yes
AC97 integrated audio	Yes
CD ROM IN (Audio)	Yes
AUX IN (Audio)	Yes
Clear CMOS Button	Yes
CPU Fan Header	Yes
Chassis Fan Header	Yes
Chassis Speaker Header	Yes
CMOS Battery Holder – Lithium	Yes
Hood Lock Header	Yes
Hood Sensor Header	Yes
Multibay Header	Yes
Hard drive acoustic dampening rails	Standard in 2 internal 3.5" bays, tool-free
Integrated SATA RAID	<ul style="list-style-type: none"> <li>• RAID 0 and RAID 1</li> <li>• Supports one RAID array on 2 ports</li> <li>• Creation of 2 drive HDD array</li> <li>• RAID 0 Configuration - Striped Array</li> <li>• RAID 1 Configuration - Mirrored Array</li> </ul>
Integrated Broadcom	Yes
NetXtreme Gigabit Ethernet for HP	Yes
Wake-On-Lan®	Yes
ASF 1.0 (Alert Standard Format)	Yes
Power Supply Header	Yes
Power Switch, Power LED & Hard Drive LED Header	Yes
Password Clear Header	Yes
Riser Connector	None



## Additional Technical Specifications

HDD activity LED Header	Yes, 2 & 4 pin
PCI extender that connects to System Board	None

## Technical Specifications

<b>Cooling</b>	
Cooling Solutions Supported	Yes
Power Supply Fan (Variable Speed)	92 x 25 mm
Processor Fan-Heatsink (Variable Speed)	70 x 15 mm
Chassis Fan (front)	One 92 x 25 mm (optional)
Chassis Fan (rear)	Two 92 x 25 mm (standard)
Internal Speaker	Standard

<b>Power Supply</b>	
Full Ranging Input	Yes
Active Power Factor Correction (APFC) (Input Current is nearly 1/2 a non-APFC PS)	Yes
Passive Power Factor Correction (PFC)	No
Operating Voltage Range	90 - 264 VAC/118 VAC
Rated Voltage Range	100 - 240 VAC
Rated Line Frequency	50-60 Hz/400Hz
Operating Line Frequency Range	47 - 66 Hz/393 - 407Hz
Rated Input Current	9A/9A
Maximum Rated Power	500 W
Heat Dissipation	Typical 1228.9 btu/hr Maximum 1706 btu/hr
PS Size (wide x high x deep)	150 mm x 98 mm x 168 mm
Energy Star Compliant	Yes
FEMP Standby Power Compliant (<2W in S5 - Power Off)	No
Surge Tolerant Full Ranging Power Supply	Withstands power surges up to 2000V
Typical configuration power consumption	2 processors (2x3.6GHz Xeon), 1 GB memory (2x512 MB) Two hard drives (2xSATA 40 GB), DVD-ROM drive PCI-Express Graphics Card (FX 1300) Floppy, Monitor
	<b>Input Power consumption @ 120Vac/60Hz</b>
Typical operating mode (system busy)	360 W = 1228.9 btu/hr
Windows XP Idle	201 W = 685.9 btu/hr
Hibernate mode (S4)	6.4 W = 21.84 btu/hr
Power Off (S5)	6.4 W = 21.84 btu/hr

<b>ROM Features</b>	<b>Description</b>
Instantly Available PC	Allows for very low power consumption with quick resume time

## Technical Specifications

ROM Based F10 Setup and diagnostics	Review and customize BIOS settings
Remote System Installation via F12 (PXE) (Remote Boot from Server)	Allows a new or existing system to boot over the network and download software, including the operating system
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS
ROM revision levels	<ul style="list-style-type: none"> <li>Identifies system ROM revision levels and reports in ROM-based F10 setup. Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information</li> </ul>
System board revision level	<ul style="list-style-type: none"> <li>Allows management SW to read the revision level of the system board. Revision level is digitally encoded into the hardware and cannot be modified</li> </ul>
Auto Setup when New Hardware Installed	System automatically detects addition of new hardware
Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Enable or disables serial, parallel, USB, audio, and network ports
Removable Media Write/Boot Control	Prevents ability to boot from removable media on supported devices (and can disable writes to media)
Power-On Password	Prevents an unauthorized person from booting up the computer
Setup Password	Prevents an unauthorized person from changing the system configuration
Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
Memory Change Alert (Requires HP Client Manager Software)	Alerts management console if memory is removed or changed
Thermal Alert (Requires HP Client Manager Software)	Monitors the temperature state within the chassis. Three modes: <ul style="list-style-type: none"> <li>NORMAL – normal temperature ranges</li> <li>ALERTED – excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown</li> <li>SHUTDOWN – excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs</li> </ul>
Master Boot Record Security	Detects changes to MBR and optional restoration, useful in protecting from viruses
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console
Remote Wakeup/shutdown	<ul style="list-style-type: none"> <li>System administrators can power on, restart, and power off a client computer from a remote location.</li> <li>Enables cost-effective power consumption when the administrator needs to distribute software, perform security management, or update the ROM</li> </ul>
ACPI (Advanced Configuration and Power Management Interface)	<ul style="list-style-type: none"> <li>Allows the system to wake from a low power mode</li> <li>Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system. Supports ACPI 2.0 for full compatibility with 64-bit operating systems</li> </ul>
Keyboard-less Operation	The system can be operated without a keyboard
SMBIOS	System Management BIOS 2.3.5, previously known as DMI BIOS, for system management information
Localized ROM Setup	Common BIOS image supports configuration (Setup) in 11 languages, with local keyboard mappings
Asset tag	Allows user or MIS to set unique tag string in ROM
Ownership tag	Allows user or MIS to set unique tag string in ROM
Memory Scrubbing	Allows memory controller to transparently correct transient ECC errors in the background

## Technical Specifications

Memory Remapping	Allows system memory lost to PCI devices to be reclaimed above 4 GB, for use with operating systems that support more than 4 GB (Windows XP 64-bit edition, Linux)
Per-slot control	Allows individual slot configuration (option ROM., latency)
Adaptive cooling	Fan control parameters are set according to detected hardware configuration for optimal acoustics
Pre-boot diagnostics	Early (pre-video) critical errors are reported via beeps and blinks on the power LED

<b>Other deployment &amp; management features</b>	
HP Client Management Solutions	<p>HP Client Management Solutions help simplify management of Workstations and significantly reduce total ownership costs. These solutions share a common design and are highly integrated due to the extensive work between HP and its partner Altiris.</p> <p>HP Client Manager Software is included free with all HP business PCs and Workstations. It enables central tracking, monitoring, and management of the hardware aspects of HP client systems:</p> <ul style="list-style-type: none"> <li>• Get valuable hardware information such as CPU, memory, video, and security settings</li> <li>• Monitor system health to fix problems before they occur</li> <li>• Install drivers and BIOS updates without visiting each PC</li> <li>• Remotely configure BIOS and security settings</li> <li>• Automate processes to quickly resolve hardware problems</li> </ul> <p>Additional Altiris solutions (fee-based) are available to address Workstation management challenges through the entire IT lifecycle including:</p> <ul style="list-style-type: none"> <li>• Inventory assessment</li> <li>• Software license compliance</li> <li>• Personality migration</li> <li>• Software image deployment</li> <li>• Software distribution</li> <li>• Asset management</li> <li>• Client backup and recovery</li> <li>• Problem resolution</li> </ul> <p>Visit <a href="http://www.hp.com/go/easydeploy">http://www.hp.com/go/easydeploy</a> for more information, to download HP Client Manager Software, and to evaluate the Altiris solutions.</p>
System Software Manager (free)	A free utility that detects and updates BIOS, device drivers, and management agent versions on your networked PCs and workstations
Altiris Local Recovery	Provides data and system file protection for HP business PCs to enable fast recovery of information that is accidentally deleted or if the system becomes corrupted. Designed for disconnected or seldom-connected users, Local Recovery protects your HP computer's data and system state by taking scheduled snapshots, which are then stored in a protected area on the local hard disk. System backup and disaster recovery is now simple and fast for all users, regardless of connectivity
Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
Software Restore CD	Restores computer to its original factory shipping image
Asset Tag	<ul style="list-style-type: none"> <li>• Repository for storing company-specific property asset numbers for easy tracking</li> <li>• Initially set equal to the system serial number</li> <li>• Stored in a protected section of non-volatile memory that can be accessed and modified with the F10 Setup program</li> </ul>
DIMM Serial Presence Detect	Detects whether or not memory DIMMs are present and their type
Hard drive serial number, model, and manufacturer	Hard drive manufacturer, model, and serial number is stored in the hard drive firmware and reported in ROM-based F10 setup

## Technical Specifications

System serial number, model, & manufacturer	System serial number, model, & manufacturer stored in a non-volatile memory and can be retrieved with management SW or viewed in ROM-based F10 setup
ROM revision levels	Identifies system ROM revision levels and reports in ROM-based F10 setup Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information
Memory Change Alert (Requires HP Client Manager Software)	Alerts management console if memory is removed or changed
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen
Hard drive interface Integrity Monitoring (CRC Checking)	A feature of SATA and SCSI, Cyclic Redundancy Checking provides data transfer verification and proactive notification of hard drive data transmission problems with recommendations for enhancing system performance. It detects all the following errors' types: <ul style="list-style-type: none"> <li>• single bit errors</li> <li>• double bit errors</li> <li>• an odd number of errors</li> <li>• error bursts up to 32-bits long</li> </ul>
Drive Self Tests (DPS)	<ul style="list-style-type: none"> <li>• Drive Protection System (Adaptec and LSI SCSI controllers do not offer DPS)</li> <li>• A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user.</li> <li>• Running independently of the operating system, it can be accessed through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced.</li> </ul> <p>The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures DPS Access through F10 Setup during Boot (F10 diagnostic access not available with SCSI drives)</p>
SMART Technology (Self-Monitoring, Analysis and Reporting Technology)	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure SMART I – Drive Failure Prediction SMART II – Off-Line Data Collection SMART III – Off-Line Read Scanning with Defect Reallocation

<b>Security Features</b>	
Access panel key lock (standard)	Prevents removal of the access panel and all internal components including optical and floppy drives
Smart Cover solenoid lock (optional)	Prevents removal of the access panel and all internal components including optical and floppy drives. Eliminates the need for a physical key by enabling password-protected locking & unlocking by a local or remote user.
Padlock (optional)	Prevents entire system theft and discourages access panel removal. 7mm diameter padlock loop at rear of system.
Kensington Cable Lock (optional)	Prevents entire system theft only. 3mm x 7mm slot at rear of system.
Universal chassis clamp lock (optional)	The version without a cable discourages access panel removal and prevents theft of IO devices. The version with a cable additionally prevents entire system theft and allows multiple systems to be secured with a single cable.
Intrusion Sensor (optional)	Notifies a local or remote user when the chassis access panel has been opened.

## Technical Specifications

Serviceability Features of System	
Access panel	Tool-less, one-handed
Optical drives	Tool-less
Floppy drive	Tool-less
Hard drives	Tool-less
Expansion cards	Tool-less
Chassis fan removal	Tool-less
Green user touch points	Yes, on tool-free internal chassis mechanisms
Color-coordinated cables and connectors	Yes
Memory	Tool-less, can be upgraded without removing any internal components
CPUs	Tool-less, can be upgraded without removing any internal components
Power supply diagnostic LED	Yes, dual function: AC OK & power OK
Power Button	Yes, ACPI multi-function
Power LED	Yes, dual color LED indicates normal operation and faults.
Hard drive activity LED	Yes
Internal speaker	Yes, used for pre-boot diagnostic beep codes
Dual Color Power and HD LED on Front of Computer (Indicates Normal Operations and Fault Conditions)	green – normal red – fault
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS.
Configuration Record SW	Yes
Over-Temp Warning on Screen (Requires IM Agents)	Yes
OS CD (Restore OS CD)	Restores computer to its original factory shipping image
Restore CD	Restores the computer to its original factory shipping image
Flash ROM	Yes
3.3V Aux Power LED on System PCA	Yes
Dual Function 5V Aux Power LED (ON)/PS_ON LED (OFF) on System PCA	Yes
Diagnostic Power Switch LED on board	Yes
Clear Password Jumper	Yes
Clear CMOS Button	Yes
CMOS Battery Holder for easy Replacement	Yes
Processor ZIF Socket for easy Upgrade	Yes
DIMM Connectors for easy Upgrade	Yes

## Technical Specifications

NIC LEDs (integrated) (Green & Amber)	Used to determine NIC status
ASF 1.0 support (Alert Standard Format)	Industry-standard specification for network alerting in operating system-absent environments
Dual function front power switch	Also acts as a reset switch when held for 4 seconds

<b>Service and Support</b>	On-site Warranty and Service ( <a href="#">Note 1</a> ): This three-year, limited warranty and service offering delivers three years of on-site, next business-day ( <a href="#">Note 2</a> ) service for parts and labor and includes free telephone support ( <a href="#">Note 3</a> ) 24 x 7. Global coverage ( <a href="#">Note 2</a> ) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering.
	<a href="#">NOTE 1</a> : Terms and conditions may vary by country. Certain restrictions and exclusions apply.
	<a href="#">NOTE 2</a> : On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.
	<a href="#">NOTE 3</a> : Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

## Technical Specifications - Audio

AC97 Integrated ADI 1981B Audio	Type	Integrated
	AC '97 Stereo Codec	Yes
	FM Synthesis Support	Yes – Yamaha XG Lite
	OPL3 FM Synthesis Support	Yes
	Sound Blaster Compatibility	Yes
	Audio Jacks	Microphone-In (20-K ohm Input Impedance); rear stereo and front analog microphone ports Line-In (12-K ohm Input Impedance) Line-Out * (less than 800 ohms Output Impedance, expects at least a 10-K ohm load) Headphone-Out (2.5 Ohms Output Impedance, expects at least a 32 ohm load)
	<b>NOTE:</b> *Internal Speaker Amplifier is for Internal Speaker only. External Speakers need to be powered externally.	
	Sampling	7 kHz – 48 kHz
	Wavetable Syntheses (software)	Yes – GM and FM Midi Support, Direct Music and Down Loadable Soundset (4 Meg DLS Level 1 and 2 Support)
	3D Positional Sound	No
Digital Audio	Yes	
Analog Audio	Yes	
Number of Channels on Line-Out (mono/stereo)	Stereo (Left & Right channels)	
Internal Audio Speaker Power Rating	3W	
Internal Speaker	Yes	
Hardware Equalizer for Internal Speaker	Fixed 7 Band ParametricEQ	
External Speaker Jack (Line-Out)	Yes	



## Technical Specifications - Communications

<b>Broadcom BCM5751 NetXtreme Gigabit Ethernet Controller (PCI-E)</b>	<b>Connector</b>	RJ-45	
	<b>Controller</b>	Broadcom 5751 PCI-E 1.0a LAN Controller	
	<b>Memory</b>	Integrated 96Kb frame buffer memory	
	<b>Data rates supported</b>	10/100/1000 Mbps	
	<b>Compliance</b>	IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control	
	<b>Bus architecture</b>	PCI-E 1.0a	
	<b>Data path width</b>	X1	
	<b>Data path speed</b>	2.5Gbit per sec per direction transfer rate	
	<b>Data transfer mode</b>	Bus-master DMA	
	<b>Hardware certifications</b>	FCC class B, NRTL Mark Canada and United States, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia	
	<b>Power requirement</b>	3.1 watts @ +3.3V AUX supply	
	<b>Boot ROM support</b>	Yes	
	<b>Network transfer rate</b>	10BASE-T (half-duplex)	10 Mbps
		10BASE-T (full-duplex)	20 Mbps
		100BASE-TX (half-duplex)	100 Mbps
		100BASE-TX (full-duplex)	200 Mbps
		1000BASE-T	1000 Mbps
	<b>Environmental</b>	<b>Operating temperature</b>	32° to 131° F (0° to 55° C)
		<b>Operating humidity</b>	85% at 131° F (55° C)
	<b>Dimensions</b>	4.4 x 2.2 x 0.08 in (11.2 x 5.5 x .2 cm)	
<b>Operating system driver support</b>	Microsoft Windows 2000 and XP, Red Hat Linux 7.2, 7.3 and Red Hat Enterprise Linux 3		
<b>Management capabilities</b>	WOL, PXE , Remote cable management		
<b>Alerting</b>	ASF 2.0		
<b>Kit contents</b>	Broadcom 5751, CD, Broadcom NetXtreme Gigabit Ethernet PCI NIC, drivers, quick install guide, product warranty statement		
<hr/>			
<b>Intel Pro 1000 MT Gigabit NIC</b>	<b>Connector</b>	RJ-45	
	<b>Controller</b>	Intel 82540EM Gigabit Controller	
	<b>Memory</b>	Integrated 96Kb frame buffer memory	
	<b>Data rates supported</b>	10/100/1000 Mbps	
	<b>Compliance</b>	IEEE 802.1A, 802.1P, 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control	
	<b>Bus architecture</b>	PCI 2.2	
	<b>Data path width</b>	32-bit, 33/66 MHz bus interface	
	<b>Data transfer mode</b>	Bus-master DMA	
	<b>Hardware certifications</b>	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union	
	<b>Power requirement</b>	1.48 watts @ +3.3V AUX supply with 5V tolerance	
	<b>Boot ROM support</b>	Yes	

## Technical Specifications - Communications

<b>Network transfer rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T, 1000 Mbps
<b>Environmental</b>	<b>Operating temperature</b> 32° to 131° F (0° to 55° C) <b>Operating humidity</b> 85% at 131° F (55° C)
<b>Dimensions</b>	6.4 x 4.8 x 0.8 in (16.3 x 12.1 x 1.9 cm)
<b>Operating system driver support</b>	Microsoft Windows NT 4.0, Microsoft Windows 98, Microsoft Windows 2000, Microsoft Windows XP, Linux 2.2, Linux 2.4
<b>Management capabilities</b>	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Intel PROset II utility
<b>Kit contents</b>	The Intel Pro 1000 MT NIC, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement

## Technical Specifications - Controllers

LSI Logic LSI 20320 Ultra320 SCSI single channel host adapter	Bus architecture	PCI-X (backward compatible with PCI)
	Number of supported devices	Up to 15 SCSI devices
	Interface protocol	64 bit, 133MHz PCI-X
	Host bus transfer rate	Up to 1MB/s
	SCSI data transfer rate	Up to 320MB/s per channel
	SCSI Bus	Wide Ultra320, Low Voltage Differential, and Ultra Wide Single-Ended
	Internal connector	68-pin HD
	External connector	68 pin
	Total connectors	2
	Plug and Play Support	No
	Dimensions (H x L)	6.6 x 2.5 in (16.9 x 6.4 cm)
	Approvals	CE, VCCI, Canada, C-Tick, FCC class B, UL 94VO
	Operating system support	Microsoft Windows XP Professional Windows XP Professional x64 Edition
	Kit contents	Controller card, driver CD, LED cables, user documentation and warranty card.

Adaptec SCSI RAID 2120S Card	Dimensions (H x D)	2.5 x 6.6 in (6.4 x 16.8 cm) Low profile card
	RAID level	0, 1, 10, 5, 50, JBOD
	Data Transfer Rate	Up to 320 MB/s
	Cache Memory	64 MB (onboard)
	Device Support	Up to 15 SCSI devices
	Bus Type	64-bit/66 MHz PCI (Also support 32-bit/33 MHz PCI)
	Internal Connectors	One 68-pin high-density
	External Connectors	One 68-pin VHDCI
	System Requirements	Intel PC or equivalent with available PCI slot
	Operating Temperature	32° to 131° F (0° to 55° C)
	Power Requirements	4 amps @ +5V
	Operating System Support	Windows 2000 Professional, Windows XP Professional, Windows XP Professional x64 Edition
	Other	Optimized disk utilization Online RAID Level Migration Online capacity expansion Immediate RAID availability (background initialization) S.M.A.R.T. support
	Kit Contents	Controller card, driver CD, LED cables, user documentation and warranty card.

## Technical Specifications - Hard Drives

Serial ATA Hard Drives (7200 rpm)	40 GB	<b>Capacity</b>	40,020,664,320 bytes			
		<b>Height</b>	1 in (2.6 cm)			
		<b>Width</b>	Media diameter: 3.5 in (8.9.x cm) Physical size: 4 in (10.2 cm)			
		<b>Interface</b>	Serial ATA			
		<b>Synchronous Transfer Rate (Maximum)</b>	150 MB/s			
		<b>Buffer</b>	2 MB			
		<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	1.0 ms		
			<b>Average</b>	8.5 ms		
			<b>Full-Stroke</b>	18.0 ms		
		<b>Rotational Speed</b>	7,200 rpm			
		<b>Logical Blocks</b>	78,165,360			
		<b>Operating Temperature</b>	32° to 140° F (0° to 60° C)			
			80 GB	<b>Capacity</b>	80,026,361,856 bytes	
				<b>Height</b>	1 in (2.6 cm)	
<b>Width</b>	Media diameter: 3.5 in (8.9.x cm) Physical size: 4 in (10.2 cm)					
<b>Interface</b>	Serial ATA					
<b>Synchronous Transfer Rate (Maximum)</b>	150 MB/s					
<b>Buffer</b>	8 MB					
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>			1.0 ms		
	<b>Average</b>			8.5 ms		
	<b>Full-Stroke</b>			18 ms		
<b>Rotational Speed</b>	7,200 rpm					
<b>Logical Blocks</b>	156,301,488					
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C)					

## Technical Specifications - Hard Drives

160 GB	<b>Capacity</b>	160,041,885,696 bytes		
	<b>Height</b>	1 in (2.6 cm)		
	<b>Width</b>	Media diameter: 3.5 in (8.9.x cm) Physical size: 4 in (10.2 cm)		
	<b>Interface</b>	Serial ATA		
	<b>Synchronous Transfer Rate (Maximum)</b>	150 MB/s		
	<b>Buffer</b>	8 MB		
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	1.0 ms	
		<b>Average</b>	8.5 ms	
		<b>Full-Stroke</b>	18 ms	
	<b>Rotational Speed</b>	7,200 rpm		
	<b>Logical Blocks</b>	312,581,808		
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C)		
	250 GB	<b>Capacity</b>	250,059,350,016 bytes	
<b>Height</b>		1 in (2.6 cm)		
<b>Width</b>		Media diameter: 3.5 in (8.9 cm) Physical size: 4 in (10.2 cm)		
<b>Interface</b>		Serial ATA		
<b>Synchronous Transfer Rate (Maximum)</b>		150 MB/s		
<b>Buffer</b>		8 MB		
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)		<b>Single Track</b>	0.8 ms	
		<b>Average</b>	<9.0 ms	
		<b>Full-Stroke</b>	≤17 ms	
<b>Rotational Speed</b>		7,200 rpm		
<b>Logical Blocks</b>		488,397,168		
<b>Operating Temperature</b>		41° to 131°F (5° to 55°C)		

## Technical Specifications - Hard Drives

400 GB	<b>Capacity</b>	400,088,457,216 bytes		
	<b>Height</b>	1 in (2.6 cm)		
	<b>Width</b>	Media diameter: 3.5 in (8.9.x cm) Physical size: 4 in (10.2 cm)		
	<b>Interface</b>	Serial ATA		
	<b>Synchronous Transfer Rate (Maximum)</b>	150 MB/s		
	<b>Buffer</b>	8 MB		
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.8 ms	
		<b>Average</b>	<11.0 ms	
		<b>Full-Stroke</b>	≤15 ms	
	<b>Rotational Speed</b>	7,200 rpm		
	<b>Logical Blocks</b>	781,422,768		
	<b>Operating Temperature</b>	41° to 131°F (5° to 55°C)		

SATA Hard Drives (10,000 rpm)	74 GB	<b>Capacity</b>	74,355,769,344 bytes		
		<b>Height</b>	1.0 in (2.54 mm)		
		<b>Width</b>	Media diameter: 3.3 in (84mm) Physical size: 4 in (10.2 cm)		
		<b>Interface</b>	Serial ATA		
		<b>Synchronous Transfer Rate (Maximum)</b>	150 MB/s		
		<b>Buffer</b>	8 MB		
		<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 ms	
			<b>Average</b>	4.5 ms	
			<b>Full-Stroke</b>	10.2 ms	
		<b>Rotational Speed</b>	10,000 rpm		
		<b>Logical Blocks</b>	145,226,112		
		<b>Operating Temperature</b>	41° to 140° F (5 to 60° C)		

## Technical Specifications - Hard Drives

Ultra320 SCSI Hard Drives (10,000 rpm)	73 GB	<b>Capacity</b>	73,407,865,856 bytes		
		<b>Height</b>	1.0 in (2.54 cm)		
		<b>Width</b>	3.5 in (8.9 cm)		
		<b>Interface</b>	68 pin LVD SCSI		
		<b>Synchronous Transfer Rate (Maximum)</b>	320 MB/s		
		<b>Buffer</b>	8 Mbytes		
		<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 msec	
			<b>Average</b>	<4.5 msec	
			<b>Full-Stroke</b>	<11.0 msec	
		<b>Rotational Speed</b>	10,000 rpm		
		<b>Logical Blocks</b>	143,374,738		
		<b>Operating Temperature</b>	40° to 130° F (5° to 55° C)		
			146 GB	<b>Capacity</b>	146,815,737,856 bytes
<b>Height</b>	1.0 in (2.54 cm)				
<b>Width</b>	3.5 in (8.9 cm)				
<b>Interface</b>	68 pin LVD SCSI				
<b>Synchronous Transfer Rate (Maximum)</b>	320 MB/s				
<b>Buffer</b>	8 Mbytes				
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>			0.3 msec	
	<b>Average</b>			<4.5 msec	
	<b>Full-Stroke</b>			<11.0 msec	
<b>Rotational Speed</b>	10,000 rpm				
<b>Logical Blocks</b>	286,749,488				
<b>Operating Temperature</b>	40° to 130° F (5° to 55° C)				
	300 GB			<b>Capacity</b>	300,000,000,000 bytes
		<b>Height</b>	1.0 in (2.54 cm)		
		<b>Width</b>	3.5 in (8.9 cm)		
		<b>Interface</b>	68 pin LVD SCSI		
		<b>Synchronous Transfer Rate (Maximum)</b>	320 MB/s		
		<b>Buffer</b>	8 Mbytes		
		<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 msec	
			<b>Average</b>	<4.5 msec	
			<b>Full-Stroke</b>	<11.0 msec	
		<b>Rotational Speed</b>	10,000 rpm		
		<b>Logical Blocks</b>	585,937,500		
		<b>Operating Temperature</b>	40° to 130° F (5° to 55° C)		

## Technical Specifications - Hard Drives

Ultra320 SCSI Hard Drives (15,000 rpm)	36 GB	<b>Capacity</b>	36,420,075,520 bytes		
		<b>Height</b>	1.0 in (2.54 cm)		
		<b>Width</b>	3.5 in (8.9 cm)		
		<b>Interface</b>	68 pin LVD SCSI		
		<b>Synchronous Transfer Rate (Maximum)</b>	320 MB/s		
		<b>Buffer</b>	8 Mbytes		
		<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 msec	
			<b>Average</b>	<4.5 msec	
			<b>Full-Stroke</b>	<11.0 msec	
		<b>Rotational Speed</b>	15,000 rpm		
		<b>Logical Blocks</b>	71,132,960		
		<b>Operating Temperature</b>	40° to 130°F (5° to 55°C)		
			73 GB	<b>Capacity</b>	73,407,865,856 bytes
<b>Height</b>	1.0 in (2.54 cm)				
<b>Width</b>	3.5 in (8.9 cm)				
<b>Interface</b>	68 pin LVD SCSI				
<b>Synchronous Transfer Rate (Maximum)</b>	320 MB/s				
<b>Buffer</b>	8 Mbytes				
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>			0.3 msec	
	<b>Average</b>			<4.5 msec	
	<b>Full-Stroke</b>			<11.0 msec	
<b>Rotational Speed</b>	15,000 rpm				
<b>Logical Blocks</b>	143,374,738				
<b>Operating Temperature</b>	40° to 130°F (5° to 55° C)				
	146 GB			<b>Capacity</b>	146,815,737,856 bytes
		<b>Height</b>	1.0 in (2.5 cm)		
		<b>Width</b>	3.5 in (8.9 cm)		
		<b>Interface</b>	68 pin LVD SCSI		
		<b>Synchronous Transfer Rate (Maximum)</b>	320 MB/s		
		<b>Buffer</b>	8 Mbytes		
		<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.3 msec	
			<b>Average</b>	<4.5 msec	
			<b>Full-Stroke</b>	<11.0 msec	
		<b>Rotational Speed</b>	15,000 rpm		
		<b>Logical Blocks</b>	143,374,738		
		<b>Operating Temperature</b>	40° to 130°F (5° to 55°C)		



## Technical Specifications - Removable Storage

<b>USB Disk on Key</b>	<b>Dimensions (HxWxD)</b>	0.9 x 0.7 x 3.9 in (2.3 x 1.8 x 9.8 cm)
	<b>Weight</b>	0.05 lb (0.02 kg)
	<b>USB Specification</b>	2.0
	<b>Transfer Rate</b>	Read-1023 KB/Sec; Write-850 KB/Sec
	<b>Storage Media</b>	Solid state flash memory, no moving parts
	<b>Power Supply</b>	USB Bus-powered, no external power required
	<b>Capacity</b>	256 MB

## Technical Specifications - Input/Output Devices

PS/2 OR USB '04 Standard Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
		Weight	2 lb (0.9 kg) minimum
	Electrical	Operating voltage	+ 5VDC $\pm$ 5%
		Power consumption	50-mA maximum (with three LEDs ON)
		ESD	CE level 4, 15-kV air discharge
		EMI - RFI	Conforms to FCC rules for a Class B computing device
	Mechanical	Microsoft PC 99 - 2001	Functionally compliant
		Languages	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
		Cable length	6 ft (1.8 m)
		Microsoft PC 99 - 2001	Mechanically compliant
	Environmental	Acoustics	43-dBA maximum sound pressure level
		Operating temperature	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
		Non-operating vibration	4-g peak acceleration
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
		Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Operating system support	Windows 2000, XP Professional, and XP Professional x64 Edition Red Hat Linux 7.2, 7.3 and WS3 Versions	
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	
	Kit contents	Keyboard, keyboard software media, installation guide, warranty card, safety and comfort	

## Technical Specifications - Input/Output Devices

USB Modular Keyboard	Physical characteristics	Keys	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.59 x 6.73 x 0.90 in (472 x 170 x 23 mm) with numeric pad attached
Electrical		Weight	2 lb (0.9 kg) minimum
		Operating voltage	+ 5VDC $\pm$ 5%
		Power consumption	50-mA maximum (with three LEDs ON)
		System interface	USB Type A plug connector
		ESD	CE level 4, 15-kV air discharge
		EMI - RFI	Conforms to FCC rules for a Class B computing device
		Microsoft PC 99 - 2001	Functionally compliant
Mechanical		Languages	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
		Cable length	6 ft (1.8 m)
Environmental		Microsoft PC 99 - 2001	Mechanically compliant
		Acoustics	43-dBA maximum sound pressure level
		Operating temperature	50° to 122°F (10° to 50°C)
		Non-operating temperature	-22° to 140°F (-30° to 60°C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
		Non-operating vibration	4-g peak acceleration
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
		Drop (in box)	442 in (107 cm) on concrete, 16-drop sequence
		Operating system support	Windows 2000 and Windows XP
Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, USB-IF		
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS		
Kit contents	Keyboard, numerical keypad, USB cable, I/O Security Software & Documentation CD including Modular Access Keyboard software & installation guide, warranty card, safety and comfort guide		

## Technical Specifications - Input/Output Devices

<b>2-Button Scroll Mouse (PS/2)</b>	<b>Scroll Wheel</b>	8 mm		
	<b>Maximum Rotation Speed</b>	30 mm/s		
	<b>Switch Type</b>	Light force micro-switch		
	<b>Switch Life</b>	1 million operations		
	<b>Mechanical Life</b>	Minimum 200,000 revolutions		
	<b>Environmental</b>	<b>Operating Temperature</b>	50° to 122° F (10° to 50° C)	
		<b>Non-operating Temperature</b>	-22° to 140° F (-30° to 60° C)	
		<b>Operating Humidity</b>	10% to 90% (non condensing at ambient)	
		<b>Non-operating Humidity</b>	20% to 80% (non condensing at ambient)	
		<b>Operating Shock</b>	40 g, 6 surfaces	
		<b>Non-operating Shock</b>	80 g, 6 surfaces	
		<b>Operating Vibration</b>	2 g peak acceleration	
		<b>Non-operating Vibration</b>	4 g peak acceleration	
		<b>Mechanical</b>	<b>Resolution</b>	400 ± 20% DPI
			<b>Tracking Speed</b>	10 in/s maximum
			<b>Acceleration</b>	100 in/s
			<b>Switch Actuation</b>	85 g nominal peak force
			<b>Switch Life</b>	1,000,000 operations (using Hasco modified tester)
	<b>Regulatory Approvals</b>	<b>Cable Length</b>	2 m	
		<b>PC98-99</b>	Mechanically compliant	
		UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BCIQ, C-Tick		

---

<b>HP Optical Scroll Mouse (USB)</b>	<b>Dimensions (H x L x W)</b>	1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)
	<b>Weight</b>	0.27 lb (0.12 kg)
	<b>Cable length</b>	72.8 in (185 cm)
	<b>System requirements</b>	Microsoft Windows 95, 98, 2000, Me, and XP

---

## Technical Specifications - Input/Output Devices

HP 3-Button Mouse (PS/2)	Dimensions/Weight	Height	1.42 in (3.6 cm)
		Length	4.17 in (10.7 cm)
		Width	2.87 in (7.4 cm)
		Weight	5.20 oz (150 g)
	Environmental	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating temperature	-4° to 140° F (-20° to 60° C)
	Mechanical	Operating humidity	10% to 90% (non condensing at ambient)
		Resolution	400 20% DPI
		Tracking speed	10 in/s Maximum
		Switch life	1,000,000 operations (using Hasco modified tester)
Switch type		Micro-switches	
Tracking mechanism life		155 miles (250 km) at average speed of 10 in/s	
	Cable length	6 ft (1.8 m)	
	PC98-99	Mechanically compliant	

Spaceball 5000 (USB)	Physical characteristics	Dimensions (H x W x D)	3.0 x 6.0 x 8.4 in (7.6 x 15.2 x 21.3 cm)
		Ball Diameter	2.2 in (5.6 cm)
		Weight	2.1 lb (9.94 kg)
		Features	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw) Certified for leading CAD and DCC applications
	Environmental	Operating temperature	50° to 104° F (10° to 40° C)
		Non-operating temperature	43° to 140° F (6° to 60° C)
		Operating humidity	8% to 80% (non-condensing at ambient)
	Mechanical	Non-operating humidity	5% to 80% (non-condensing at ambient)
		Buttons	12 programmable (unshifted)
		Ball Force Range	0.5 - 8.2N/1.8 - 29.5 oz
Ball Torque Range		0.085 – 0.33 oz-in. (6.91 Nmm)	
Serial Specifications	Resolution	10 bits	
	Connector	USB 1.1 or greater	
	Cable Length	12.8 ft. (3.9 m)	
	Data Rate	USB model – 16 msec	
Software Drivers Available	Flow Control	Xon/Xoff (on PS/2 model only)	
	USB model	Microsoft Windows XP	
System Requirements	Disk Space	10 MB free disk space	
Regulatory Approvals	UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick		

## Technical Specifications - Input/Output Devices

HP SpaceMouse Plus USB	Physical characteristics	Dimensions (H x W x D)	7.4 x 4.72 x 1.73 in (18.8 x 12.0 x 4.4 cm)
		Cap Diameter	2 x 6.5 x 6.6 mm
		Weight	1.5 lb (0.68 kg)
		Features	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw) Certified for leading CAD and DCC applications
	Environmental	Operating temperature	41° to 140° F (5° to 60° C)
		Non-operating temperature	-13° to 158° F (-25° to 70° C)
		Operating humidity	10 to 98 % RH (non-condensing)
		Non-operating humidity	10 to 98 % RH (non-condensing)
	Mechanical	Buttons	11 programmable (unshifted)
		Cap Force Range	0.2 N – 4.5 N
Cap Torque Range		4 Nmm to 100 Nmm	
Resolution		8 bit	
USB Specifications	Connector	USB 1.1 or greater	
	Cable Length	2 m	
	Data Rate	16 msec	
Software Drivers Available	Microsoft Windows XP		
System Requirements	Disk Space	10 MB free disk space	
Regulatory Approvals	UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick		

1394 Firewire FH/LP Card (PCI)	Device Interface Protocol	IEEE-1394a	
	Data Rate	100Mbps/s, 200Mbit/s and 400Mbps/s	
	Devices Supported	IEEE-1394 compliant devices	
	Connectors	Two IEEE1394 6-Pin Connector (Bracket Side) One 10-Pin (9 Contacts) Custom Connector (Internal)	
	Bus Interface	PCI	
	Physical	Low profile PCI card with a full height bracket	
	Environmental	Operating temperature	32° to 104° F (0° to 50° C)
		Non-operating temperature	-13° to 158° F (-25° to 70° C)
		Relative humidity	5% to 95%
		Ports	3 cable ports
	Minimum System Requirements	Microsoft XP Professional or Red Hat Linux 7.3/9.0 (Class Driver)	
		Pentium II 266 or faster	
		64-MB RAM	
		Available PCI slot	
		CD-ROM drive	
	Regulatory Agency Approval	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC	

## Technical Specifications - Optical Devices

<b>48X CD-ROM Drive</b>	<b>Capacity</b>	700 MB CD disc		
	<b>Dimensions (HxWxD)</b>	1.63 x 5.83 x 7.27 in (4.13 x 14.6 x 18.5 cm)		
	<b>Weight</b>	1.76 lb (0.8 kg)		
	<b>Interface</b>	ATAPI/EIDE		
	<b>Mounting Orientation</b>	Horizontal or vertical		
	<b>Data Transfer Rates - Read</b>	Digital audio extraction (minimum) – 1,200 KB/s (8X) CD read – up to 7,200 KB/s (48X)		
	<b>Media and Formats - Read</b>	<b>Formats:</b> CD-DA, CD-ROM (Mode 1 and 2), CD-XA Ready, Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (FMV), CD Plus, CD-Extra; <b>Media:</b> stamped, CD-R, CD-RW		
	<b>Data Transfer Modes</b>	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 0 (16.7 MB/s); UltraDMA Mode 2 (33.3 MB/s)		
	<b>Access Times (typical)</b>	<b>Random</b>	< 75 ms @ 48x	
		<b>Full-Stroke</b>	< 150 ms	
	<b>Start-up Time (typical)</b>	< 7 s (single session)	< 30 s (multisession)	
	<b>Stop Time (typical)</b>	< 4 s		
	<b>Read Buffer size</b>	128 KB (minimum)		
	<b>Audio Output</b>	<b>Line-Out</b>	0.7 VRMS	
		<b>Signal-to-Noise Ratio</b>	80 dB	
		<b>Channel Separation</b>	65 dB	
	<b>Configuration Jumper Block</b>	Master, slave, and cable select modes		
	<b>Operating Conditions</b>	<b>Temperature</b>	41° to 122° F (5° to 50° C)	
		<b>Humidity</b>	10% to 80%	
<b>Approvals/ Environmental</b>	UL 1950 (US and Canada), CSA, SEMKO, TUV; CE, FDA, FCC, IC, C-TICK			
<b>Operating Systems Supported</b>	Windows 2000, XP Professional, and XP Professional x64 Edition Red Hat Linux 7.2, 7.3 and WS3 Versions			
<b>Supplied Software</b>	None			

---

<b>16X/40X DVD-ROM Drive Height with +R Read Support</b>	<b>Height</b>	5.25-in, half-height, tray load	
	<b>Interface Type</b>	ATAPI/EIDE	
	<b>Dimensions (W x H x D)</b>	5.88 x 1.71 x 7.87 [max] in (149.5 x 43.25 x 200.0 [max] mm) (external, excluding bezel)	
<b>Disc Formats</b>	DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border; DVD+RW; DVD+R ; CD-ROM Mode 1 and 2; CD-DA; CD-ROM XA Mode 2, Form 1 and 2; CD-extra; CD-text; CD-I Mode 2, Form 1 and 2; CD-I ready; video CD, CD-bridge; PhotoCD (single and multi-session); CD-R; CD-RW		

## Technical Specifications - Optical Devices

<b>Disc Capacity</b>	<b>DVD-ROM</b>	4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R)
	<b>CD-ROM</b>	540 MB (Mode 1, 12 cm), 640 MB (Mode 2, 12 cm), 700 MB (80 minimum CD-R and CD-RW), 180 MB (8 cm)
<b>Access Times</b> (typical reads, including settling)	<b>DVD-ROM Single Layer</b>	120 ms
	<b>CD-ROM Mode 1</b>	90 ms
	<b>Full Stroke DVD</b>	240 ms (seek)
	<b>Full Stroke CD</b>	160 ms (seek)
	<b>Startup Time</b>	< 10 seconds (typical)
	<b>Stop Time</b>	< 4 seconds
	<b>Data Transfer Modes</b>	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 3 (44.4 MB/s)
<b>Maximum Data Transfer Rates</b>	<b>CD-ROM Read</b>	6000 KB/s (40X) Max
	<b>DVD-ROM Read</b>	21,600 KB/s (16X) Max
	<b>Digital Audio Extraction</b>	6000 KB/s (40X) Max
<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
	<b>DC Power Requirement</b>	5 VDC $\pm$ 5% – 100 mV ripple p-p
		12 VDC $\pm$ 5% – 200 mV ripple p-p
	<b>DC Current</b>	5 VDC – <800 mA typical, < 1000 mA maximum 12 VDC – < 870 mA typical, <1800 mA maximum
<b>Audio Output</b>	<b>Line-Out</b>	0.7 VRMS
	<b>Signal-to-Noise Ratio</b>	85 dB
	<b>Channel Separation</b>	65 dB
<b>Configuration Jumper Block</b>	Master, slave, and cable select modes	
<b>Data Interface Connector</b>	40-pin, shrouded and keyed, flat ribbon	
<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b> (operating)	41° to 122° F (5° to 50° C)
	<b>Relative Humidity</b> (operating)	10% to 85%
	<b>Maximum Wet Bulb Temperature</b> (operating)	86° F (30° C)
	<b>Certifications, Approvals</b>	MMC II support, multi-read certification, Microsoft WHQL certification, ACA AS/NZS 3548 class B, CNS 13438, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992
<b>Operating Systems Supported</b>	Windows 2000, XP Professional, and XP Professional x64 Edition Red Hat Linux 7.2, 7.3 and WS3 Versions	
<b>Kit Contents</b>	16X/40X DVD-ROM Drive, InterVideo WinDVD MPEG Movie Playback software, audio cable, and installation guide.	



HP 48X CD-RW	<b>Height</b>	5.25-inch, half-height, tray-load		
	<b>Mounting Orientation</b>	Horizontal or vertical		
	<b>Interface</b>	ATAPI/EIDE		
	<b>Dimensions (HxWxD)</b>	1.63 x 5.75 x 7.27 [max] in (4.13 x 14.6 x 18.5 [max] cm) (external, excluding bezel)		
	<b>Weight (max)</b>	2.0 lb (0.9 kg)		
	<b>Read Only Disc Parameters</b>	<b>Data Transfer Rates – Read</b>	Digital audio extraction (minimum) – 1,800 KB/s (12X) CD read – up to 7,200 KB/s (48X)	
		<b>Media and Formats – Read</b>	<b>Formats:</b> CD-DA, CD-ROM (Mode 1 and 2), CD-ROM XA (Mode 2, Form 1 and 2), Mixed Mode, CD-Plus, CD-Extra, CD-I FMV, Video CD, CD-Text, Photo CD (single and multisession) <b>Media:</b> stamped, CD-R, CD-RW	
		<b>Data Transfer Rates – Write</b>	CD-R write – 2100 KB/s (14X) to 7200 KB/s (40X) CD-RW write – 600 KB/s (4X) CD-RW write (high speed) – 1500 KB/s (10X) to 1800 KB/s (12X) CD-RW write (ultra high speed) – 2400 KB/s (16X) to 4800 KB/s (32X)	
	<b>Writeable Disc Parameters</b>	<b>Media and Formats – Write</b>	<b>Formats:</b> CD-DA, CD-ROM (Mode 1 and 2), CD-ROM XA (Mode 2, Form 1 and 2), Mixed Mode, CD-Plus, CD-Extra, CD-I FMV, Video CD, CD-Text <b>Media:</b> CD-R, CD-RW (including ultra-speed)	
		<b>Write Methods</b>	Disc-at-once, session-at-once,, track-at-once, incremental fixed and variable packet, multisession	
<b>Access Times (typical reads, including settling)</b>		<b>CD-ROM Mode 1</b>	125 ms	
	<b>Full Stroke CD</b>	210 ms (seek)		
	<b>Start-up Time (typical)</b>	<7 s (single session), <30 s (multisession)		
	<b>Stop Time (typical)</b>	<4 s		
	<b>Write Buffer Size</b>	2 MB		
	<b>Data Transfer Modes</b>	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 2 (33.3 MB/s)		

## Technical Specifications - Optical Devices

<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
	<b>DC Power Requirement</b>	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
	<b>DC Current</b>	5 VDC (< 1000 mA typical, < 1600 mA maximum) 12 VDC (< 600 mA typical, < 1400 mA maximum)
	<b>Total Drive Power (standby mode)</b>	< 2.5 Watt
<b>Audio Output</b>	<b>Line-Out</b>	0.7 VRMS
	<b>Signal-to-Noise Ratio</b>	74 dB
	<b>Channel Separation</b>	65 dB
<b>Configuration Jumper Block</b>	Master, slave, and cable select modes	
<b>Operating Conditions</b>	<b>Temperature</b>	41° to 122° F (5° to 50° C)
	<b>Humidity</b>	10% to 90% 10% to 90%
<b>Approvals/ Environmental</b>	MPC-3 compliant, multi-read requirements, ATA Spec X3T9.2, ATAPI Spec SFF-8020, ANSI C63.4-1992, UL 1950, ACA AS/NZS 3548, CB Bulletin No. 96A, CSA C22.2 No. 950-1995, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, EMKO-TSE 07/94, TUV EN60950, EN60825-1, MIC, BSMI-CNS 13438, CE, Microsoft PC2001 certification, Microsoft Logo for Windows XP and 2000.	
<b>Operating Systems Supported</b>	Windows 2000, XP Professional, and XP Professional x64 Edition Red Hat Linux 7.2, 7.3 and WS3 Versions	
<b>Supplied software</b>	Roxio Easy CD & DVD Creator: Create or copy CDs and DVDs, including music and data CDs, and data DVDs Dantz Retrospect Express: Back up systems to CD, DVD, or tape media.	

### 48X Combo CD-RW/DVD-ROM

<b>Height</b>	5.25-inch, half-height, tray-load
<b>Mounting Orientation</b>	Either horizontal or vertical
<b>Interface Type</b>	ATAPI/EIDE
<b>Dimensions (W x H x D)</b>	5.77 x 1.71 x 7.87 [max] in (14.66 x 4.34 x 20.0 [max] cm) (external, excluding bezel)
<b>Weight (max)</b>	2.6 lb (1.2 kg)

## Technical Specifications - Optical Devices

<b>Read Only Disc Parameters</b>	<b>Formats and Modes Supported</b>	CD-ROM-Mode 1; CD-ROM XA-Mode 2 (forms 1 and 2); CD-Bridge; CD digital audio; CD Extra; CD-I-Mode 2 (forms 1 and 2) and CD-I-Ready; Photo CD (single and multi-session); video CD; DVD (single- and double-layer); DVD-R; DVD-RW; DVD-RW Multi-Border; DVD+R; DVD+R Multisession , and DVD+RW
	<b>Capacity</b>	180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm); 4.7 GB (DVD-5); 8.54 GB (DVD-9); 9.4 GB (DVD-10)
	<b>CD-ROM, CD-R, CD-RW read</b>	7200 KB/s (48X) Max
	<b>DVD ROM read</b>	21,632 KB/s (16X ) Max
<b>Writeable Disc Parameters</b>	<b>Disc Type</b>	CD-R and CD-RW
	<b>Write Methods</b>	Disc at Once, Track at Once, Session at Once, Variable Packet, Fixed Packet
	<b>Format and Modes Supported</b>	CD-ROM (mode 1); CD-ROM XA (mode 2, forms 1 and 2); CD digital audio, CD-I (mode 2, forms 1 and 2); video CD; CD-Bridge; Video CD
	<b>Capacity</b>	180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (mode 2, 12 cm)
<b>Access Times</b> (typical reads, including settling)	<b>CD-R write</b>	7200 KB/s (48X) Max
	<b>CD-RW write</b>	4800 KB/s (32X) Max
	<b>Random DVD</b>	< 140 ms (typical)
	<b>Random CD</b>	< 125 ms, (typical)
	<b>Full Stroke DVD</b>	< 250 ms (seek)
	<b>Full Stroke CD</b>	< 210 ms (seek)
	<b>Startup Time (single)</b>	< 7 seconds (typical)
	<b>Startup Time (multi-session)</b>	< 30 seconds (typical)
	<b>Stop Time</b>	< 4 seconds
	<b>Cache Buffer</b>	2 MB (minimum)
	<b>Data Transfer Modes</b>	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 44 Mbytes/s (default)

## Technical Specifications - Optical Devices

<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
	<b>DC Power Requirement</b>	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
	<b>DC Current</b>	5 VDC (< 1000 mA typical, < 1600 mA maximum) 12 VDC (< 600 mA typical, < 1400 mA maximum)
	<b>Total Drive Power (standby mode)</b>	< 2.5 Watt
<b>Audio Output</b>	<b>Line-Out</b>	0.7 VRMS
	<b>Signal-to-Noise Ratio</b>	74 dB
	<b>Channel Separation</b>	65 dB
<b>Configuration Jumper Block</b>	Master, slave, and cable select modes	
<b>Data Interface Connector</b>	40-pin, shrouded and keyed, flat ribbon	
<b>Operating Environmental (all conditions non-condensing)</b>	<b>Temperature</b>	41° to 122° F (5° to 50° C)
	<b>Relative humidity</b>	10% to 90%
	<b>Maximum wet bulb temperature</b>	86° F (30° C)
<b>Certifications, Requirements</b>	MPC-3 compliant, multi-read requirements, ATA Spec X3T9.2, ATAPI Spec SFF-8020, ANSI C63.4-1992, UL 1950, ACA AS/NZS 3548, CB Bulletin No. 96A, CSA C22.2 No. 950-1995, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, EMKO-TSE 07/94, TUV EN60950, EN60825-1, MIC, BSMI-CNS 13438, CE, Microsoft PC2001 certification, Microsoft Logo for Windows XP and 2000.	
<b>Operating Systems Supported</b>	Windows 2000, XP Professional, and XP Professional x64 Edition Red Hat Linux 7.2, 7.3 and WS3 Versions	
<b>Option Kit Contents</b>	48X Combo CD-RW/DVD-ROM Drive, Roxio Easy CD & DVD Creator, InterVideo WinDVD MPEG Movie Playback software, Dantz Retrospect Express Backup software, audio cable, and installation guide.	

<b>16X DVD+/-RW, Dual-Layer (Win and RHWS3)</b>	<b>Height</b>	5.25-inch, half-height, tray-load
	<b>Orientation</b>	Either horizontal or vertical
	<b>Interface Type</b>	ATAPI/EIDE
	<b>Disc Recording Capacity</b>	4.7 GB (single-layer), 8.5 GB (double-layer)
	<b>Dimensions (W x H x D)</b>	5.9 x 1.7 x 7.9 in (15.0 x 4.4 x 20.0 cm)
	<b>Weight (maximum)</b>	2.6 lb (1.2 kg)
	<b>Recording Method</b>	Disc-at-once, Track-at-once, and Session-at-once; Variable Packet and Fixed Packet
	<b>Write Support</b>	DVD+R (1.3), DVD+R DL (1.0), DVD+RW (1.2), DVD-R (2.0), DVD-RW (1.1), CD-R (OBII Vol2.0 Rev 1.2), CD-RW (LS, HS, US)
	<b>Read Support</b>	DVD-ROM (single- and dual-layer), DVD-Video, DVD+R (include multisession), DVD+RW, DVD-R (incl. multiborder), DVD-RW, DVD-MRW; CD-ROM Mode 1, CD-ROM XA (Mode 2, forms 1 and 2), CD-TEXT, Photo CD single- and multi-session), CD-DA (Audio CD), CD-Extra, CD-R, CD-RW (supports AM2), VCD, CD-I, UDF (1.02 and 1.50), CD-MRW

## Technical Specifications - Optical Devices

<b>Write Speed</b> (maximum)	<b>DVD+R</b>	16X CAV (21,600 KB/s), 8x ZCLV (10,800 KB/s), 2.4-8x CLV (3250-10,800 KB/s)	
	<b>DVD+RW</b>	2.4-4X CLV (3250-5400 KB/s)	
	<b>DVD-R</b>	2-4X CLV (2700-5400 KB/s), 8X ZCLV (10,800 KB/s)	
	<b>DVD-RW</b>	2-4X CLV (2700-5400 KB/s)	
	<b>CD-R</b>	16-40X CAV (2400-6000 KB/s)	
	<b>CD-RW (US)</b>	4-24X CLV (600-3600 KB/s)	
	<b>Read Speed</b> (maximum)	<b>DVD-ROM</b>	5-16X CAV (6750 - 21,600 KB/s)
		<b>DVD+R, DVD+RW, DVD-R, DVD-RW</b>	4-8X CAV (5400 - 10,800 KB/s)
		<b>CD-ROM, CD-R, CD-RW, CD-Audio</b>	16-40X CAV (2400 to 6000 KB/s)
		<b>Random DVD</b>	< 130 ms (typical)
<b>Access Time</b> (typical reads, including settling)	<b>Random CD</b>	< 120 ms, (typical)	
	<b>Full Stroke DVD</b>	< 240 ms (seek)	
	<b>Full Stroke CD</b>	< 200 ms (seek)	
	<b>Startup Time</b> (single)	< 7 seconds (typical)	
	<b>Startup Time</b> (multi-session)	< 30 seconds (typical)	
	<b>Stop Timex</b>	< 4 seconds	
	<b>Cache Buffer</b>	2 MB (minimum)	
	<b>Data Transfer Modes</b>	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s) (default on most HP <i>xw</i> workstations)	
	<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
		<b>DC Power Requirement</b>	5 VDC $\pm$ 5%-100 mV ripple p-p
12 VDC $\pm$ 10%-200 mV ripple p-p			
<b>DC Current</b>		5 VDC (< 2000 mA typical, < 2500 mA maximum)	
		12 VDC (< 700 mA typical, < 2000 mA maximum)	
<b>Audio Output</b>	<b>Total Drive Power</b> (standby mode)	< 2.5 Watt	
	<b>Line-Out</b>	0.7 VRMS	
	<b>Signal-to-Noise Ratio</b>	74 dB	
	<b>Channel Separation</b>	65 dB	
<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)	
	<b>Relative humidity</b>	10% to 90%	
	<b>Maximum wet bulb temperature</b>	86° F (30° C)	
<b>System Configuration</b>	Intel Pentium IV Processor or later with 128 MB of memory (required); 256 MB recommended 2-D or 3-D graphics cards on primary disk drive for operating system and application software; second disk drive for audio and video data		

## Technical Specifications - Optical Devices

<b>Operating Systems Support</b>	Windows 2000, XP Professional, and XP Professional x64 Edition Red Hat Linux 7.2, 7.3 and WS3 Versions (Red Hat Linux 7.2, 7.3, 8, 9.0 may require additional third party software to make full use of this device)															
<b>Regulatory Approvals</b>	MPC-3 and MMC-4 compliant, multi-read certified, ATA Spec X3T9.2, ATAPI Spec T13.1153D, ANSI C63.4-1992, UL 60950, ACA AS/NZS 3548, CB Bulletin No. 96A, CSA C22.2 No. 60950, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, EMKO-TSE 07/94, TUV EN60950, EN60825-1, MIC Class B, BSMI-CNS 13438, CE EN60950, EN55022:1998 and EN55024, Microsoft Logo for Windows XP, relevant parts of IEC 61000-4.															
<b>Option Kit contents</b>	16X DVD±R/±RW Drive, InterVideo WinDVD, InterVideo WinDVD Creator, Roxio Easy Media Creator, Dantz Retrospect Express Backup Software, installation guide, and DVD+R media. <b>NOTE:</b> This DVD writer kit does not include any software for burning DVDs on Linux. DVD burning is supported with the 'growisofs' command. CD burning is supported with the 'cdrecord' command. Red Hat Enterprise Linux WS 3 distribution includes both 'cdrecord' and 'growisofs'. Red Hat Linux 7.2, 7.3, 8, 9.0 distributions only include 'cdrecord'. Therefore DVD burning is only supported on WS 3.															
<b>16X DVD+/-RW LightScribe drive</b>	<b>Height</b>	5.25-inch, half-height, tray-load														
	<b>Orientation</b>	Either horizontal or vertical														
	<b>Interface Type</b>	ATAPI/EIDE														
	<b>Disc Recording Capacity</b>	8.5 GB DL or 4.7 GB standard														
	<b>Dimensions (W x H x D)</b>	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)														
	<b>Weight (maximum)</b>	2.6 lb (1.2 kg)														
	<b>Write Speed (maximum)</b>	<table border="0" style="width: 100%;"> <tr> <td style="padding-right: 20px;">DVD+R</td> <td>Up to 16X</td> </tr> <tr> <td>DVD+RW</td> <td>Up to 4X</td> </tr> <tr> <td>DVD+R DL</td> <td>Up to 2.4X</td> </tr> <tr> <td>DVD-R</td> <td>Up to 8X</td> </tr> <tr> <td>DVD-RW</td> <td>Up to 4X</td> </tr> <tr> <td>CD-R</td> <td>Up to 40X</td> </tr> <tr> <td>CD-RW</td> <td>Up to 24X</td> </tr> </table>	DVD+R	Up to 16X	DVD+RW	Up to 4X	DVD+R DL	Up to 2.4X	DVD-R	Up to 8X	DVD-RW	Up to 4X	CD-R	Up to 40X	CD-RW	Up to 24X
DVD+R	Up to 16X															
DVD+RW	Up to 4X															
DVD+R DL	Up to 2.4X															
DVD-R	Up to 8X															
DVD-RW	Up to 4X															
CD-R	Up to 40X															
CD-RW	Up to 24X															
	<b>Read Speed (maximum)</b>	<table border="0" style="width: 100%;"> <tr> <td style="padding-right: 20px;">DVD+R/-R/+RW/-RW/+R DL</td> <td>Up to 8X</td> </tr> <tr> <td>DVD-ROM</td> <td>Up to 16X</td> </tr> <tr> <td>CD-ROM, CD-R</td> <td>Up to 40X</td> </tr> <tr> <td>CD-RW</td> <td>Up to 32X</td> </tr> </table>	DVD+R/-R/+RW/-RW/+R DL	Up to 8X	DVD-ROM	Up to 16X	CD-ROM, CD-R	Up to 40X	CD-RW	Up to 32X						
DVD+R/-R/+RW/-RW/+R DL	Up to 8X															
DVD-ROM	Up to 16X															
CD-ROM, CD-R	Up to 40X															
CD-RW	Up to 32X															

## Technical Specifications - Optical Devices

	<b>Access Time</b> (typical reads, including settling)	<b>Random</b>	DVD: < 130 ms (typical), CD: < 120 ms (typical)
		<b>Full Stroke</b>	DVD: < 240 ms (seek), CD: < 200 ms (seek)
		<b>Startup Time</b>	Single-session: < 15 seconds (typical), Multi-session: < 30 seconds (typical)
		<b>Stop Time</b>	< 4 seconds
		<b>Cache Buffer</b>	2 MB (minimum)
		<b>Data Transfer Modes</b>	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s -default)
	<b>Power</b>	<b>Source</b>	Four-pin, DC power receptacle
		<b>DC Power Requirement</b>	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 10%-200 mV ripple p-p
		<b>DC Current</b>	5 VDC (< 2000 mA typical, < 2500 mA maximum)
			12 VDC (< 700 mA typical, < 2000 mA maximum)
<b>Total Drive Power</b> (standby mode)		< 2.5 Watt	
<b>Audio Output</b>	<b>Line-Out</b>	0.7 VRMS	
	<b>Signal-to-Noise Ratio</b>	74 dB	
	<b>Channel Separation</b>	65 dB	
<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)	
	<b>Relative humidity</b>	10% to 90%	
	<b>Maximum wet bulb temperature</b>	86° F (30° C)	
<b>System Configuration</b>	Intel Pentium III Processor or later with 128 MB of memory (required); 256 MB recommended 2-D or 3-D graphics cards on primary disk drive for operating system and application software; second disk drive for audio and video data		
<b>Operating Systems Support</b>	Microsoft Windows 2000, Windows XP Professional, Windows XP Home		
<b>Regulatory Approvals</b>	MPC-3 compliant, multi-read requirements, ATA Spec X3T9.2, ATAPI Spec T13.1153D, ANSI C63.4-1992, UL 1950, ACA AS/NZS 3548, CB Bulletin No. 96A, CSA C22.2 No. 950-1995, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, EMKO-TSE 07/94, TUV EN60950, EN60825-1, MIC, BSMI-CNS 13438, CE, Microsoft PC2001 certification, Microsoft Logo for Windows XP and 2000.		
<b>Option Kit contents</b>	16X DVD+/-RW LightScribe drive, LightScribe software, InterVideo WinDVD, InterVideo WinDVD Creator, Roxio Easy Media Creator 7, Dantz Retrospect Express Backup Software, installation guide, and DVD+R media.		

## Technical Specifications - Graphics

<b>NVIDIA Quadro NVS 280 (PCI)</b>	<b>Form Factor</b>	ATX
	<b>Graphic Controller</b>	Integrated Quadro 280 2-D graphics processor unit (GPU)
	<b>VGA controller</b>	Integrated into the Quadro GPU
	<b>Bus type</b>	PCI
	<b>RAMDAC</b>	Dual 350 MHz
	<b>Memory</b>	64 MB DDR with frame buffer and Texture storage
	<b>Connector</b>	Single High-density Flex Connector
	<b>Dimensions</b>	Low-profile, 2.586 x 6.6 in (6.57 x 16.76 cm)
	<b>Controller clock speed</b>	275 MHz
	<b>Color planes</b>	32-bit color buffer
	<b>Overlay planes</b>	1 16-bit Video overlay plane
	<b>Maximum vertical refresh rate</b>	120 Hz
	<b>Maximum pixel clock</b>	350 MHz
	<b>Multi-monitor support</b>	Dual analog or digital monitors
	<b>Single DVI Support</b>	Yes
	<b>Dual DVI Support</b>	Yes
	<b>High-definition Video Processor (HDVP)</b>	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
	<b>Available graphics drivers</b>	Microsoft Windows 2000 and Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode) Red Hat Linux HP qualified drivers may be preloaded or available from the HP support web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .



## Technical Specifications - Graphics

<p><b>NVIDIA Quadro NVS 280 Graphics Card (PCI-Express)</b></p>	<p><b>Form Factor</b></p> <p><b>Graphics Controller</b></p> <p><b>VGA controller</b></p> <p><b>Bus Type</b></p> <p><b>RAMDAC</b></p> <p><b>Memory</b></p> <p><b>Connectors</b></p> <p><b>Multi-monitor support</b></p> <p><b>Additional product features</b></p>	<p>ATX</p> <p>Integrated Quadro 280 2-D graphics processor unit (GPU)</p> <p>Integrated into the Quadro GPU</p> <p>PCI-Express x16 or PCI</p> <p>Dual 350 MHz integrated</p> <p>64 MB 000 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage</p> <p>Single High-density Flex Connector</p> <p>Dual integrated analog display controllers supporting up to two analog displays at 1920 x1200 @ 85Hz or two digital displays at 1600x1200 @ 60Hz</p> <p><b>Controller clock speed</b> 250 MHz</p> <p><b>Color planes</b> 32-bit color buffer</p> <p><b>Overlay planes</b> 1 16-bit Video overlay plane</p> <p><b>Maximum vertical refresh rate</b> 120 Hz</p> <p><b>Maximum pixel clock</b> 350 MHz</p> <p><b>Single DVI Support</b> Yes</p> <p><b>Dual DVI Support</b> Yes</p> <p><b>High-definition Video Processor (HDVP)</b> Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling</p>
<p><b>PCI-Express</b></p> <p><b>Available graphics drivers</b></p>	<p>Supports X16 PCI-E</p> <p>Microsoft Windows® XP or Windows 2000 (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode)</p> <p>HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a>.</p>	

## Technical Specifications - Graphics

NVIDIA Quadro4 NVS 400 Graphics Card	Form Factor	ATX
	Graphics Controller	Integrated Quadro4 2D/3D 128-bit graphics processor unit (GPU)
	Bus Type	PCI
	RAMDAC	Dual 350 MHz
	Memory	64 MB 220 MHz, 4mx 32 DDR per GPU, 32-MB per GPU unified frame buffer
	Connectors	Dual LFH-60
	Dimensions	Low-profile form factor
	Multi-monitor support	1 to 4 displays with nView – with two cards (1 PCI per card), up to 8 monitors can be driven
	nView Hardware Architecture	32-bit color 2048x1536 @ 75Hz maximum resolution Dual 350 MHz RAMDACs Integrated TMDS Digital Vibrance Control (DVC) High-performance 2D rendering engine Optimized for 32-, 24-, 16-, 15- and 8-bpp modes
	High-definition video processor (HDVP)	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT Motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
	Supported graphics APIs	Fully compliant with OpenGL 1.3 and DirectX 8.1
	Available graphics drivers	Microsoft Windows XP and Microsoft Windows 2000, Linux See: <a href="http://www.hp.com/support/workstation_drivers/">http://www.hp.com/support/workstation_drivers/</a>

NVIDIA Quadro FX 330 Graphics Card	Form Factor	ATX
	Graphics Controller	NVIDIA Nv37GL
	Bus Type	PCI-Express x16
	Memory	64 MB 000 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage
	Connectors	DMS-59 output supporting up to two analog or digital (with optional cable) displays
	Multi-monitor support	Dual integrated analog display controllers supporting up to two analog displays at 2048 x1536 @ 60Hz or two digital displays at 1600x1200 @ 60Hz
	RAMDAC	Dual 350 MHz integrated

## Technical Specifications - Graphics

<b>Architecture features</b>	64-bit memory interface 128-bit IEEE floating-point precision graphics pipeline 128-bit color precision 12-bit sub-pixel precision 4x FSAA at 1024x768 Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware accelerated occlusion culling 3D volumetric texture support
<b>Shading architecture</b>	Fully programmable GPU Optimized compilers for Cg, OpenGL shading language, and Microsoft HLSL
<b>Supported graphics APIs</b>	OpenGL 1.5 DirectX 9.0
<b>Available graphics drivers</b>	HP-tested: Microsoft Windows® XP, Windows 2000, and Linux HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .
<b>Maximum Resolution</b>	Dual DVI-I output with optional cable – drives dual digital displays at resolutions up to 1600x1200 @ 60Hz Internal 350MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 60Hz each

### ATI FireGL V3100 Graphics Card

<b>Form Factor</b>	ATX
<b>Graphics Controller</b>	RV370
<b>Bus Type</b>	PCI-Express x16
<b>Memory</b>	128MB 200MHz DDR unified frame buffer, Z-buffer and Texture storage
<b>Connectors</b>	1 DVI-I analog/digital and 1 VGA analog monitor output
<b>Multi-monitor support</b>	Dual integrated display controllers supporting up to 2048x1536 @ 85Hz on both displays
<b>RAMDAC</b>	Dual 400 MHz integrated
<b>Architecture features</b>	128-bit memory interface 128-bit IEEE floating-point precision 24-bits per RGBA color precision 4-bit sub-pixel precision 2 parallel geometry engines 4 parallel pixel pipelines 2x/4x/6x FSAA Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware accelerated occlusion culling Hardware accelerated clip planes

## Technical Specifications - Graphics

<b>Shading architecture</b>	Smartshader™ technology Programmable pixel and vertex shaders 16 textures per pass Pixel shaders up to 160 instructions with 32-bit floating point precision for each RGBA component Multiple render target support Shadow volume rendering acceleration High precision 10-bit per channel frame buffer support
<b>Supported graphics APIs</b>	OpenGL 1.5 DirectX 9.0
<b>Available graphics drivers</b>	HP-tested: Microsoft Windows XP, Windows 2000, and Linux HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .
<b>Maximum Resolution</b>	DVI-I output – drives digital display at resolutions up to 1600x1200 Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 85Hz each

NVIDIA Quadro FX 540 PCI-Express Graphics Card	<b>Form Factor</b>	ATX, 4.376" x 7.0" Single slot
	<b>Graphics Controller</b>	NVIDIA NV43GL
	<b>Bus Type</b>	PCI-Express x16, <75W power consumption
	<b>RAMDAC</b>	Dual 400 MHz integrated
	<b>Memory</b>	128 MB 275 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage 8.8 GB/sec graphics memory bandwidth
	<b>Connectors</b>	DVI-I + VGA + 10-pin HDTV Out (HD cable purchased separately)
	<b>Multi-monitor support</b>	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 75Hz, one digital display at 1600x1200 @ 60Hz.
	<b>Additional product features</b>	128 KB BIOS 3.3V Flash ROM reprogrammable by SW Hardware accelerated Overlay Planes Hardware accelerated two-sided lighting Hardware accelerated antialiased points and lines 3D Volumetric Texture support Hardware accelerated Occlusion Culling Compliant with Microsoft/Intel PC2001 Workstation requirements Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications DDC2B+ Monitor support on all OS platforms ACPI Version 1.0b Power Management support (all modes)
	<b>Shading architecture</b>	Fully programmable GPU (OpenGL1.5/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution Optimized compilers for Cg, OpenGL shading language, and Microsoft HLSL
	<b>Supported graphics APIs</b>	OpenGL 1.5 ICD with immediate mode support for all OGL primitive types DirectX 9.0c

## Technical Specifications - Graphics

<b>Available graphics drivers</b>	HP-tested: Microsoft Windows XP, Windows 2000, and Linux HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .
<b>Maximum Resolution</b>	DVI-I output - drives digital display at resolutions up to 1600x1200 @ 60Hz Internal 400MHz RAMDACs - drives dual analog displays up to 2048x1536 @ 75Hz each

---

<b>NVIDIA Quadro FX 1300 Graphics Card</b>	<b>Form Factor</b>	ATX
	<b>Graphics Controller</b>	NVIDIA NV38GL
	<b>Bus Type</b>	PCI-Express x16
	<b>Memory</b>	128 MB 275 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage
	<b>Connectors</b>	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	<b>Multi-monitor support</b>	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 60Hz on both displays or dual digital displays at 1600x1200 @ 60Hz  NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows
	<b>RAMDAC</b>	Dual 400 MHz integrated
	<b>Architecture features</b>	256-bit memory interface 128-bit IEEE floating-point precision graphics pipeline 128-bit color precision 12-bit sub-pixel precision 4x FSAA at 1280x1024 Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware accelerated occlusion culling 3D volumetric texture support Quad-buffered stereo
	<b>Shading architecture</b>	Fully programmable GPU Optimized compilers for Cg, OpenGL shading language, and Microsoft HLSL
	<b>Supported graphics APIs</b>	OpenGL 1.5 DirectX 9.0
	<b>Available graphics drivers</b>	HP-tested: Microsoft Windows® XP, Windows 2000, and Linux HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .
	<b>Maximum Resolution</b>	Dual DVI-I output – drives dual digital displays at resolutions up to 1600x1200 @ 60Hz  Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 75Hz each

---

## Technical Specifications - Graphics

NVIDIA Quadro FX 1400	Form Factor	ATX, 4.376" x 8.5"
PCI-Express Graphics Controller		Single slot
	Graphics Controller	NVIDIA NV41GL
	Bus Type	PCI-Express x16, <75W power consumption
	RAMDAC	Dual 400 MHz integrated
	Memory	128 MB 300 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage 19.2 GB/s graphics memory bandwidth
	Connectors	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	Multi-monitor support	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays.
	Additional product features	128 KB BIOS 3.3V Flash ROM reprogrammable by SW Hardware accelerated Overlay Planes Hardware accelerated two-sided lighting Hardware accelerated antialiased points and lines Quad-buffered Stereo 3D Volumetric Texture support Hardware accelerated Occlusion Culling Scalable Link Interface (SLI) technology Compliant with Microsoft/Intel PC2001 Workstation requirements Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications DDC2B+ Monitor support on all OS platforms ACPI Version 1.0b Power Management support (all modes)
	Shading architecture	Fully programmable GPU (OpenGL1.5/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution Optimized compilers for Cg, OpenGL shading language, and Microsoft HLSL
	Supported graphics APIs	OpenGL 1.5 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
	Available graphics drivers	HP-tested: Microsoft Windows XP, Windows 2000 and Linux HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .
	Maximum Resolution	Dual DVI-I output – drives dual digital displays at resolutions up to 1900x1200 @ 60Hz Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 85Hz each

## Technical Specifications - Graphics

<b>NVIDIA Quadro FX 3400 Graphics Card</b>	<b>Form Factor</b>	ATX
	<b>Graphics Controller</b>	NVIDIA NV45GL
	<b>Bus Type</b>	PCI-Express x16
	<b>Memory</b>	256 MB 450 MHz GDDR3 SDRAM unified frame buffer, Z-buffer and Texture storage
	<b>Connectors</b>	2 DVI-I (one dual-link/one single-link) analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	<b>Multi-monitor support</b>	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays or dual digital displays at 1600x1200 (single-link) and 3840x2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows
	<b>RAMDAC</b>	Dual 400 MHz integrated
	<b>Architecture features</b>	256-bit memory interface 128-bit IEEE floating-point precision graphics pipeline 128-bit color precision 12-bit sub-pixel precision 8x FSAA at 1920x1200, 4x at 2048x1536, rotated grid FSAA sampling algorithm Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes 3rd generation occlusion culling 3D volumetric texture support Quad-buffered stereo
	<b>Shading architecture</b>	Dual Link DVI enabling driving digital displays up to 3840x2400 (24Hz) Fully programmable GPU Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
	<b>Supported graphics APIs</b>	OpenGL 1.5 DirectX 9.0
	<b>Available graphics drivers</b>	HP-tested: Microsoft Windows® XP, Windows 2000, and Linux HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .
	<b>Maximum Resolution</b>	Dual DVI-I output – drives dual digital displays at resolutions up to 1600x1200 @ 60Hz (single-link) and 3840x2400 @ 24Hz (dual-link). Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 75Hz each

## Technical Specifications - Graphics

ATI FireGL V5100 PCI-Express Graphics Controller	Form Factor	ATX
	Graphics Controller	RV423
	Bus Type	PCI-Express x16
	Memory	128 MB 350MHz DDR unified frame buffer, Z-buffer and Texture storage
	Connectors	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	Multi-monitor support	Dual integrated display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays.
	RAMDAC	Dual 400 MHz integrated
	Architecture features	256-bit memory interface 128-bit IEEE floating-point precision 24-bits per RGBA color precision 8-bit sub-pixel precision 6 parallel geometry engines 12 parallel pixel pipelines 2x/4x/6x FSAA Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware accelerated occlusion culling Hardware accelerated clip planes Quad-buffered stereo
	Shading architecture	Smartshader™ technology Programmable pixel and vertex shaders 16 textures per pass Pixel shaders up to 160 instructions with 32-bit floating point precision for each RGBA component Multiple render target support Shadow volume rendering acceleration High precision 10-bit per channel frame buffer support
	Supported graphics APIs	OpenGL 1.5 DirectX 9.0
	Available graphics drivers	HP-tested: Microsoft Windows XP, Windows 2000, and Linux HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/eng/software_drivers.html">http://welcome.hp.com/country/us/eng/software_drivers.html</a> .
	Maximum Resolution	DVI-I output – drives digital displays at resolutions up to 1600x1200 Internal 400MHz RAMDAC – drives dual analog displays up to 2048x1536 @ 85Hz each



## Technical Specifications - Monitors

<b>HP L1755 Flat Panel Monitor</b>	<b>Panel</b>	<b>Type</b>	Active matrix, thin film transistor (TFT)	
			<b>Viewable Image Area</b> (diagonal)	17 in (43.2 cm) maximum viewable
			<b>Screen Opening</b> (WxH)	13.4 x 10.7 in (33.9 x 27.2 cm)
			<b>Viewing Angle</b> (typical)	176 degrees horizontal/176 degrees vertical (10:1 minimum contrast ratio)
			<b>Brightness</b> (typical)	Up to 250 nits (cd/m <sup>2</sup> )
			<b>Contrast Ratio</b> (typical)	Up to 1000:1 (typical)
			<b>Response Rate</b> (typical)	25 ms (typical rise + fall)
			<b>Pixel Pitch</b>	0.264 mm
			<b>Color Depth Support</b>	16.7 million colors
		<b>Video/Other Inputs</b>	<b>Plug and Play</b>	Yes (supports VESA DDC2B; PC2001 compliant)
		<b>Self Powered USB 2.0 Hub</b>	One upstream, four downstream ports (cable included)	
		<b>Input Signal</b>	Two connectors: one 15-pin mini D-sub analog VGA; and one DVI-I (VGA analog or digital)	
		<b>Input Impedance</b>	75 ohms ± 2%	
		<b>Sync Input</b>	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)	
		<b>Video Cable</b>	VGA to VGA, DVI-D to DVI-D, and DVI-I to VGA	
		<b>Video Cable Length</b>	78 in (2.0 m)	
	<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>	30 to 82 kHz	
		<b>Vertical Frequency</b>	56 to 75 Hz	
		<b>Native Resolution</b>	1280 x 1024 @ 60 Hz analog 1280 x 1024 @ 60 Hz digital	
		<b>Maximum Resolution</b> (Analog)	1280 x 1024 @ 75 Hz analog	
		<b>Maximum Resolution</b> (Digital)	1280 x 1024 @ 75 Hz digital	
		<b>Preset VESA Graphic Modes</b> (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz, 72 Hz, 75 Hz 1024 x 768 @ 60 Hz, 70 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz	
		<b>Preset MAC Mode</b>	832 x 624 @ 75 Hz 1152 x 870 @ 75 Hz	
		<b>Preset VGA Mode</b>	640 x 480 @ 60 Hz, 72 Hz	
		<b>Preset SUN Mode</b>	1152 x 900 @ 76 Hz	
		<b>Fail Safe Mode</b>	Yes (limits out of range signal messages)	
		<b>Maximum Pixel Clock Speed</b>	140 MHz	
		<b>User Programmable Modes</b>	Yes, 15	
		<b>Anti-Glare</b>	Yes	

### Technical Specifications - Monitors

	Anti-Static	Yes
	AssetControl	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)
	Default Color Temperature	Yes (6500k, 9300k, SRGB, Custom User)
On Screen Display (OSD) Controls	Buttons or Switches	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch
	Languages	English, Spanish, French, German, Italian, Japanese, Simplified Chinese
	User Controls	Size and positioning, contrast, brightness, clock, clock phase, selectable color temperature, serial number, mode displayed, sleep timer, input selection, factory reset, individual color contrast, full-screen resolution
	Power	
	Power Supply	Auto-ranging, 90 to 265 VAC; internal power supply
	Input Power	100 ~ 240 VAC
	Nominal Current	1.5 A maximum
	Frequency	50 ~ 60 Hz
	Average	33 watts when displaying standard office software
	Typical Power Consumption	< 40 watts
	Maximum	< 60 watts
	Power Saving Off Mode	< 2 W 0 watts (when master power switch is in the off position)
	Power Cable Length	70 in (1.8 m); non-captive
Mechanical	Dimensions (H x W x D)	<b>Unpacked with stand</b> 16.1 (minimum) to 21.2 (maximum) x 14.4 x 8.3 in (40.9 (minimum) to 42.2 (maximum) x 36.5 x 21.1 cm)
		<b>Base Area</b> (Footprint D x W) 8.3 x 12.2 in (21.1 x 30.9 cm)
		<b>Panel only</b> (without stand) (H x W x D) 11.8 x 14.4 x 2.9 in (30.1 x 40.9 x 7.3 cm)
		<b>Weight</b> <b>Unpacked with stand</b> 14.7 lb (6.7 kg)
		<b>Unpacked without stand</b> 8.1 lb (3.7 kg)
		<b>Packaged</b> 20.2 lb (9.2 kg)
		<b>Bezel Width</b> 13 mm left and right, 14 mm top, and 15 mm bottom
	<b>Tilt Range</b> -5° to +35°	
	<b>Swivel Range</b> ± 50° horizontal swivel	
	<b>Height Adjustable</b> Yes (5.1 in/13 cm adjustment range)	

## Technical Specifications - Monitors

	<b>Pivot Rotation</b>	Yes, 90 °
	<b>Base</b>	Ships detached and is removable after installation
<b>Environmental</b>	<b>Temperature – Operating</b>	41° to 95° F (5° to 35° C)
	<b>Temperature – Non-operating</b>	-4° to 140° F (-20° to 60° C)
	<b>Humidity – Operating</b>	20% to 80%
	<b>Humidity – Non-operating</b>	5% to 95%
	<b>Altitude – Operating</b>	0 to 13,000 ft (0 to 4,000 m)
	<b>Altitude – Non-operating</b>	0 to 40,000 ft (0 to 12,192 m)
<b>Options</b>	<b>HP Desktop Access Center – Part number: DK985A</b>	Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions. Sold separately. For more information, refer to the HP Desktop Access Center QuickSpec document.
	<b>HP Flat Panel Speaker Bar – Part number: PF804AA</b>	Powered directly by the monitor, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec document.
	<b>HP Compaq 7000 Series Ultra-slim Desktop Integrated Work Center Stand – Part number: DL641B</b>	Allows mounting of a 15-, 17- or 19-inch HP flat panel monitor and an HP Compaq dc7100 Ultra-slim Desktop PC on a single stand for the convenience of an "all-in-one" form factor. Sold separately. For more information, refer to this product's QuickSpec document
<b>Other</b>	<b>Accessories Included</b>	VGA to VGA cable, DVI-D to DVI-D cable, DVI-I to VGA cable, USB cable, user CD-ROM with Pivot Pro software
	<b>Software</b>	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	<b>Software</b>	HP Display LiteSaver feature lets you schedule Sleep mode at preset times to help protect the display against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.

## Technical Specifications - Monitors

	<b>User Guide Languages</b>	English, Latin America Spanish, Brazilian Portuguese, Danish, Dutch, Finnish, French, German, Italian, Norwegian, Swedish, Greek, Polish, Russian, Slovenian, Turkish, Simplified Chinese, Traditional Chinese, Korean, and Japanese
	<b>Warranty Languages</b>	English, Canadian French, Latin America Spanish, Brazilian Portuguese, Danish, Dutch, Finnish, French, German, Italian, Norwegian, Spanish, Swedish, Bahasa Indonesian, Simplified Chinese, Traditional Chinese, and Korean
	<b>Color</b>	Carbonite, two-tone carbonite and silver (EMEA only)
	<b>VESA Mounting</b>	Yes (swing arm/wall mount not included); base must be removed for mounting options)
	<b>VESA External Mounting</b>	Yes (standard 4 hole pattern, 100 mm)
	<b>Kensington Lock-ready</b>	Yes
<b>Certification and Compliance</b>		Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCC Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification
<b>Compatibility</b>		VESA Video Signal Standard (VSI) Compliant video cards have been tested and proven compatible for use with the HP L1755 Flat Panel Monitor. Recommended for use with HP products.
<b>Service and Warranty</b>		Limited three-year parts and repair labor, service provider labor, and on-site service. Next business day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

HP L1955 Flat Panel Monitor	<b>Panel</b>	<b>Type</b>	Active matrix, thin film transistor (TFT)
		<b>Viewable Image Area</b>	19 in (48.25 cm) maximum viewable (diagonal)
		<b>Screen Opening (WxH)</b>	14.9 x 12.0 in (38.0 x 30.5 cm)
		<b>Viewing Angle (typical)</b>	176 degrees horizontal/176 degrees vertical (10:1 minimum contrast ratio)
		<b>Brightness (typical)</b>	Up to 250 nits (cd/m <sup>2</sup> )
		<b>Contrast Ratio (typical)</b>	Up to 1000:1 (typical)
		<b>Response Rate (typical)</b>	<16 ms (typical rise + fall)
		<b>Pixel Pitch</b>	0.294 mm
		<b>Color Depth Support</b>	16.7 million colors

## Technical Specifications - Monitors

Video/Other Inputs	<b>Plug and Play</b>	Yes (supports VESA DDC2B; PC2001 compliant)	
	<b>Self Powered USB 2.0 Hub</b>	One upstream, four downstream ports (cable included)	
	<b>Input Signal</b>	Two connectors: one 15-pin mini D-sub analog VGA; and one DVI-I (VGA analog or digital)	
	<b>Input Impedance</b>	75 ohms $\pm$ 2%	
	<b>Sync Input</b>	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)	
	Signal Interface/ Performance	<b>Video Cable</b>	VGA to VGA, DVI-D to DVI-D, and DVI-I to VGA
		<b>Video Cable Length</b>	78 in (2.0 m)
		<b>Horizontal Frequency</b>	30 to 82 kHz
		<b>Vertical Frequency</b>	56 to 75 Hz
		<b>Native Resolution</b>	1280 x 1024 @ 75 Hz analog 1280 x 1024 @ 60 Hz digital
		<b>Maximum Resolution (Analog)</b>	1280 x 1024 @ 75 Hz analog
		<b>Maximum Resolution (Digital)</b>	1280 x 1024 @ 75 Hz digital
		<b>Preset VESA Graphic Modes (non-interlaced)</b>	640 x 480 @ 60 Hz, 72 Hz, 75 Hz 720 x 400 @ 70 Hz 800 x 600 @ 60 Hz, 72 Hz, 75 Hz 1024 x 768 @ 60 Hz, 70 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz
		<b>Preset MAC Mode</b>	832 x 624 @ 75 Hz 1152 x 870 @ 75 Hz
<b>Preset VGA Mode</b>		640 x 480 @ 60 Hz, 72 Hz	
<b>Preset SUN Mode</b>		1152 x 900 @ 76 Hz	
<b>Fail Safe Mode</b>		Yes (limits out of range signal messages)	
<b>Maximum Pixel Clock Speed</b>		140 MHz	
On Screen Display (OSD) Controls		<b>User Programmable Modes</b>	Yes, 15
	<b>Anti-Glare</b>	Yes	
	<b>Anti-Static</b>	Yes	
	<b>AssetControl</b>	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)	
	<b>Default Color Temperature</b>	Yes (6500k, 9300k, SRGB, Custom User)	
	<b>Buttons or Switches</b>	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch	
	<b>Languages</b>	English, Spanish, French, German, Italian, Japanese, Simplified Chinese	
	<b>User Controls</b>	Size and Positioning Contrast	

		Brightness	
		Clock, Clock Phase	
		Selectable Color Temperature	
		Serial Number	
		Mode Displayed	
		Sleep Timer	
		Input Selection	
		Factory Reset	
		Individual Color Contrast	
		Full-screen Resolution	
<b>Power</b>	<b>Power Supply</b>	Auto-ranging, 90 to 265 VAC; internal power supply	
	<b>Input Power</b>	100 ~ 240 VAC	
	<b>Nominal Current</b>	1.5 A maximum	
	<b>Frequency</b>	50 ~ 60 Hz	
	<b>Average</b>	33 watts when displaying standard office software	
	<b>Typical Power Consumption</b>	< 40 watts	
	<b>Maximum</b>	< 60 watts	
	<b>Power Saving Off Mode</b>	< 2 watts	
		0 watts (when master power switch is in the off position)	
	<b>Power Cable Length</b>	70 in (1.8 m); non-captive	
<b>Mechanical</b>	<b>Dimensions (H x W x D)</b>	<b>Unpacked with stand</b>	16.8 (minimum) to 22.3 (maximum) x 15.9 x 8.3 in (42.7 (minimum) to 56.6 (maximum) x 40.4 x 21.1 cm)
		<b>Base Area (Footprint D x W)</b>	8.3 x 12.2 in (21.1 x 30.9 cm)
		<b>Panel only (without stand) (H x W x D)</b>	13.2 x 15.9 x 3.1 in (33.5 x 40.4 x 7.9 cm)
	<b>Weight</b>	<b>Unpacked with stand</b>	16.5 lb (7.5 kg)
		<b>Unpacked without stand</b>	10.5 lb (4.75 kg)
		<b>Packaged</b>	23.5 lb (10.7 kg)
	<b>Bezel Width</b>	13 mm left and right, 14 mm top, and 15 mm bottom	
	<b>Tilt Range</b>	-5° to +35°	
	<b>Swivel Range</b>	± 50° horizontal swivel	
	<b>Height Adjustable</b>	Yes (5.1 in/13 cm adjustment range)	
	<b>Pivot Rotation</b>	Yes, 90 °	
	<b>Base</b>	Ships detached and is removable after installation	

## Technical Specifications - Monitors

<b>Environmental</b>	<b>Temperature – Operating</b>	41° to 95° F (5° to 35° C)
	<b>Temperature – Non-operating</b>	-4° to 140° F (-20° to 60° C)
	<b>Humidity – Operating</b>	20% to 80%
	<b>Humidity – Non-operating</b>	5% to 95%
	<b>Altitude – Operating</b>	0 to 13,000 ft (0 to 4,000 m)
	<b>Altitude – Non-operating</b>	0 to 40,000 ft (0 to 12,192 m)
<b>Options</b>	<b>Desktop Access Center</b>	Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions. Sold separately; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.
	<b>HP Flat Panel Speaker Bar</b>	Powered directly by the monitor, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features dual speakers with full sound range and external jack for headphones. Sold separately, part number PF804AA. For more information, refer to the HP Flat Panel Speaker Bar QuickSpecs.
<b>Other</b>	<b>Accessories Included</b>	VGA to VGA cable, DVI-D to DVI-D cable, DVI-I to VGA cable, USB cable, user CD-ROM with Pivot Pro software
	<b>Software</b>	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	<b>Software</b>	HP Display LiteSaver feature lets you schedule Sleep mode at preset times to help protect the display against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.
	<b>User Guide Languages</b>	English
	<b>Warranty Languages</b>	English
	<b>Color</b>	Carbonite, two-tone carbonite and silver (EMEA only)
	<b>VESA Mounting</b>	Yes (swing arm/wall mount not included); base must be removed for mounting options)
<b>VESA External Mounting</b>	Yes (standard 4 hole pattern, 100 mm)	
<b>Kensington Lock-ready</b>	Yes	

### Technical Specifications - Monitors

<b>Certification and Compliance</b>	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft® Windows® Certification
<b>Compatibility</b>	VESA Video Signal Standard (VSI) Compliant video cards have been tested and proven compatible for use with the HP L1955 Flat Panel Monitor. Recommended for use with HP products.
<b>Service and Warranty</b>	Limited three-year parts and repair labor, service provider labor, and on-site service. Next Business Day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

HP Flat Panel Monitor L2035	Panel	<b>Type</b>	20-inch Active Matrix TFT (thin film transistor)
		<b>Viewable Image Area</b> (diagonal)	20.1 in (51 cm)
		<b>Screen Opening</b> (W x H)	16.2 x 12.17 in (41.1 x 30.9 cm)
		<b>Viewing Angle</b> (typical)*	Up to 170° H/170° V (10:1 minimum contrast ratio)
		<b>Brightness</b> (typical*)	Up to 250 nits (cd/m <sup>2</sup> )
		<b>Contrast Ratio</b> (typical)*	Up to 400:1
		<b>Response Rate</b> (typical)*	16 ms (typical, rise + fall)
		<b>Pixel Pitch</b>	0.255 mm
		<b>Color Depth Support</b>	16.7 million colors
		*All specifications are provided by the component manufacturers. Performance specifications represent the highest specification of all HP's component manufacturers' typical level specifications for performance. Actual performance may vary either higher or lower.	
On Screen Display (OSD) Controls	<b>Buttons or Switches</b>	PiP (Picture in Picture), Input select, auto adjust, OSD up, OSD down, OSD menu select, power	
	<b>Languages</b>	English, French, German, Spanish, Italian	
	<b>User Controls</b>	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, video picture-in-picture (size and position), input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset	



## Technical Specifications - Monitors

Signal Interface/ Performance	Horizontal Frequency	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	Vertical Frequency	48 to 85 Hz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	Graphics Controller	Pixelworks PW171	
	Native Resolution	1600 x 1200 @ 60 Hz (recommended)	
	Preset VESA Graphic Modes (non-interlaced)	1600 x 1200 @ 60 Hz, 75 Hz (VGA input)	
		1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz	
		1280 x 960 @ 60 Hz	
		1152 x 900 @ 66 Hz	
		1024 x 768 @ 60 Hz, 75 Hz, 85 Hz	
		800 x 600 @ 60 Hz, 85 Hz	
		640 x 480 @ 60 Hz, 75 Hz, 85 Hz	
		Text Mode	720 x 400 @ 70 Hz
		Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
		Sun Mode	1152 x 900 @ 66 Hz
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)	
	User Programmable Modes	Yes, 10	
	Anti-Glare	Yes	
	Anti-Static	Yes	
	Default Color Temperature	6500 K	
	Video Input	Plug and Play	Yes
Input Signal		Four connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, and one s-video	
Input Impedance		75 ohms $\pm$ 10%	
Sync Input		Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
Video Cable		VGA to VGA; VGA to DVI-I; DVI-D to DVI-I	
Power	Video Cable Length	5.9 ft (1.8 m)	
	Input Power	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz	
	Frequency	47.5 to 63 Hz	
	Maximum	< 75 W	
	Power Saving	< 5 W	
	Power Cable Length	5.9 ft (1.8 m)	

## Technical Specifications - Monitors

Mechanical	Dimensions (H x W x D)	Unpacked with stand	17.36 to 20.9 x 17.8 x 8.27 in (44.1 to 53.1 x 45.2 x 21.0 cm)
		Unpacked without stand (head only)	14.29 x 17.8 x 3.19 in (36.3 x 45.2 x 8.1 cm)
		Packaged	11.5 x 21.9 x 23.9 in (29.2 x 55.6 x 60.6 cm)
	Weight	Unpacked	With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)
			Packaged
		Tilt Range	-5° to + 25° vertical
		Swivel Range	-35° to + 35°
	Environmental	Height Adjustable	Yes, range 3.54 in (9.0 cm)
		Pivot Rotation	Yes
		Base	Attached
Temperature – Operating		46° to 95° F (10° to 35° C)	
Temperature – Non-operating		6° to 140° F (-10° to 60° C)	
Humidity – Operating		20% to 80% non-condensing	
Humidity – Non-operating		5% to 85%	
Altitude – Operating		+12,000 ft (+3,657.6 m)	
Altitude – Non-operating	+40,000 ft (+12,192 m)		
Options	HP Desktop Access Center	Sold separately, the HP Desktop Access Center features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.	

## Technical Specifications - Monitors

<b>Other</b>	<b>Accessories Included</b>	<p>VGA to VGA cable – connects the graphic card's VGA analog connector to the monitor's input #1 (VGA analog) connector</p> <p>VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector</p> <p>DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector</p>
	<b>User Guide Languages</b>	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	<b>Warranty Languages</b>	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	<b>Color</b>	Carbonite/Silver
	<b>VESA External Mounting</b>	Yes (Standard 4 hole pattern, 100 mm)
	<b>Kensington Lock-Ready</b>	Yes
<b>Certification and Compliance</b>		<p>Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, *Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Windows Certification (Microsoft® Windows® 98, Microsoft Windows 2000, and Microsoft Windows XP)</p> <p><a href="#">* Energy Star Compliant available summer 2004.</a></p>
<b>Compatibility</b>		Compatible with platforms using the VESA standard video modes and HP Compaq Business Desktops d500, d300, and d200 Series, Compaq Evo Desktops, and HP Workstations
<b>Service and Warranty</b>		Limited three years parts, labor, and on-site service, including backlight. Availability varies by region. Certain restrictions and exclusions apply. Consult HP Customer Service for details.

<b>HP Flat Panel Monitor L2335</b>	<b>Panel</b>	<b>Type</b>	23-inch Active Matrix TFT (thin film transistor)
		<b>Viewable Image Area</b>	23 in (58.4 cm) (diagonal)
		<b>Screen Opening</b>	19.53 x 12.24 in (49.6 x 31.1 cm) (W x H)
		<b>Viewing Angle</b> (typical)*	Up to 170° H/170° V (10:1 minimum contrast ratio)
		<b>Brightness</b> (typical)*	Up to 250 nits (cd/m <sup>2</sup> )
		<b>Contrast Ratio</b> (typical)*	Up to 500:1

## Technical Specifications - Monitors

	<b>Response Rate (typical)*</b>	16 ms (typical, rise + fall)	
	<b>Pixel Pitch</b>	0.258 mm	
	<b>Color Depth Support</b>	16.7 million colors	
	* All specifications are provided by the component manufacturers. Performance specifications represent the highest specification of all HP's component manufacturers' typical level specifications for performance. Actual performance may vary either higher or lower.		
<b>On Screen Display (OSD) Controls</b>	<b>Buttons or Switches</b>	PiP (Picture in Picture), Input Select, Auto Adjust, OSD Up, OSD Down, OSD Menu Select, Power	
	<b>Languages</b>	English, French, German, Spanish, Italian	
	<b>User Controls</b>	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, video picture-in-picture (size and position), input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset	
<b>Signal Interface/ Performance</b>	<b>Horizontal Frequency</b>	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)	
	<b>Vertical Frequency</b>	48 to 85 Hz (VGA and DVI input)	
	<b>Graphics Controller</b>	Pixelworks PW172	
	<b>Native Resolution</b>	1920 x 1200 @ 60 Hz (recommended)	
	<b>Preset VESA Graphic Modes (non-interlaced)</b>		1920 x 1200 @ 60Hz
			1600 x 1200 @ 60 Hz, 75 Hz
			1280 x 1024 @ 60 Hz, 75Hz, 85 Hz
			1280 x 960 @ 60 Hz
			1152 x 900 @ 66 Hz
			1024 x 768 @ 60 Hz, 75 Hz, 85 Hz
			800 x 600 @ 60 Hz, 75Hz
		640 x 480 @ 60 Hz, 75 Hz	
		<b>Text Mode</b>	720 x 400 @ 70 Hz
		<b>Mac Mode</b>	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
		<b>Sun Mode</b>	1152 x 900 @ 66 Hz
	<b>Maximum Pixel Clock Speed</b>	202 MHz (VGA input); 162 MHz (DVI input)	
	<b>User Programmable Modes</b>	Yes, 10	
	<b>Anti-Glare</b>	Yes	
	<b>Anti-Static</b>	Yes	
	<b>Default Color Temperature</b>	6500 K	
<b>Video Input</b>	<b>Plug and Play Input Signal</b>	Yes Five connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, one s-video, component video	

### Technical Specifications - Monitors

	<b>Input Impedance</b>	75 ohms $\pm$ 10%
	<b>Sync Input</b>	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green
	<b>Video Cable</b>	VGA to VGA; VGA to DVI-I; DVI-D to DVI-I
	<b>Video Cable Length</b>	5.9 ft (1.8 m)
<b>Power</b>	<b>Input Power</b>	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz
	<b>Frequency</b>	47.5 to 63 Hz
	<b>Maximum</b>	< 100 W
	<b>Power Saving</b>	< 5 W
	<b>Power Cable Length</b>	5.9 ft (1.8 m)
<b>Mechanical</b>	<b>Dimensions (H x W x D)</b>	<b>Unpacked</b> 17.36 (min) to 20.9 (max) x 21.46 x 8.27 in (44.1 (min) to 53.1 (max) x 54.5 x 21.0 cm) <b>Unpacked without stand (head only)</b> 14.57 x 21.46 x 3.35 in (37.0 x 54.5 x 8.5 cm) <b>Packaged</b> 11.5 x 25.75 x 23.86 in (29.2 x 65.4 x 60.6 cm)
	<b>Weight</b>	<b>Unpacked</b> 22.27 lb (10.1 kg) <b>Packaged</b> 30.87 lb (14.0 kg)
	<b>Tilt Range</b>	-5° to + 25° vertical
	<b>Swivel Range</b>	-35° to + 35°
	<b>Height Adjustable</b>	Yes, range 3.54 in (9.0 cm)
	<b>Pivot Rotation</b>	Yes
	<b>Base</b>	Attached
<b>Environmental</b>	<b>Temperature – Operating</b>	46° to 95° F (10° to 35° C)
	<b>Temperature – Non-operating</b>	6° to 140° F (-10° to 60° C)
	<b>Humidity – Operating</b>	20% to 80% non-condensing
	<b>Humidity – Non-operating</b>	5% to 85%
	<b>Altitude – Operating</b>	+12,000 ft (+3,657.6 m)
	<b>Altitude – Non-operating</b>	+40,000 ft (+12,192 m)
<b>Options</b>	<b>HP Desktop Access Center</b>	Sold separately, the HP Desktop Access Center Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.

## Technical Specifications - Monitors

<b>Other</b>	<b>Accessories Included</b>	<p>VGA to VGA cable – connects the graphic card's VGA analog connector to the monitor's input #1 (VGA analog) connector</p> <p>VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector</p> <p>DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector</p>
	<b>User Guide Languages</b>	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	<b>Warranty Languages</b>	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	<b>Color</b>	Carbonite/silver
	<b>VESA External Mounting</b>	Yes (Standard 4 hole pattern, 100 mm)
	<b>Kensington Lock-Ready</b>	Yes
<b>Certification and Compliance</b>		<p>Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, *Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Windows Certification (Microsoft® Windows® 98, Microsoft Windows 2000, and Microsoft Windows XP).</p> <p>* <a href="#">Energy Star Compliant available summer 2004.</a></p>
<b>Compatibility</b>		Compatible with platforms using the VESA standard video modes and HP Compaq Business Desktops d500, d300, and d200 Series, Compaq Evo Desktops, and HP Business Desktops d300 series.
<b>Service and Warranty</b>		Limited three years parts, labor, and on-site service, including backlight. Availability varies by region. Certain restrictions and exclusions apply. Consult HP Customer Service for details.

© Copyright 2005 Hewlett-Packard Development Company, L.P.

All rights reserved. HP and the HP logo are trademarks of the Hewlett Packard Company in the U.S. and/or other countries.

Microsoft and Windows are trademarks of Microsoft Corporation in the U.S. and/or other countries. NVIDIA and Quadro are trademarks of NVIDIA Corporation. All other product names mentioned herein may be trademarks of their respective companies.

HP shall not be liable for technical or editorial errors or omissions contained herein. The information is provided as is without warranty of any kind and is subject to change without notice. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty

